




NOTES

1. TWO (2) TYPE OM4-3 AND W31(CA) SHALL BE PLACED L/3 FROM THE END OF EACH LANE, BUT NOT TO EXCEED A DISTANCE OF 10 FEET.
2. LENGTH OF METAL BEAM GUARD RAILING SHALL BE IN MULTIPLES OF 12'6", PLUS 1'9" FOR EACH END PIECE.

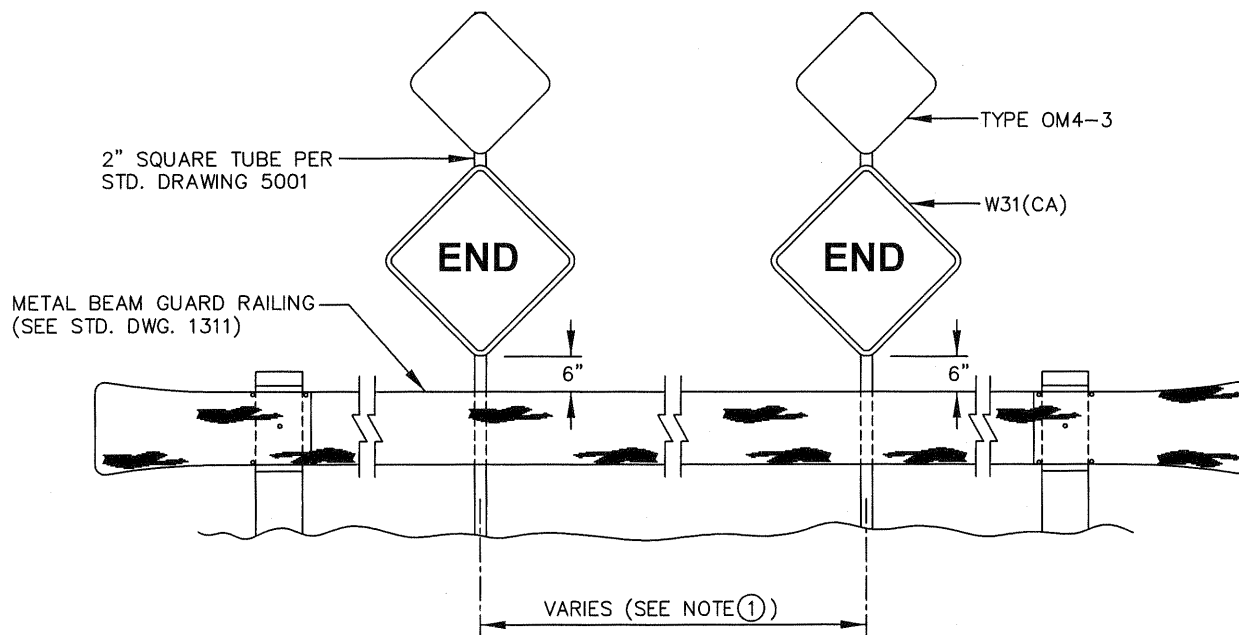

APPROVED BY: <i>John P. Sullivan</i>				
JOHN P. SULLIVAN CITY ENGINEER		24079	8/08/06	
		RCE	DATE	
RECOMMENDED: <i>Louis M. Geronzi</i>				
ASSISTANT CITY ENGINEER		44485	8/07/06	
		RCE	DATE	
REV	DESCRIPTION	BY	APP'D	DATE

CITY OF ONTARIO

TEMPORARY DEAD END
STREET GUARD RAIL

STANDARD
DRAWING
NUMBER

1310