

# **PRELIMINARY HYDROLOGY**

## **ARMSTRONG RANCH SPECIFIC PLAN**

### **A PORTION OF THE ONTARIO RANCH**

**City of Ontario  
County of San Bernardino**

**Prepared Date: November 2015**

**Prepared For:  
CV Communities, LLC  
3121 Michelson Drive, Suite 150  
Irvine, CA 92612  
(949) 258-7555**

**Prepared By:**

**MDS CONSULTING  
17350 Redhill Avenue, Suite 350  
Irvine, CA 92614  
(949) 251-8821**



*Stanley Morse*

Stanley C. Morse RCE 20596

11/06/15

Date

**M D S**  
CONSULTING

MORSE

17320 Redhill Ave.

Suite 350

Irvine, CA 92614

SCHULTZ

Voice: 949-251-8821

FAX: 949-251-0516

PLANNERS ENGINEERS SURVEYORS

Preliminary Hydrology  
Armstrong Ranch Specific Plan  
The Ontario Ranch  
City of Ontario, County of San Bernardino

JN 803-50  
November 2015



## TABLE OF CONTENTS

- A. Site/Project Description/Discussion
  - Discussion
  - Project Location Map
- B. Existing Condition Rational Method Hydrology Calculations
  - 10-Year Storm
  - 100-Year Storm
- C. Developed Condition Rational Method Hydrology Calculations
  - 10-Year Storm
  - 100-Year Storm
- D. Hydrologic Soils Group Map
  - Point Precipitation Frequency, NOAA Atlas 14, Vol. 6, Ver. 2

### Maps

- Site Plan
- Aerial Exhibit
- Existing Storm Drain Exhibit
- Proposed Storm Drain Exhibit
- Existing Condition Preliminary Hydrology Map
- Developed Condition Preliminary Hydrology Map
- Preliminary Water Quality Management Plan

# Armstrong Ranch Preliminary Hydrology

## A. Discussion

### PROJECT DESCRIPTION

The Armstrong Ranch Specific Plan (ARSP) project site is an approximately 199-acre parcel bounded by Riverside Drive on the north, Chino Avenue on the south, Vineyard Avenue on the west and Cucamonga Creek Channel on the east. The ARSP is a part of the western portion of the Ontario Ranch (formerly known as the New Model Colony). The ARSP proposes to develop the site for residential housing with trails, parks and an elementary school parcel. The project site was named after its former owners, the Armstrong family who farmed the land as a commercial nursery, a forerunner of the Armstrong Garden Centers who still exist as retail purveyors of nursery plants and gardening supplies. See ARSP Exhibit.

### EXISTING SITE CONDITIONS

The project site consists of undeveloped land formerly used for agricultural purposes and now generally laying fallow and unused. The site has been leveled and graded for various agricultural purposes in the past. The topography is very flat in the interiors due to the agricultural grading but generally slopes very gently from north to south from elevation 780 at Riverside Drive to 746 at Chino Avenue. Due to the berming of soil at the southern boundary of the ARSP and the agricultural grading, there are many internal sumps and other low spots that create shallow ponds that ultimately outlet to Chino Avenue. Riverside Drive and Chino Avenue are partially improved streets that function to carry east and west traffic around the ARSP. Carpenter Avenue exists as a paper street only while Hellman Avenue is a poorly paved road that serves as a minor north south connection between Riverside Drive and Chino Avenue. There are abandoned cow feeding bins and related milking buildings and other types of fenced areas. See Orthophoto Exhibit.

### EXISTING STORM DRAIN FACILITIES

San Bernardino County Flood Control District (SBCFCD) constructed the Riverside Drive Storm Drain Segment No. 2, Phase II (RDSD2) in the early part of this century. The RDSD2 storm drain system consists of a storm drain pipe in the west 700+/- feet of Riverside Drive (72" RCP), a storm drain pipe in Vineyard Avenue from Riverside Drive to Chino Avenue (120" RCP), and a storm drain pipe in Chino Avenue to just east of Hellman Avenue (144" RCP). The RDSD2 storm drain system outlets the storm waters into the Lower Cucamonga Spreading Grounds. The ARSP was hydrologically tabled to drain into the RDSD2 system. See Existing Storm Drain Exhibit.



## **PROPOSED STORM DRAIN SYSTEM**

The New Model Colony (now the Ontario Ranch) Master Plan of Drainage proposes two additional storm drain segments to be constructed to complete the master plan of drainage for the ARSP. A 60" storm drain (CHIN-XI-2) will be constructed from the existing 144" storm drain in Chino Drive northerly in Hellman Avenue to the southwest corner of the northerly planning area (PA 6). In the Master Plan of Drainage the CHIN-XI-2 called for a 42" storm drain; however the more detailed hydrologic calculations contained in this report requires a larger 60" storm drain pipe. A 72" storm drain will be constructed in Riverside Drive beginning at the east end of the existing 72" storm drain (RVSD-IV-1) westerly to Carpenter Drive. This extension will convey storm waters from the north side of Riverside Drive into the RDS2 system. See Proposed Storm Drain Exhibit.

The interior storm drain systems will be designed to intercept and convey a 100-year storm frequency storm in accordance with the City of Ontario's drainage policies.

## **EXISTING HYDROLOGY**

The existing undeveloped 100-year peak storm flows exiting the ARSP total 313 cfs. It is difficult to determine exactly where the storm flows would ultimately leave the ARSP due to the agricultural grading that has occurred in the past but ultimately, the storm waters would drain to the south across Chino Avenue. See Existing Hydrology Map.

## **PROPOSED HYDROLOGY**

The proposed developed 100-year storm flows leaving the ARSP total 431 cfs. All of the Ontario Ranch is not subject to hydromodification according to the San Bernardino County Flood Control Facilities in Zones 1, 2, and 3 Hydromodification Map. Hydromodification requires that the difference between the pre- and post-development storm flows be mitigated to be equal to or less than the pre-development storm flows. Since hydromodification is not required, the ARSP post-development storm flows can enter the adjacent SBCFCD storm drain facilities and proposed master plan storm drain systems. Although there will be an increase in the storm flow runoff with the development of the ARSP project, through construction of the ARSP in-tract storm drain facilities and the installation of the master plan storm drain systems, the ARSP project will not have significant unavoidable storm drain impacts. See Proposed Hydrology Map.

## **WATER QUALITY AND NPDES**

Each storm drain outfall from the ARSP is located adjacent to a park, a parklet, or a greenbelt paseo. These parks, parklets, and paseos will have underground infiltration chambers to infiltrate a portion of the storm waters into the substrata. A diversion weir will be constructed at each outfall to direct the first flush flows (Design Capture Volumes) to a structural BMP (a baffle box or equivalent) that will intercept trash and other pollutants partially cleansing the first flush flows before they enter the underground infiltration chambers for ultimate infiltration into the sub strata. The ARSP soils have excellent infiltration rates according to the on-site infiltration tests. See WQMP Exhibit.



## PROJECT LOCATION


The project site lies northeast quadrant of Vineyard Avenue and Chino Avenue, in the city of Ontario, county of San Bernardino.

Latitude: 34.013

Longitude: -117.605

Thomas Brothers Page: 642

Flood Control District Facility: Zone 1

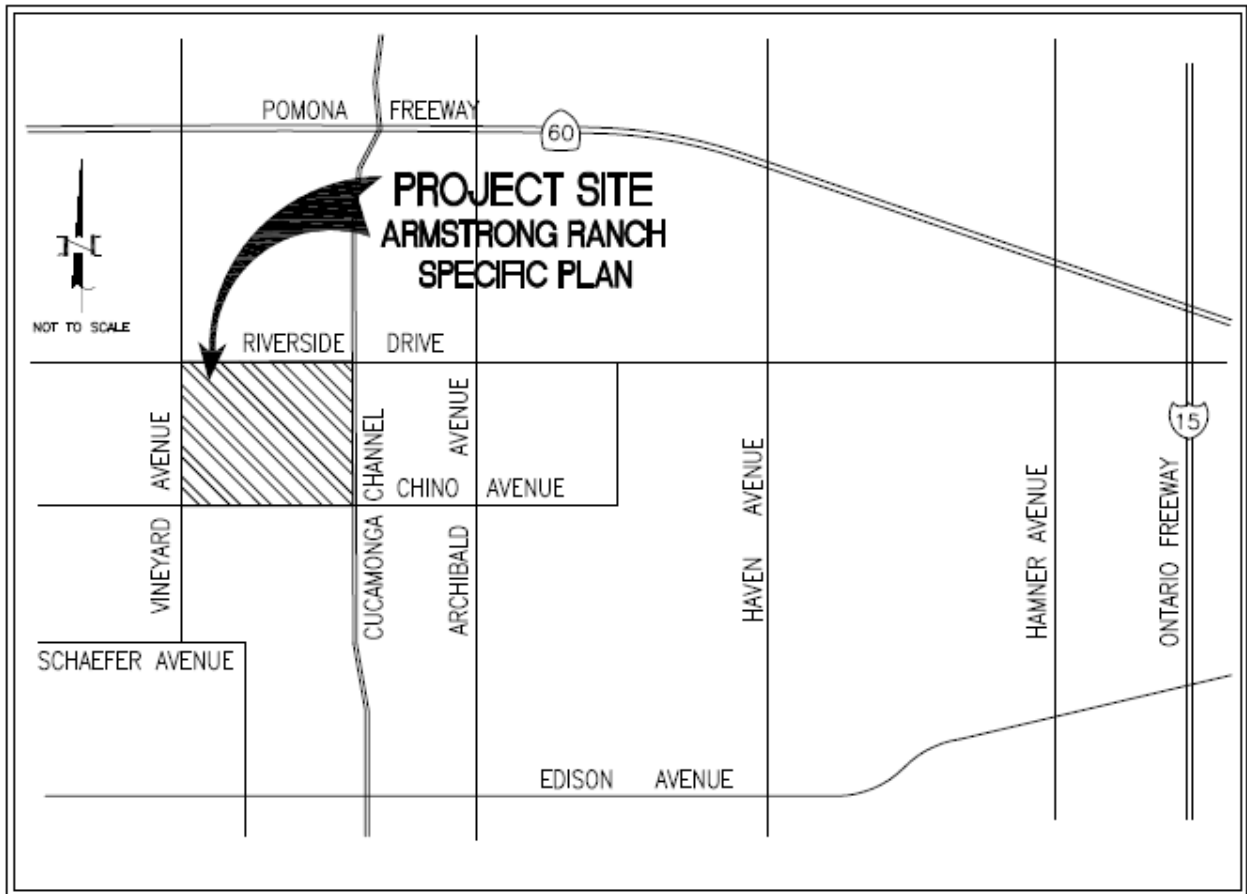

## B. Existing Condition Rational Method Hydrology Calculations

\*\*\*\*\*  
\*

RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE  
(Reference: 1986 SAN BERNARDINO CO. HYDROLOGY CRITERION)  
(c) Copyright 1983-2003 Advanced Engineering Software (aes)  
Ver. 8.0 Release Date: 01/01/2003 License ID 1269

Analysis prepared by:

MDS Consulting  
17320 Redhill Avenue, Suite 350  
Irvine, CA 92614  
949-721-8821

\*\*\*\*\* DESCRIPTION OF STUDY  
\*\*\*\*\*

\* Existing Condition Hydrology Calculation  
\*  
\* 10-year storm  
\*  
\*  
\*

\*\*\*\*\*

FILE NAME: EXIST.DAT  
TIME/DATE OF STUDY: 14:02 11/04/2015

=====

=

USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:

=====

=

--\*TIME-OF-CONCENTRATION MODEL\*--

USER SPECIFIED STORM EVENT(YEAR) = 10.00  
SPECIFIED MINIMUM PIPE SIZE(INCH) = 18.00  
SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95  
\*USER-DEFINED LOGARITHMIC INTERPOLATION USED FOR RAINFALL\*

SLOPE OF INTENSITY DURATION CURVE(LOG(I;IN/HR) vs. LOG(Tc;MIN)) = 0.6000  
USER SPECIFIED 1-HOUR INTENSITY(INCH/HOUR) = 0.9060

\*ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD\*

\*USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL\*  
HALF- CROWN TO STREET-CROSSFALL: CURB GUTTER-GEOMETRIES:

MANNING	WIDTH	CROSSFALL	IN-	/	OUT-/PARK-	HEIGHT	WIDTH	LIP	HIKE	
FACTOR	(FT)	(FT)	SIDE	/	SIDE/ WAY	(FT)	(FT)	(FT)	(FT)	(n)
NO.	=====	=====	=====	=====	=====	=====	=====	=====	=====	
1	30.0	20.0	0.018/0.018/0.020			0.67	2.00	0.0313	0.167	



0.0150

GLOBAL STREET FLOW-DEPTH CONSTRAINTS:

- 1. Relative Flow-Depth = 0.00 FEET  
as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
- 2. (Depth)\*(Velocity) Constraint = 6.0 (FT\*FT/S)

\*SIZE PIPE WITH A FLOW CAPACITY GREATER THAN  
OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.\*  
\*USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 1.00 TO NODE 2.00 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 800.00  
ELEVATION DATA: UPSTREAM(FEET) = 774.00 DOWNSTREAM(FEET) = 762.00

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 17.627  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.889

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
NATURAL POOR COVER "BARREN"	A	1.70	0.42	1.00	78	17.63
NATURAL POOR COVER "BARREN"	C	2.20	0.18	1.00	91	17.63

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.28  
SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 1.00  
SUBAREA RUNOFF(CFS) = 5.64  
TOTAL AREA(ACRES) = 3.90 PEAK FLOW RATE(CFS) = 5.64

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 2.00 TO NODE 5.00 IS CODE = 52

-----  
-  
>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=  
ELEVATION DATA: UPSTREAM(FEET) = 762.00 DOWNSTREAM(FEET) = 748.40  
CHANNEL LENGTH THRU SUBAREA(FEET) = 2250.00 CHANNEL SLOPE = 0.0060  
CHANNEL FLOW THRU SUBAREA(CFS) = 5.64  
FLOW VELOCITY(FEET/SEC) = 1.69 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
TRAVEL TIME(MIN.) = 22.22  $T_c$ (MIN.) = 39.85  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 5.00 = 3050.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 5.00 TO NODE 5.00 IS CODE = 81

-----  
-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====

=

MAINLINE Tc(MIN) = 39.85  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.158  
 SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
NATURAL POOR COVER "BARREN"	A	22.30	0.42	1.00	78
NATURAL POOR COVER "BARREN"	C	41.80	0.18	1.00	91

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.26  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
 SUBAREA AREA(ACRES) = 64.10 SUBAREA RUNOFF(CFS) = 51.69  
 EFFECTIVE AREA(ACRES) = 68.00 AREA-AVERAGED Fm(INCH/HR) = 0.26  
 AREA-AVERAGED Fp(INCH/HR) = 0.26 AREA-AVERAGED Ap = 1.00  
 TOTAL AREA(ACRES) = 68.00 PEAK FLOW RATE(CFS) = 54.77

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 10.00 TO NODE 13.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 1000.00  
 ELEVATION DATA: UPSTREAM(FEET) = 774.00 DOWNSTREAM(FEET) = 761.00

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 19.832  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.760  
 SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc
NATURAL POOR COVER "BARREN"	A	6.40	0.42	1.00	78	19.83

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.42  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
 SUBAREA RUNOFF(CFS) = 7.74  
 TOTAL AREA(ACRES) = 6.40 PEAK FLOW RATE(CFS) = 7.74

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 13.00 TO NODE 19.00 IS CODE = 52

-----  
-  
>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 761.00 DOWNSTREAM(FEET) = 751.00  
CHANNEL LENGTH THRU SUBAREA(FEET) = 1950.00 CHANNEL SLOPE = 0.0051  
CHANNEL FLOW THRU SUBAREA(CFS) = 7.74  
FLOW VELOCITY(FEET/SEC) = 1.68 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
TRAVEL TIME(MIN.) = 19.36 Tc(MIN.) = 39.19  
LONGEST FLOWPATH FROM NODE 10.00 TO NODE 19.00 = 2950.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 19.00 TO NODE 19.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 39.19  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.170  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
NATURAL POOR COVER  
"BARREN" A 26.30 0.42 1.00 78  
NATURAL POOR COVER  
"BARREN" C 7.10 0.18 1.00 91  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.37  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
SUBAREA AREA(ACRES) = 33.40 SUBAREA RUNOFF(CFS) = 24.17  
EFFECTIVE AREA(ACRES) = 39.80 AREA-AVERAGED Fm(INCH/HR) = 0.37  
AREA-AVERAGED Fp(INCH/HR) = 0.37 AREA-AVERAGED Ap = 1.00  
TOTAL AREA(ACRES) = 39.80 PEAK FLOW RATE(CFS) = 28.51

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 19.00 TO NODE 19.00 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 39.19  
RAINFALL INTENSITY(INCH/HR) = 1.17  
AREA-AVERAGED Fm(INCH/HR) = 0.37  
AREA-AVERAGED Fp(INCH/HR) = 0.37  
AREA-AVERAGED Ap = 1.00  
EFFECTIVE STREAM AREA(ACRES) = 39.80  
TOTAL STREAM AREA(ACRES) = 39.80  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 28.51

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 15.00 TO NODE 17.00 IS CODE = 21

-----

-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 900.00
ELEVATION DATA: UPSTREAM(FEET) = 779.50 DOWNSTREAM(FEET) = 765.00

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 18.215
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.853

SUBAREA Tc AND LOSS RATE DATA(AMC II):

Table with 8 columns: DEVELOPMENT TYPE/LAND USE, SCS SOIL GROUP, AREA (ACRES), Fp (INCH/HR), Ap (DECIMAL), SCS CN, Tc (MIN.). Row 1: NATURAL POOR COVER "BARREN", A, 5.20, 0.42, 1.00, 78, 18.22

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.42
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00
SUBAREA RUNOFF(CFS) = 6.72
TOTAL AREA(ACRES) = 5.20 PEAK FLOW RATE(CFS) = 6.72

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 17.00 TO NODE 19.00 IS CODE = 52

-----

-

>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 765.00 DOWNSTREAM(FEET) = 751.00
CHANNEL LENGTH THRU SUBAREA(FEET) = 2350.00 CHANNEL SLOPE = 0.0060
CHANNEL FLOW THRU SUBAREA(CFS) = 6.72
FLOW VELOCITY(FEET/SEC) = 1.75 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)
TRAVEL TIME(MIN.) = 22.41 Tc(MIN.) = 40.62
LONGEST FLOWPATH FROM NODE 15.00 TO NODE 19.00 = 3250.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 19.00 TO NODE 19.00 IS CODE = 81

-----

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 40.62

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.145  
 SUBAREA LOSS RATE DATA(AMC II):  
 DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
 LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
 NATURAL POOR COVER  
 "BARREN" A 34.20 0.42 1.00 78  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.42  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
 SUBAREA AREA(ACRES) = 34.20 SUBAREA RUNOFF(CFS) = 22.43  
 EFFECTIVE AREA(ACRES) = 39.40 AREA-AVERAGED Fm(INCH/HR) = 0.42  
 AREA-AVERAGED Fp(INCH/HR) = 0.42 AREA-AVERAGED Ap = 1.00  
 TOTAL AREA(ACRES) = 39.40 PEAK FLOW RATE(CFS) = 25.85

\*\*\*\*\*  
 \*

FLOW PROCESS FROM NODE 19.00 TO NODE 19.00 IS CODE = 1

-----  
 -  
 >>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
 =

TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 40.62  
 RAINFALL INTENSITY(INCH/HR) = 1.14  
 AREA-AVERAGED Fm(INCH/HR) = 0.42  
 AREA-AVERAGED Fp(INCH/HR) = 0.42  
 AREA-AVERAGED Ap = 1.00  
 EFFECTIVE STREAM AREA(ACRES) = 39.40  
 TOTAL STREAM AREA(ACRES) = 39.40  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 25.85

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	28.51	39.19	1.170	0.37( 0.37)	1.00	39.8	10.00
2	25.85	40.62	1.145	0.42( 0.42)	1.00	39.4	15.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	54.30	39.19	1.170	0.39( 0.39)	1.00	77.8	10.00
2	53.46	40.62	1.145	0.39( 0.39)	1.00	79.2	15.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 54.30 Tc(MIN.) = 39.19  
 EFFECTIVE AREA(ACRES) = 77.81 AREA-AVERAGED Fm(INCH/HR) = 0.39  
 AREA-AVERAGED Fp(INCH/HR) = 0.39 AREA-AVERAGED Ap = 1.00  
 TOTAL AREA(ACRES) = 79.20  
 LONGEST FLOWPATH FROM NODE 15.00 TO NODE 19.00 = 3250.00 FEET.

\*\*\*\*\*  
 \*

FLOW PROCESS FROM NODE 20.00 TO NODE 22.00 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 850.00  
ELEVATION DATA: UPSTREAM(FEET) = 783.20 DOWNSTREAM(FEET) = 772.70

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$

SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 18.775

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.819

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
-------------------------------	-------------------	-----------------	--------------------	--------------------	-----------	-----------------

NATURAL POOR COVER

"BARREN" A 5.00 0.42 1.00 78

18.77

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.42

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 1.00

SUBAREA RUNOFF(CFS) = 6.31

TOTAL AREA(ACRES) = 5.00 PEAK FLOW RATE(CFS) = 6.31

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 22.00 TO NODE 22.00 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 18.77  
RAINFALL INTENSITY(INCH/HR) = 1.82  
AREA-AVERAGED  $F_m$ (INCH/HR) = 0.42  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.42  
AREA-AVERAGED  $A_p$  = 1.00  
EFFECTIVE STREAM AREA(ACRES) = 5.00  
TOTAL STREAM AREA(ACRES) = 5.00  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 6.31

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 21.00 TO NODE 22.00 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 850.00  
ELEVATION DATA: UPSTREAM(FEET) = 779.50 DOWNSTREAM(FEET) = 772.70

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 20.479  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.727  
 SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
NATURAL POOR COVER "BARREN"	C	4.80	0.18	1.00	91	20.48

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.18  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
 SUBAREA RUNOFF(CFS) = 6.68  
 TOTAL AREA(ACRES) = 4.80 PEAK FLOW RATE(CFS) = 6.68

\*\*\*\*\*

FLOW PROCESS FROM NODE 22.00 TO NODE 22.00 IS CODE = 1

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====

TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 20.48  
 RAINFALL INTENSITY(INCH/HR) = 1.73  
 AREA-AVERAGED Fm(INCH/HR) = 0.18  
 AREA-AVERAGED Fp(INCH/HR) = 0.18  
 AREA-AVERAGED Ap = 1.00  
 EFFECTIVE STREAM AREA(ACRES) = 4.80  
 TOTAL STREAM AREA(ACRES) = 4.80  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 6.68

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	6.31	18.77	1.819	0.42( 0.42)	1.00	5.0	20.00
2	6.68	20.48	1.727	0.18( 0.18)	1.00	4.8	21.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	12.81	18.77	1.819	0.31( 0.31)	1.00	9.4	20.00
2	12.58	20.48	1.727	0.30( 0.30)	1.00	9.8	21.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 12.81 Tc(MIN.) = 18.77  
 EFFECTIVE AREA(ACRES) = 9.40 AREA-AVERAGED Fm(INCH/HR) = 0.31  
 AREA-AVERAGED Fp(INCH/HR) = 0.31 AREA-AVERAGED Ap = 1.00  
 TOTAL AREA(ACRES) = 9.80  
 LONGEST FLOWPATH FROM NODE 20.00 TO NODE 22.00 = 850.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 22.00 TO NODE 25.00 IS CODE = 52

-----  
-

>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 772.70 DOWNSTREAM(FEET) = 754.50  
CHANNEL LENGTH THRU SUBAREA(FEET) = 1800.00 CHANNEL SLOPE = 0.0101  
CHANNEL FLOW THRU SUBAREA(CFS) = 12.81  
FLOW VELOCITY(FEET/SEC) = 2.68 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
TRAVEL TIME(MIN.) = 11.20 Tc(MIN.) = 29.98  
LONGEST FLOWPATH FROM NODE 20.00 TO NODE 25.00 = 2650.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 25.00 TO NODE 25.00 IS CODE = 81

-----  
-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 29.98  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.374  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
NATURAL POOR COVER  
"BARREN" A 26.70 0.42 1.00 78  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.42  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
SUBAREA AREA(ACRES) = 26.70 SUBAREA RUNOFF(CFS) = 23.02  
EFFECTIVE AREA(ACRES) = 36.10 AREA-AVERAGED Fm(INCH/HR) = 0.39  
AREA-AVERAGED Fp(INCH/HR) = 0.39 AREA-AVERAGED Ap = 1.00  
TOTAL AREA(ACRES) = 36.50 PEAK FLOW RATE(CFS) = 32.06

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 30.00 TO NODE 32.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 1000.00  
ELEVATION DATA: UPSTREAM(FEET) = 774.00 DOWNSTREAM(FEET) = 765.00  
  
Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 12.360  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.338  
SUBAREA Tc AND LOSS RATE DATA(AMC II):



DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
COMMERCIAL	A	0.30	0.98	0.10	32	12.36
NATURAL POOR COVER "BARREN"	A	0.20	0.42	1.00	78	21.35

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.49  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.46  
 SUBAREA RUNOFF(CFS) = 0.95  
 TOTAL AREA(ACRES) = 0.50 PEAK FLOW RATE(CFS) = 0.95

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 32.00 TO NODE 34.00 IS CODE = 52

-----  
-  
>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 765.00 DOWNSTREAM(FEET) = 755.00  
 CHANNEL LENGTH THRU SUBAREA(FEET) = 1100.00 CHANNEL SLOPE = 0.0091  
 NOTE: CHANNEL FLOW OF 1. CFS WAS ASSUMED IN VELOCITY ESTIMATION  
 CHANNEL FLOW THRU SUBAREA(CFS) = 0.95  
 FLOW VELOCITY(FEET/SEC) = 1.43 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
 TRAVEL TIME(MIN.) = 12.82 Tc(MIN.) = 25.18  
 LONGEST FLOWPATH FROM NODE 30.00 TO NODE 34.00 = 2100.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 34.00 TO NODE 34.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 25.18  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.525  
 SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
COMMERCIAL	A	0.40	0.98	0.10	32
NATURAL POOR COVER "BARREN"	A	0.60	0.42	1.00	78

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.45  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.64  
 SUBAREA AREA(ACRES) = 1.00 SUBAREA RUNOFF(CFS) = 1.11  
 EFFECTIVE AREA(ACRES) = 1.50 AREA-AVERAGED Fm(INCH/HR) = 0.27  
 AREA-AVERAGED Fp(INCH/HR) = 0.46 AREA-AVERAGED Ap = 0.58  
 TOTAL AREA(ACRES) = 1.50 PEAK FLOW RATE(CFS) = 1.70

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 34.00 TO NODE 36.00 IS CODE = 52

>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

ELEVATION DATA: UPSTREAM(FEET) = 755.00 DOWNSTREAM(FEET) = 749.40  
CHANNEL LENGTH THRU SUBAREA(FEET) = 1400.00 CHANNEL SLOPE = 0.0040  
CHANNEL FLOW THRU SUBAREA(CFS) = 1.70  
FLOW VELOCITY(FEET/SEC) = 1.05 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
TRAVEL TIME(MIN.) = 22.17 Tc(MIN.) = 47.35  
LONGEST FLOWPATH FROM NODE 30.00 TO NODE 36.00 = 3500.00 FEET.

\*\*\*\*\*  
\* FLOW PROCESS FROM NODE 36.00 TO NODE 36.00 IS CODE = 81

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

MAINLINE Tc(MIN) = 47.35  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.044  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 0.50 0.98 0.10 32  
NATURAL POOR COVER  
"BARREN" A 3.50 0.42 1.00 78  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.42  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.89  
SUBAREA AREA(ACRES) = 4.00 SUBAREA RUNOFF(CFS) = 2.41  
EFFECTIVE AREA(ACRES) = 5.50 AREA-AVERAGED Fm(INCH/HR) = 0.35  
AREA-AVERAGED Fp(INCH/HR) = 0.43 AREA-AVERAGED Ap = 0.80  
TOTAL AREA(ACRES) = 5.50 PEAK FLOW RATE(CFS) = 3.45

\*\*\*\*\*  
\* FLOW PROCESS FROM NODE 36.00 TO NODE 49.00 IS CODE = 52

>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

ELEVATION DATA: UPSTREAM(FEET) = 749.40 DOWNSTREAM(FEET) = 746.10  
CHANNEL LENGTH THRU SUBAREA(FEET) = 1200.00 CHANNEL SLOPE = 0.0028  
CHANNEL FLOW THRU SUBAREA(CFS) = 3.45  
FLOW VELOCITY(FEET/SEC) = 1.02 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
TRAVEL TIME(MIN.) = 19.68 Tc(MIN.) = 67.03  
LONGEST FLOWPATH FROM NODE 30.00 TO NODE 49.00 = 4700.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 49.00 TO NODE 49.00 IS CODE = 81

-----

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====

=

MAINLINE Tc(MIN) = 67.03  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 0.848  
 SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
COMMERCIAL	A	0.36	0.98	0.10	32
NATURAL POOR COVER "BARREN"	A	3.64	0.42	1.00	78

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.42  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.92  
 SUBAREA AREA(ACRES) = 4.00 SUBAREA RUNOFF(CFS) = 1.66  
 EFFECTIVE AREA(ACRES) = 9.50 AREA-AVERAGED Fm(INCH/HR) = 0.36  
 AREA-AVERAGED Fp(INCH/HR) = 0.43 AREA-AVERAGED Ap = 0.85  
 TOTAL AREA(ACRES) = 9.50 PEAK FLOW RATE(CFS) = 4.14

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 49.00 TO NODE 49.00 IS CODE = 1

-----

-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
 TIME OF CONCENTRATION(MIN.) = 67.03  
 RAINFALL INTENSITY(INCH/HR) = 0.85  
 AREA-AVERAGED Fm(INCH/HR) = 0.36  
 AREA-AVERAGED Fp(INCH/HR) = 0.43  
 AREA-AVERAGED Ap = 0.85  
 EFFECTIVE STREAM AREA(ACRES) = 9.50  
 TOTAL STREAM AREA(ACRES) = 9.50  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 4.14

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 40.00 TO NODE 42.00 IS CODE = 21

-----

-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 740.00  
 ELEVATION DATA: UPSTREAM(FEET) = 773.50 DOWNSTREAM(FEET) = 761.00

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20

SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.685

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.953

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
-------------------------------	-------------------	-----------------	-----------------	-----------------	-----------	--------------

NATURAL POOR COVER

"BARREN" A 1.60 0.42 1.00 78

16.68

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.42

SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00

SUBAREA RUNOFF(CFS) = 2.21

TOTAL AREA(ACRES) = 1.60 PEAK FLOW RATE(CFS) = 2.21

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 42.00 TO NODE 49.00 IS CODE = 52

>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 761.00 DOWNSTREAM(FEET) = 746.10  
 CHANNEL LENGTH THRU SUBAREA(FEET) = 1930.00 CHANNEL SLOPE = 0.0077  
 CHANNEL FLOW THRU SUBAREA(CFS) = 2.21  
 FLOW VELOCITY(FEET/SEC) = 1.54 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
 TRAVEL TIME(MIN.) = 20.82 Tc(MIN.) = 37.51  
 LONGEST FLOWPATH FROM NODE 40.00 TO NODE 49.00 = 2670.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 49.00 TO NODE 49.00 IS CODE = 81

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 37.51  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.201  
 SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
NATURAL POOR COVER "BARREN"	A	0.50	0.42	1.00	78
NATURAL POOR COVER "BARREN"	C	1.80	0.18	1.00	91

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.23  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
 SUBAREA AREA(ACRES) = 2.30 SUBAREA RUNOFF(CFS) = 2.01  
 EFFECTIVE AREA(ACRES) = 3.90 AREA-AVERAGED Fm(INCH/HR) = 0.31  
 AREA-AVERAGED Fp(INCH/HR) = 0.31 AREA-AVERAGED Ap = 1.00  
 TOTAL AREA(ACRES) = 3.90 PEAK FLOW RATE(CFS) = 3.14

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 49.00 TO NODE 49.00 IS CODE = 1

-----  
-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 37.51  
RAINFALL INTENSITY(INCH/HR) = 1.20  
AREA-AVERAGED Fm(INCH/HR) = 0.31  
AREA-AVERAGED Fp(INCH/HR) = 0.31  
AREA-AVERAGED Ap = 1.00  
EFFECTIVE STREAM AREA(ACRES) = 3.90  
TOTAL STREAM AREA(ACRES) = 3.90  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 3.14

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	4.14	67.03	0.848	0.43( 0.36)	0.85	9.5	30.00
2	3.14	37.51	1.201	0.31( 0.31)	1.00	3.9	40.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	7.14	37.51	1.201	0.37( 0.34)	0.91	9.2	40.00
2	6.04	67.03	0.848	0.39( 0.35)	0.90	13.4	30.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 7.14 Tc(MIN.) = 37.51  
EFFECTIVE AREA(ACRES) = 9.22 AREA-AVERAGED Fm(INCH/HR) = 0.34  
AREA-AVERAGED Fp(INCH/HR) = 0.37 AREA-AVERAGED Ap = 0.91  
TOTAL AREA(ACRES) = 13.40  
LONGEST FLOWPATH FROM NODE 30.00 TO NODE 49.00 = 4700.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 50.00 TO NODE 53.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 432.00  
ELEVATION DATA: UPSTREAM(FEET) = 773.50 DOWNSTREAM(FEET) = 770.00

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 9.023  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.824

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
COMMERCIAL	A	0.12	0.98	0.10	32	9.02
NATURAL POOR COVER "BARREN"	A	0.07	0.42	1.00	78	15.58
COMMERCIAL	C	0.06	0.57	0.10	69	9.02
NATURAL POOR COVER "BARREN"	C	0.05	0.18	1.00	91	15.58

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.39  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.46  
SUBAREA RUNOFF(CFS) = 0.71  
TOTAL AREA(ACRES) = 0.30 PEAK FLOW RATE(CFS) = 0.71

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 53.00 TO NODE 53.00 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 9.02  
RAINFALL INTENSITY(INCH/HR) = 2.82  
AREA-AVERAGED Fm(INCH/HR) = 0.18  
AREA-AVERAGED Fp(INCH/HR) = 0.39  
AREA-AVERAGED Ap = 0.46  
EFFECTIVE STREAM AREA(ACRES) = 0.30  
TOTAL STREAM AREA(ACRES) = 0.30  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 0.71

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 51.00 TO NODE 53.00 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 740.00  
ELEVATION DATA: UPSTREAM(FEET) = 774.00 DOWNSTREAM(FEET) = 770.00

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 12.134  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.364

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc
-------------------------------	-------------------	-----------------	-----------------	-----------------	-----------	----

(MIN.)

12.13	COMMERCIAL	A	0.32	0.98	0.10	32
12.13	COMMERCIAL	C	0.22	0.57	0.10	69
20.95	NATURAL POOR COVER "BARREN"	A	0.16	0.42	1.00	78
20.95	NATURAL POOR COVER "BARREN"	C	0.12	0.18	1.00	91

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.39  
SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.41  
SUBAREA RUNOFF(CFS) = 1.63  
TOTAL AREA(ACRES) = 0.82 PEAK FLOW RATE(CFS) = 1.63

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 53.00 TO NODE 53.00 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 12.13  
RAINFALL INTENSITY(INCH/HR) = 2.36  
AREA-AVERAGED  $F_m$ (INCH/HR) = 0.16  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.39  
AREA-AVERAGED  $A_p$  = 0.41  
EFFECTIVE STREAM AREA(ACRES) = 0.82  
TOTAL STREAM AREA(ACRES) = 0.82  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 1.63

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	0.71	9.02	2.824	0.39( 0.18)	0.46	0.3	50.00
2	1.63	12.13	2.364	0.39( 0.16)	0.41	0.8	51.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	2.18	9.02	2.824	0.39( 0.17)	0.42	0.9	50.00
2	2.22	12.13	2.364	0.39( 0.17)	0.42	1.1	51.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 2.22 Tc(MIN.) = 12.13  
EFFECTIVE AREA(ACRES) = 1.12 AREA-AVERAGED  $F_m$ (INCH/HR) = 0.17  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.39 AREA-AVERAGED  $A_p$  = 0.42  
TOTAL AREA(ACRES) = 1.12  
LONGEST FLOWPATH FROM NODE 51.00 TO NODE 53.00 = 740.00 FEET.

=====

=

END OF STUDY SUMMARY:

TOTAL AREA(ACRES) = 1.12 TC(MIN.) = 12.13  
EFFECTIVE AREA(ACRES) = 1.12 AREA-AVERAGED Fm(INCH/HR)= 0.17  
AREA-AVERAGED Fp(INCH/HR) = 0.39 AREA-AVERAGED Ap = 0.42  
PEAK FLOW RATE(CFS) = 2.22

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	2.18	9.02	2.824	0.39( 0.17)	0.42	0.9	50.00
2	2.22	12.13	2.364	0.39( 0.17)	0.42	1.1	51.00

=====

=

=====

=

END OF RATIONAL METHOD ANALYSIS





\*\*\*\*\*  
\*

RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE  
(Reference: 1986 SAN BERNARDINO CO. HYDROLOGY CRITERION)  
(c) Copyright 1983-2003 Advanced Engineering Software (aes)  
Ver. 8.0 Release Date: 01/01/2003 License ID 1269

Analysis prepared by:

MDS Consulting  
17320 Redhill Avenue, Suite 350  
Irvine, CA 92614  
949-721-8821

\*\*\*\*\* DESCRIPTION OF STUDY  
\*\*\*\*\*

\* Existing Condition Hydrology Calculation  
\*  
\* 100-year storm  
\*  
\*  
\*

\*\*\*\*\*

FILE NAME: EXIST.DAT  
TIME/DATE OF STUDY: 13:55 11/04/2015

=====

USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:

=====

--\*TIME-OF-CONCENTRATION MODEL\*--

USER SPECIFIED STORM EVENT(YEAR) = 100.00  
SPECIFIED MINIMUM PIPE SIZE(INCH) = 18.00  
SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95  
\*USER-DEFINED LOGARITHMIC INTERPOLATION USED FOR RAINFALL\*

SLOPE OF INTENSITY DURATION CURVE(LOG(I;IN/HR) vs. LOG(Tc;MIN)) = 0.6000  
USER SPECIFIED 1-HOUR INTENSITY(INCH/HOUR) = 1.3700

\*ANTECEDENT MOISTURE CONDITION (AMC) III ASSUMED FOR RATIONAL METHOD\*

\*USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL\*  
HALF- CROWN TO STREET-CROSSFALL: CURB GUTTER-GEOMETRIES:

MANNING	WIDTH	CROSSFALL	IN-	OUT-/PARK-	HEIGHT	WIDTH	LIP	HIKE	
FACTOR	(FT)	(FT)	SIDE	SIDE/ WAY	(FT)	(FT)	(FT)	(FT)	(n)
NO.	====	====	=====	=====	=====	=====	=====	=====	
1	30.0	20.0	0.018/0.018/0.020		0.67	2.00	0.0313	0.167	

0.0150

GLOBAL STREET FLOW-DEPTH CONSTRAINTS:

- 1. Relative Flow-Depth = 0.00 FEET  
as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
- 2. (Depth)\*(Velocity) Constraint = 6.0 (FT\*FT/S)

\*SIZE PIPE WITH A FLOW CAPACITY GREATER THAN  
OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.\*  
\*USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 1.00 TO NODE 2.00 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 800.00  
ELEVATION DATA: UPSTREAM(FEET) = 774.00 DOWNSTREAM(FEET) = 762.00

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 17.627  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.857

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
NATURAL POOR COVER "BARREN"	A	1.70	0.14	1.00	93	17.63
NATURAL POOR COVER "BARREN"	C	2.20	0.00	1.00	98	17.63

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.06  
SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 1.00  
SUBAREA RUNOFF(CFS) = 9.81  
TOTAL AREA(ACRES) = 3.90 PEAK FLOW RATE(CFS) = 9.81

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 2.00 TO NODE 5.00 IS CODE = 52

-----  
-  
>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=  
ELEVATION DATA: UPSTREAM(FEET) = 762.00 DOWNSTREAM(FEET) = 748.40  
CHANNEL LENGTH THRU SUBAREA(FEET) = 2250.00 CHANNEL SLOPE = 0.0060  
CHANNEL FLOW THRU SUBAREA(CFS) = 9.81  
FLOW VELOCITY(FEET/SEC) = 1.93 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
TRAVEL TIME(MIN.) = 19.39  $T_c$ (MIN.) = 37.02  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 5.00 = 3050.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 5.00 TO NODE 5.00 IS CODE = 81

-----

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====

=

MAINLINE Tc(MIN) = 37.02  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 1.830  
 SUBAREA LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
NATURAL POOR COVER "BARREN"	A	22.30	0.14	1.00	93
NATURAL POOR COVER "BARREN"	C	41.80	0.00	1.00	98

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.05  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
 SUBAREA AREA(ACRES) = 64.10 SUBAREA RUNOFF(CFS) = 102.79  
 EFFECTIVE AREA(ACRES) = 68.00 AREA-AVERAGED Fm(INCH/HR) = 0.05  
 AREA-AVERAGED Fp(INCH/HR) = 0.05 AREA-AVERAGED Ap = 1.00  
 TOTAL AREA(ACRES) = 68.00 PEAK FLOW RATE(CFS) = 109.00

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 10.00 TO NODE 13.00 IS CODE = 21

-----

-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 1000.00  
 ELEVATION DATA: UPSTREAM(FEET) = 774.00 DOWNSTREAM(FEET) = 761.00

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 19.832  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.662  
 SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc
NATURAL POOR COVER "BARREN"	A	6.40	0.14	1.00	93	19.83

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.14  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
 SUBAREA RUNOFF(CFS) = 14.53  
 TOTAL AREA(ACRES) = 6.40 PEAK FLOW RATE(CFS) = 14.53

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 13.00 TO NODE 19.00 IS CODE = 52

-----  
-  
>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 761.00 DOWNSTREAM(FEET) = 751.00  
CHANNEL LENGTH THRU SUBAREA(FEET) = 1950.00 CHANNEL SLOPE = 0.0051  
CHANNEL FLOW THRU SUBAREA(CFS) = 14.53  
FLOW VELOCITY(FEET/SEC) = 1.97 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
TRAVEL TIME(MIN.) = 16.49 Tc(MIN.) = 36.32  
LONGEST FLOWPATH FROM NODE 10.00 TO NODE 19.00 = 2950.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 19.00 TO NODE 19.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 36.32  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 1.851  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
NATURAL POOR COVER  
"BARREN" A 26.30 0.14 1.00 93  
NATURAL POOR COVER  
"BARREN" C 7.10 0.00 1.00 98  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.11  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
SUBAREA AREA(ACRES) = 33.40 SUBAREA RUNOFF(CFS) = 52.34  
EFFECTIVE AREA(ACRES) = 39.80 AREA-AVERAGED Fm(INCH/HR) = 0.12  
AREA-AVERAGED Fp(INCH/HR) = 0.12 AREA-AVERAGED Ap = 1.00  
TOTAL AREA(ACRES) = 39.80 PEAK FLOW RATE(CFS) = 62.20

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 19.00 TO NODE 19.00 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 36.32  
RAINFALL INTENSITY(INCH/HR) = 1.85  
AREA-AVERAGED Fm(INCH/HR) = 0.12  
AREA-AVERAGED Fp(INCH/HR) = 0.12  
AREA-AVERAGED Ap = 1.00  
EFFECTIVE STREAM AREA(ACRES) = 39.80  
TOTAL STREAM AREA(ACRES) = 39.80  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 62.20

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 15.00 TO NODE 17.00 IS CODE = 21

-----

-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 900.00
ELEVATION DATA: UPSTREAM(FEET) = 779.50 DOWNSTREAM(FEET) = 765.00

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 18.215
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.801

SUBAREA Tc AND LOSS RATE DATA(AMC III):

Table with 7 columns: DEVELOPMENT TYPE/LAND USE, SCS SOIL GROUP, AREA (ACRES), Fp (INCH/HR), Ap (DECIMAL), SCS CN, Tc (MIN.). Row 1: NATURAL POOR COVER "BARREN", A, 5.20, 0.14, 1.00, 93, 18.22

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.14
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00
SUBAREA RUNOFF(CFS) = 12.45
TOTAL AREA(ACRES) = 5.20 PEAK FLOW RATE(CFS) = 12.45

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 17.00 TO NODE 19.00 IS CODE = 52

-----

-

>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 765.00 DOWNSTREAM(FEET) = 751.00
CHANNEL LENGTH THRU SUBAREA(FEET) = 2350.00 CHANNEL SLOPE = 0.0060
CHANNEL FLOW THRU SUBAREA(CFS) = 12.45
FLOW VELOCITY(FEET/SEC) = 2.04 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)
TRAVEL TIME(MIN.) = 19.19 Tc(MIN.) = 37.41
LONGEST FLOWPATH FROM NODE 15.00 TO NODE 19.00 = 3250.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 19.00 TO NODE 19.00 IS CODE = 81

-----

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 37.41

\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 1.819  
 SUBAREA LOSS RATE DATA(AMC III):  
 DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
 LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
 NATURAL POOR COVER  
 "BARREN" A 34.20 0.14 1.00 93  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.14  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
 SUBAREA AREA(ACRES) = 34.20 SUBAREA RUNOFF(CFS) = 51.68  
 EFFECTIVE AREA(ACRES) = 39.40 AREA-AVERAGED Fm(INCH/HR) = 0.14  
 AREA-AVERAGED Fp(INCH/HR) = 0.14 AREA-AVERAGED Ap = 1.00  
 TOTAL AREA(ACRES) = 39.40 PEAK FLOW RATE(CFS) = 59.54

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 19.00 TO NODE 19.00 IS CODE = 1

-----  
 >>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=

TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 37.41  
 RAINFALL INTENSITY(INCH/HR) = 1.82  
 AREA-AVERAGED Fm(INCH/HR) = 0.14  
 AREA-AVERAGED Fp(INCH/HR) = 0.14  
 AREA-AVERAGED Ap = 1.00  
 EFFECTIVE STREAM AREA(ACRES) = 39.40  
 TOTAL STREAM AREA(ACRES) = 39.40  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 59.54

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	62.20	36.32	1.851	0.12( 0.12)	1.00	39.8	10.00
2	59.54	37.41	1.819	0.14( 0.14)	1.00	39.4	15.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	121.12	36.32	1.851	0.13( 0.13)	1.00	78.1	10.00
2	120.57	37.41	1.819	0.13( 0.13)	1.00	79.2	15.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 121.12 Tc(MIN.) = 36.32  
 EFFECTIVE AREA(ACRES) = 78.06 AREA-AVERAGED Fm(INCH/HR) = 0.13  
 AREA-AVERAGED Fp(INCH/HR) = 0.13 AREA-AVERAGED Ap = 1.00  
 TOTAL AREA(ACRES) = 79.20  
 LONGEST FLOWPATH FROM NODE 15.00 TO NODE 19.00 = 3250.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 20.00 TO NODE 22.00 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 850.00  
ELEVATION DATA: UPSTREAM(FEET) = 783.20 DOWNSTREAM(FEET) = 772.70

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 18.775  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.751

SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
NATURAL POOR COVER "BARREN"	A	5.00	0.14	1.00	93	18.77

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.14

SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00

SUBAREA RUNOFF(CFS) = 11.75

TOTAL AREA(ACRES) = 5.00 PEAK FLOW RATE(CFS) = 11.75

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 22.00 TO NODE 22.00 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 18.77  
RAINFALL INTENSITY(INCH/HR) = 2.75  
AREA-AVERAGED Fm(INCH/HR) = 0.14  
AREA-AVERAGED Fp(INCH/HR) = 0.14  
AREA-AVERAGED Ap = 1.00  
EFFECTIVE STREAM AREA(ACRES) = 5.00  
TOTAL STREAM AREA(ACRES) = 5.00  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 11.75

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 21.00 TO NODE 22.00 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 850.00  
ELEVATION DATA: UPSTREAM(FEET) = 779.50 DOWNSTREAM(FEET) = 772.70



Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 20.479  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.611  
 SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
NATURAL POOR COVER "BARREN"	C	4.80	0.00	1.00	98	20.48

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.00  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00  
 SUBAREA RUNOFF(CFS) = 11.28  
 TOTAL AREA(ACRES) = 4.80 PEAK FLOW RATE(CFS) = 11.28

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 22.00 TO NODE 22.00 IS CODE = 1

-----  
 -  
 >>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
 =  
 TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 20.48  
 RAINFALL INTENSITY(INCH/HR) = 2.61  
 AREA-AVERAGED Fm(INCH/HR) = 0.00  
 AREA-AVERAGED Fp(INCH/HR) = 0.00  
 AREA-AVERAGED Ap = 1.00  
 EFFECTIVE STREAM AREA(ACRES) = 4.80  
 TOTAL STREAM AREA(ACRES) = 4.80  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 11.28

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	11.75	18.77	2.751	0.14( 0.14)	1.00	5.0	20.00
2	11.28	20.48	2.611	0.00( 0.00)	1.00	4.8	21.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	22.64	18.77	2.751	0.07( 0.07)	1.00	9.4	20.00
2	22.40	20.48	2.611	0.07( 0.07)	1.00	9.8	21.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
 PEAK FLOW RATE(CFS) = 22.64 Tc(MIN.) = 18.77  
 EFFECTIVE AREA(ACRES) = 9.40 AREA-AVERAGED Fm(INCH/HR) = 0.07  
 AREA-AVERAGED Fp(INCH/HR) = 0.07 AREA-AVERAGED Ap = 1.00  
 TOTAL AREA(ACRES) = 9.80  
 LONGEST FLOWPATH FROM NODE 20.00 TO NODE 22.00 = 850.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 22.00 TO NODE 25.00 IS CODE = 52

-----

-

>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 772.70 DOWNSTREAM(FEET) = 754.50
CHANNEL LENGTH THRU SUBAREA(FEET) = 1800.00 CHANNEL SLOPE = 0.0101
CHANNEL FLOW THRU SUBAREA(CFS) = 22.64
FLOW VELOCITY(FEET/SEC) = 3.12 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)
TRAVEL TIME(MIN.) = 9.63 Tc(MIN.) = 28.40
LONGEST FLOWPATH FROM NODE 20.00 TO NODE 25.00 = 2650.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 25.00 TO NODE 25.00 IS CODE = 81

-----

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 28.40
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.146
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN
NATURAL POOR COVER
"BARREN" A 26.70 0.14 1.00 93
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.14
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00
SUBAREA AREA(ACRES) = 26.70 SUBAREA RUNOFF(CFS) = 48.20
EFFECTIVE AREA(ACRES) = 36.10 AREA-AVERAGED Fm(INCH/HR) = 0.12
AREA-AVERAGED Fp(INCH/HR) = 0.12 AREA-AVERAGED Ap = 1.00
TOTAL AREA(ACRES) = 36.50 PEAK FLOW RATE(CFS) = 65.73

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 30.00 TO NODE 32.00 IS CODE = 21

-----

-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 1000.00
ELEVATION DATA: UPSTREAM(FEET) = 774.00 DOWNSTREAM(FEET) = 765.00
Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 12.360
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.535
SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE (MIN.)	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc
COMMERCIAL	A	0.30	0.80	0.10	52	
12.36 NATURAL POOR COVER "BARREN"	A	0.20	0.14	1.00	93	
21.35	SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.23					
	SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.46					
	SUBAREA RUNOFF(CFS) = 1.54					
	TOTAL AREA(ACRES) = 0.50 PEAK FLOW RATE(CFS) = 1.54					

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 32.00 TO NODE 34.00 IS CODE = 52

>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 765.00 DOWNSTREAM(FEET) = 755.00  
 CHANNEL LENGTH THRU SUBAREA(FEET) = 1100.00 CHANNEL SLOPE = 0.0091  
 CHANNEL FLOW THRU SUBAREA(CFS) = 1.54  
 FLOW VELOCITY(FEET/SEC) = 1.56 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
 TRAVEL TIME(MIN.) = 11.78 Tc(MIN.) = 24.14  
 LONGEST FLOWPATH FROM NODE 30.00 TO NODE 34.00 = 2100.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 34.00 TO NODE 34.00 IS CODE = 81

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 24.14  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.366  
 SUBAREA LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
COMMERCIAL	A	0.40	0.80	0.10	52
NATURAL POOR COVER "BARREN"	A	0.60	0.14	1.00	93
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.18					
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.64					
SUBAREA AREA(ACRES) = 1.00 SUBAREA RUNOFF(CFS) = 2.02					
EFFECTIVE AREA(ACRES) = 1.50 AREA-AVERAGED Fm(INCH/HR) = 0.11					
AREA-AVERAGED Fp(INCH/HR) = 0.19 AREA-AVERAGED Ap = 0.58					
TOTAL AREA(ACRES) = 1.50 PEAK FLOW RATE(CFS) = 3.04					

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 34.00 TO NODE 36.00 IS CODE = 52

-----  
-  
>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 755.00 DOWNSTREAM(FEET) = 749.40  
CHANNEL LENGTH THRU SUBAREA(FEET) = 1400.00 CHANNEL SLOPE = 0.0040  
CHANNEL FLOW THRU SUBAREA(CFS) = 3.04  
FLOW VELOCITY(FEET/SEC) = 1.19 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
TRAVEL TIME(MIN.) = 19.59 Tc(MIN.) = 43.73  
LONGEST FLOWPATH FROM NODE 30.00 TO NODE 36.00 = 3500.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 36.00 TO NODE 36.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 43.73  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 1.656  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 0.50 0.80 0.10 52  
NATURAL POOR COVER  
"BARREN" A 3.50 0.14 1.00 93  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.15  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.89  
SUBAREA AREA(ACRES) = 4.00 SUBAREA RUNOFF(CFS) = 5.49  
EFFECTIVE AREA(ACRES) = 5.50 AREA-AVERAGED Fm(INCH/HR) = 0.13  
AREA-AVERAGED Fp(INCH/HR) = 0.16 AREA-AVERAGED Ap = 0.80  
TOTAL AREA(ACRES) = 5.50 PEAK FLOW RATE(CFS) = 7.57

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 36.00 TO NODE 49.00 IS CODE = 52

-----  
-  
>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<  
>>>>TRAVELTIME THRU SUBAREA<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 749.40 DOWNSTREAM(FEET) = 746.10  
CHANNEL LENGTH THRU SUBAREA(FEET) = 1200.00 CHANNEL SLOPE = 0.0028  
CHANNEL FLOW THRU SUBAREA(CFS) = 7.57  
FLOW VELOCITY(FEET/SEC) = 1.22 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)  
TRAVEL TIME(MIN.) = 16.36 Tc(MIN.) = 60.09  
LONGEST FLOWPATH FROM NODE 30.00 TO NODE 49.00 = 4700.00 FEET.

\*\*\*\*\*

\*  
FLOW PROCESS FROM NODE 49.00 TO NODE 49.00 IS CODE = 81

-----  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====  
=  
MAINLINE Tc(MIN) = 60.09  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 1.369  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 0.36 0.80 0.10 52  
NATURAL POOR COVER  
"BARREN" A 3.64 0.14 1.00 93  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.15  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.92  
SUBAREA AREA(ACRES) = 4.00 SUBAREA RUNOFF(CFS) = 4.44  
EFFECTIVE AREA(ACRES) = 9.50 AREA-AVERAGED Fm(INCH/HR) = 0.13  
AREA-AVERAGED Fp(INCH/HR) = 0.15 AREA-AVERAGED Ap = 0.85  
TOTAL AREA(ACRES) = 9.50 PEAK FLOW RATE(CFS) = 10.59

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 49.00 TO NODE 49.00 IS CODE = 1

-----  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 60.09  
RAINFALL INTENSITY(INCH/HR) = 1.37  
AREA-AVERAGED Fm(INCH/HR) = 0.13  
AREA-AVERAGED Fp(INCH/HR) = 0.15  
AREA-AVERAGED Ap = 0.85  
EFFECTIVE STREAM AREA(ACRES) = 9.50  
TOTAL STREAM AREA(ACRES) = 9.50  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 10.59

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 40.00 TO NODE 42.00 IS CODE = 21

-----  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 740.00  
ELEVATION DATA: UPSTREAM(FEET) = 773.50 DOWNSTREAM(FEET) = 761.00  
  
Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20

SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.685

\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.953

SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
-------------------------------	-------------------	-----------------	-----------------	-----------------	-----------	--------------

NATURAL POOR COVER

"BARREN" A 1.60 0.14 1.00 93

16.68

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.14

SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00

SUBAREA RUNOFF(CFS) = 4.05

TOTAL AREA(ACRES) = 1.60 PEAK FLOW RATE(CFS) = 4.05

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 42.00 TO NODE 49.00 IS CODE = 52

-

>>>>COMPUTE NATURAL VALLEY CHANNEL FLOW<<<<<

>>>>TRAVELTIME THRU SUBAREA<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 761.00 DOWNSTREAM(FEET) = 746.10

CHANNEL LENGTH THRU SUBAREA(FEET) = 1930.00 CHANNEL SLOPE = 0.0077

CHANNEL FLOW THRU SUBAREA(CFS) = 4.05

FLOW VELOCITY(FEET/SEC) = 1.77 (PER LACFCD/RCFC&WCD HYDROLOGY MANUAL)

TRAVEL TIME(MIN.) = 18.22 Tc(MIN.) = 34.91

LONGEST FLOWPATH FROM NODE 40.00 TO NODE 49.00 = 2670.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 49.00 TO NODE 49.00 IS CODE = 81

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 34.91

\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 1.896

SUBAREA LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
-------------------------------	-------------------	-----------------	-----------------	-----------------	-----------

NATURAL POOR COVER

"BARREN" A 0.50 0.14 1.00 93

NATURAL POOR COVER

"BARREN" C 1.80 0.00 1.00 98

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.03

SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 1.00

SUBAREA AREA(ACRES) = 2.30 SUBAREA RUNOFF(CFS) = 3.86

EFFECTIVE AREA(ACRES) = 3.90 AREA-AVERAGED Fm(INCH/HR) = 0.08

AREA-AVERAGED Fp(INCH/HR) = 0.08 AREA-AVERAGED Ap = 1.00

TOTAL AREA(ACRES) = 3.90 PEAK FLOW RATE(CFS) = 6.39

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 49.00 TO NODE 49.00 IS CODE = 1

-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====
=

TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:
TIME OF CONCENTRATION(MIN.) = 34.91
RAINFALL INTENSITY(INCH/HR) = 1.90
AREA-AVERAGED Fm(INCH/HR) = 0.08
AREA-AVERAGED Fp(INCH/HR) = 0.08
AREA-AVERAGED Ap = 1.00
EFFECTIVE STREAM AREA(ACRES) = 3.90
TOTAL STREAM AREA(ACRES) = 3.90
PEAK FLOW RATE(CFS) AT CONFLUENCE = 6.39

\*\* CONFLUENCE DATA \*\*

Table with 8 columns: STREAM NUMBER, Q (CFS), Tc (MIN.), Intensity (INCH/HR), Fp(Fm) (INCH/HR), Ap, Ae (ACRES), HEADWATER NODE. Rows for streams 1 and 2.

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

Table with 8 columns: STREAM NUMBER, Q (CFS), Tc (MIN.), Intensity (INCH/HR), Fp(Fm) (INCH/HR), Ap, Ae (ACRES), HEADWATER NODE. Rows for streams 1 and 2.

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 15.16 Tc(MIN.) = 34.91
EFFECTIVE AREA(ACRES) = 9.42 AREA-AVERAGED Fm(INCH/HR) = 0.11
AREA-AVERAGED Fp(INCH/HR) = 0.12 AREA-AVERAGED Ap = 0.91
TOTAL AREA(ACRES) = 13.40
LONGEST FLOWPATH FROM NODE 30.00 TO NODE 49.00 = 4700.00 FEET.

\*\*\*\*\*
\*

FLOW PROCESS FROM NODE 50.00 TO NODE 53.00 IS CODE = 21

-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====
=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 432.00
ELEVATION DATA: UPSTREAM(FEET) = 773.50 DOWNSTREAM(FEET) = 770.00

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 9.023
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 4.270
SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE (MIN.)	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc
COMMERCIAL 9.02	A	0.12	0.80	0.10	52	
NATURAL POOR COVER "BARREN"	A	0.07	0.14	1.00	93	
15.58 COMMERCIAL 9.02	C	0.06	0.27	0.10	86	
NATURAL POOR COVER "BARREN"	C	0.05	0.00	1.00	98	
15.58	SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.15					
	SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.46					
	SUBAREA RUNOFF(CFS) = 1.13					
	TOTAL AREA(ACRES) = 0.30 PEAK FLOW RATE(CFS) = 1.13					

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 53.00 TO NODE 53.00 IS CODE = 1

-----

-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
 TIME OF CONCENTRATION(MIN.) = 9.02  
 RAINFALL INTENSITY(INCH/HR) = 4.27  
 AREA-AVERAGED Fm(INCH/HR) = 0.07  
 AREA-AVERAGED Fp(INCH/HR) = 0.15  
 AREA-AVERAGED Ap = 0.46  
 EFFECTIVE STREAM AREA(ACRES) = 0.30  
 TOTAL STREAM AREA(ACRES) = 0.30  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 1.13

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 51.00 TO NODE 53.00 IS CODE = 21

-----

-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 740.00  
 ELEVATION DATA: UPSTREAM(FEET) = 774.00 DOWNSTREAM(FEET) = 770.00

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 12.134  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.574

SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE (MIN.)	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc
---	-------------------	-----------------	-----------------	-----------------	-----------	----



```

    COMMERCIAL          A          0.32      0.80      0.10      52
12.13
    COMMERCIAL          C          0.22      0.27      0.10      86
12.13
    NATURAL POOR COVER
    "BARREN"            A          0.16      0.14      1.00      93
20.95
    NATURAL POOR COVER
    "BARREN"            C          0.12      0.00      1.00      98
20.95
    SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.16
    SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.41
    SUBAREA RUNOFF(CFS) = 2.59
    TOTAL AREA(ACRES) = 0.82    PEAK FLOW RATE(CFS) = 2.59

```

```

*****
*
    FLOW PROCESS FROM NODE      53.00 TO NODE      53.00 IS CODE = 1

```

```

-----
-
>>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
>>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

```

```

=====
=
    TOTAL NUMBER OF STREAMS = 2
    CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:
    TIME OF CONCENTRATION(MIN.) = 12.13
    RAINFALL INTENSITY(INCH/HR) = 3.57
    AREA-AVERAGED Fm(INCH/HR) = 0.07
    AREA-AVERAGED Fp(INCH/HR) = 0.16
    AREA-AVERAGED Ap = 0.41
    EFFECTIVE STREAM AREA(ACRES) = 0.82
    TOTAL STREAM AREA(ACRES) = 0.82
    PEAK FLOW RATE(CFS) AT CONFLUENCE = 2.59

```

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	1.13	9.02	4.270	0.15( 0.07)	0.46	0.3	50.00
2	2.59	12.13	3.574	0.16( 0.07)	0.41	0.8	51.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	3.44	9.02	4.270	0.16( 0.07)	0.42	0.9	50.00
2	3.54	12.13	3.574	0.16( 0.07)	0.42	1.1	51.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

```

PEAK FLOW RATE(CFS) = 3.54    Tc(MIN.) = 12.13
EFFECTIVE AREA(ACRES) = 1.12    AREA-AVERAGED Fm(INCH/HR) = 0.07
AREA-AVERAGED Fp(INCH/HR) = 0.16    AREA-AVERAGED Ap = 0.42
TOTAL AREA(ACRES) = 1.12
LONGEST FLOWPATH FROM NODE 51.00 TO NODE 53.00 = 740.00 FEET.

```

```

=====
=

```

END OF STUDY SUMMARY:

TOTAL AREA(ACRES) = 1.12 TC(MIN.) = 12.13  
EFFECTIVE AREA(ACRES) = 1.12 AREA-AVERAGED Fm(INCH/HR)= 0.07  
AREA-AVERAGED Fp(INCH/HR) = 0.16 AREA-AVERAGED Ap = 0.42  
PEAK FLOW RATE(CFS) = 3.54

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	3.44	9.02	4.270	0.16( 0.07)	0.42	0.9	50.00
2	3.54	12.13	3.574	0.16( 0.07)	0.42	1.1	51.00

=====

=

=====

=

END OF RATIONAL METHOD ANALYSIS

**C. Developed Condition Rational Method Hydrology Calculations**



\*\*\*\*\*  
\*

RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE  
(Reference: 1986 SAN BERNARDINO CO. HYDROLOGY CRITERION)  
(c) Copyright 1983-2003 Advanced Engineering Software (aes)  
Ver. 8.0 Release Date: 01/01/2003 License ID 1269

Analysis prepared by:

MDS Consulting  
17320 Redhill Avenue, Suite 350  
Irvine, CA 92614  
949-721-8821

\*\*\*\*\* DESCRIPTION OF STUDY  
\*\*\*\*\*

- \* Armstrong Ranch, City of Ontario
- \*
- \* Preliminary Hydrology
- \*
- \* 10-year storm

\*\*\*\*\*

FILE NAME: 80350.DAT  
TIME/DATE OF STUDY: 12:20 11/04/2015

=====  
=

USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:

=====  
=

--\*TIME-OF-CONCENTRATION MODEL\*--

USER SPECIFIED STORM EVENT(YEAR) = 10.00  
SPECIFIED MINIMUM PIPE SIZE(INCH) = 18.00  
SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95  
\*USER-DEFINED LOGARITHMIC INTERPOLATION USED FOR RAINFALL\*  
10-YEAR STORM 60-MINUTE INTENSITY(INCH/HOUR) = 0.906  
100-YEAR STORM 60-MINUTE INTENSITY(INCH/HOUR) = 1.370  
COMPUTED RAINFALL INTENSITY DATA:  
STORM EVENT = 10.00 1-HOUR INTENSITY(INCH/HOUR) = 0.9151  
SLOPE OF INTENSITY DURATION CURVE = 0.6000

\*ANTECEDENT MOISTURE CONDITION (AMC) II ASSUMED FOR RATIONAL METHOD\*

\*USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL\*  
HALF- CROWN TO STREET-CROSSFALL: CURB GUTTER-GEOMETRIES:  
MANNING  
WIDTH CROSSFALL IN- / OUT-/PARK- HEIGHT WIDTH LIP HIKE  
FACTOR  
NO. (FT) (FT) SIDE / SIDE/ WAY (FT) (FT) (FT) (FT) (n)  
=== =====  
=====

```

1 18.0 13.0 0.020/0.020/ --- 0.50 2.00 0.0313 0.167
0.0150
2 32.0 27.0 0.020/0.020/ --- 0.67 2.00 0.0313 0.167
0.0150

```

GLOBAL STREET FLOW-DEPTH CONSTRAINTS:

1. Relative Flow-Depth = 0.50 FEET  
as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
2. (Depth)\*(Velocity) Constraint = 6.0 (FT\*FT/S)

\*SIZE PIPE WITH A FLOW CAPACITY GREATER THAN  
OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.\*

\*USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

```

*****
*

```

FLOW PROCESS FROM NODE 1.00 TO NODE 3.00 IS CODE = 21

```

-----
-
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

```

```

=====
=

```

INITIAL SUBAREA FLOW-LENGTH(FEET) = 860.00  
ELEVATION DATA: UPSTREAM(FEET) = 779.70 DOWNSTREAM(FEET) = 775.20

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$

SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 12.970

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.294

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

(MIN.)	DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$
12.97	COMMERCIAL	A	1.06	0.98	0.10	32	
20.61	PUBLIC PARK	A	0.44	0.98	0.85	32	

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.98

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.32

SUBAREA RUNOFF(CFS) = 2.68

TOTAL AREA(ACRES) = 1.50 PEAK FLOW RATE(CFS) = 2.68

```

*****
*

```

FLOW PROCESS FROM NODE 3.00 TO NODE 5.00 IS CODE = 62

```

-----
-
>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<
>>>>(STREET TABLE SECTION # 1 USED)<<<<<

```

```

=====
=

```

UPSTREAM ELEVATION(FEET) = 775.20 DOWNSTREAM ELEVATION(FEET) = 767.50  
STREET LENGTH(FEET) = 960.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00

INSIDE STREET CROSSFALL(DECIMAL) = 0.020

OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 1  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 3.94  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.40  
HALFSTREET FLOOD WIDTH(FEET) = 12.28  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.32  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.94  
STREET FLOW TRAVEL TIME(MIN.) = 6.89 Tc(MIN.) = 19.86  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.776  
SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
COMMERCIAL	A	1.50	0.98	0.10	32
PUBLIC PARK	A	0.30	0.98	0.85	32

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.97  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.23  
SUBAREA AREA(ACRES) = 1.80 SUBAREA RUNOFF(CFS) = 2.52  
EFFECTIVE AREA(ACRES) = 3.30 AREA-AVERAGED Fm(INCH/HR) = 0.26  
AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.27  
TOTAL AREA(ACRES) = 3.30 PEAK FLOW RATE(CFS) = 4.50

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.42 HALFSTREET FLOOD WIDTH(FEET) = 13.03  
FLOW VELOCITY(FEET/SEC.) = 2.38 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.00  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 5.00 = 1820.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 5.00 TO NODE 10.00 IS CODE = 31

-----  
->>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<<  
>>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 760.50 DOWNSTREAM(FEET) = 754.60  
FLOW LENGTH(FEET) = 50.00 MANNING'S N = 0.013  
ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
DEPTH OF FLOW IN 18.0 INCH PIPE IS 4.3 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 13.67  
ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 4.50  
PIPE TRAVEL TIME(MIN.) = 0.06 Tc(MIN.) = 19.92  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 10.00 = 1870.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 10.00 TO NODE 10.00 IS CODE = 1

-----  
->>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<<

```

=====
=
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:
TIME OF CONCENTRATION(MIN.) = 19.92
RAINFALL INTENSITY(INCH/HR) = 1.77
AREA-AVERAGED Fm(INCH/HR) = 0.26
AREA-AVERAGED Fp(INCH/HR) = 0.98
AREA-AVERAGED Ap = 0.27
EFFECTIVE STREAM AREA(ACRES) = 3.30
TOTAL STREAM AREA(ACRES) = 3.30
PEAK FLOW RATE(CFS) AT CONFLUENCE = 4.50

```

\*\*\*\*\*

```

*
FLOW PROCESS FROM NODE 7.00 TO NODE 9.00 IS CODE = 21

```

```

-----
-
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

```

```

=====
=
INITIAL SUBAREA FLOW-LENGTH(FEET) = 850.00
ELEVATION DATA: UPSTREAM(FEET) = 773.30 DOWNSTREAM(FEET) = 762.30

```

```

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 13.782
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.212
SUBAREA Tc AND LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/          SCS SOIL   AREA      Fp        Ap        SCS   Tc
LAND USE                   GROUP   (ACRES)  (INCH/HR) (DECIMAL) CN  (MIN.)

```

```

RESIDENTIAL
"5-7 DWELLINGS/ACRE"      A        4.18      0.98      0.50      32
13.78
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA RUNOFF(CFS) = 6.49
TOTAL AREA(ACRES) = 4.18 PEAK FLOW RATE(CFS) = 6.49

```

\*\*\*\*\*

```

*
FLOW PROCESS FROM NODE 9.00 TO NODE 10.00 IS CODE = 31

```

```

-----
-
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

```

```

=====
=
ELEVATION DATA: UPSTREAM(FEET) = 755.30 DOWNSTREAM(FEET) = 754.60
FLOW LENGTH(FEET) = 190.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 21.0 INCH PIPE IS 12.9 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 4.20
ESTIMATED PIPE DIAMETER(INCH) = 21.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 6.49
PIPE TRAVEL TIME(MIN.) = 0.75 Tc(MIN.) = 14.54

```

LONGEST FLOWPATH FROM NODE 7.00 TO NODE 10.00 = 1040.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 10.00 TO NODE 10.00 IS CODE = 1

-----  
->>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<<  
>>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<<

=====  
=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 14.54  
RAINFALL INTENSITY(INCH/HR) = 2.14  
AREA-AVERAGED Fm(INCH/HR) = 0.49  
AREA-AVERAGED Fp(INCH/HR) = 0.98  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 4.18  
TOTAL STREAM AREA(ACRES) = 4.18  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 6.49

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	4.50	19.92	1.773	0.98( 0.26)	0.27	3.3	1.00
2	6.49	14.54	2.142	0.98( 0.49)	0.50	4.2	7.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	10.57	14.54	2.142	0.98( 0.40)	0.42	6.6	7.00
2	9.54	19.92	1.773	0.98( 0.39)	0.40	7.5	1.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 10.57 Tc(MIN.) = 14.54  
EFFECTIVE AREA(ACRES) = 6.59 AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.42  
TOTAL AREA(ACRES) = 7.48  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 10.00 = 1870.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 10.00 TO NODE 10.10 IS CODE = 31

-----  
->>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<<  
>>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<<

=====  
=

ELEVATION DATA: UPSTREAM(FEET) = 754.60 DOWNSTREAM(FEET) = 752.10  
FLOW LENGTH(FEET) = 690.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 24.0 INCH PIPE IS 16.2 INCHES



PIPE-FLOW VELOCITY(FEET/SEC.) = 4.69  
 ESTIMATED PIPE DIAMETER(INCH) = 24.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 10.57  
 PIPE TRAVEL TIME(MIN.) = 2.45 Tc(MIN.) = 16.99  
 LONGEST FLOWPATH FROM NODE 1.00 TO NODE 10.10 = 2560.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 10.10 TO NODE 10.10 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====  
=

TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
 TIME OF CONCENTRATION(MIN.) = 16.99  
 RAINFALL INTENSITY(INCH/HR) = 1.95  
 AREA-AVERAGED Fm(INCH/HR) = 0.40  
 AREA-AVERAGED Fp(INCH/HR) = 0.98  
 AREA-AVERAGED Ap = 0.42  
 EFFECTIVE STREAM AREA(ACRES) = 6.59  
 TOTAL STREAM AREA(ACRES) = 7.48  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 10.57

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 10.30 TO NODE 10.20 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 900.00  
 ELEVATION DATA: UPSTREAM(FEET) = 765.20 DOWNSTREAM(FEET) = 760.00

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$

SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.569

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.980

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
-------------------------------	-------------------	-----------------	-----------------	-----------------	-----------	--------------

RESIDENTIAL

"5-7 DWELLINGS/ACRE" A 2.52 0.98 0.50 32

16.57

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98

SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50

SUBAREA RUNOFF(CFS) = 3.39

TOTAL AREA(ACRES) = 2.52 PEAK FLOW RATE(CFS) = 3.39

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 10.20 TO NODE 10.10 IS CODE = 31

-----  
 -  
 >>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
 =  
 ELEVATION DATA: UPSTREAM(FEET) = 753.00 DOWNSTREAM(FEET) = 752.10  
 FLOW LENGTH(FEET) = 70.00 MANNING'S N = 0.013  
 ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
 DEPTH OF FLOW IN 18.0 INCH PIPE IS 6.7 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 5.69  
 ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 3.39  
 PIPE TRAVEL TIME(MIN.) = 0.20 Tc(MIN.) = 16.77  
 LONGEST FLOWPATH FROM NODE 10.30 TO NODE 10.10 = 970.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 10.10 TO NODE 10.10 IS CODE = 1

-----  
 -  
 >>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
 =  
 TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 16.77  
 RAINFALL INTENSITY(INCH/HR) = 1.97  
 AREA-AVERAGED Fm(INCH/HR) = 0.49  
 AREA-AVERAGED Fp(INCH/HR) = 0.98  
 AREA-AVERAGED Ap = 0.50  
 EFFECTIVE STREAM AREA(ACRES) = 2.52  
 TOTAL STREAM AREA(ACRES) = 2.52  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 3.39

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	10.57	16.99	1.951	0.98( 0.40)	0.42	6.6	7.00
1	9.54	22.42	1.652	0.98( 0.39)	0.40	7.5	1.00
2	3.39	16.77	1.966	0.98( 0.49)	0.50	2.5	10.30

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	13.93	16.77	1.966	0.98( 0.43)	0.44	9.0	10.30
2	13.92	16.99	1.951	0.98( 0.43)	0.44	9.1	7.00
3	12.21	22.42	1.652	0.97( 0.41)	0.42	10.0	1.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 13.93 Tc(MIN.) = 16.77  
 EFFECTIVE AREA(ACRES) = 9.03 AREA-AVERAGED Fm(INCH/HR) = 0.43  
 AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.44

TOTAL AREA(ACRES) = 10.00  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 10.10 = 2560.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 10.10 TO NODE 12.00 IS CODE = 31

-----  
->>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

ELEVATION DATA: UPSTREAM(FEET) = 752.10 DOWNSTREAM(FEET) = 751.90  
FLOW LENGTH(FEET) = 74.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 27.0 INCH PIPE IS 19.8 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 4.46  
ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 13.93  
PIPE TRAVEL TIME(MIN.) = 0.28 Tc(MIN.) = 17.05  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 12.00 = 2634.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 12.00 TO NODE 12.00 IS CODE = 81

-----  
->>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

MAINLINE Tc(MIN) = 17.05  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.947  
SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
COMMERCIAL	A	1.39	0.98	0.10	32
COMMERCIAL	C	1.26	0.57	0.10	69

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.78  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA AREA(ACRES) = 2.65 SUBAREA RUNOFF(CFS) = 4.46  
EFFECTIVE AREA(ACRES) = 11.68 AREA-AVERAGED Fm(INCH/HR) = 0.35  
AREA-AVERAGED Fp(INCH/HR) = 0.96 AREA-AVERAGED Ap = 0.36  
TOTAL AREA(ACRES) = 12.65 PEAK FLOW RATE(CFS) = 16.79

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 12.00 TO NODE 12.00 IS CODE = 81

-----  
->>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

MAINLINE Tc(MIN) = 17.05  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.947

SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
PUBLIC PARK	C	0.75	0.57	0.85	69

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.57  
SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.85  
SUBAREA AREA(ACRES) = 0.75      SUBAREA RUNOFF(CFS) = 0.99  
EFFECTIVE AREA(ACRES) = 12.43      AREA-AVERAGED  $F_m$ (INCH/HR) = 0.36  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.91      AREA-AVERAGED  $A_p$  = 0.39  
TOTAL AREA(ACRES) = 13.40      PEAK FLOW RATE(CFS) = 17.78

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE      12.00 TO NODE      69.00 IS CODE = 31

-----  
>>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 751.90      DOWNSTREAM(FEET) = 746.50  
FLOW LENGTH(FEET) = 550.00      MANNING'S N = 0.013  
DEPTH OF FLOW IN 24.0 INCH PIPE IS 16.4 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 7.75  
ESTIMATED PIPE DIAMETER(INCH) = 24.00      NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 17.78  
PIPE TRAVEL TIME(MIN.) = 1.18       $T_c$ (MIN.) = 18.23  
LONGEST FLOWPATH FROM NODE      1.00 TO NODE      69.00 = 3184.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE      69.00 TO NODE      69.00 IS CODE = 10

-----  
>>>>>MAIN-STREAM MEMORY COPIED ONTO MEMORY BANK # 1 <<<<<

=====  
=  
FLOW PROCESS FROM NODE      40.00 TO NODE      42.00 IS CODE = 21

-----  
>>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 770.00  
ELEVATION DATA: UPSTREAM(FEET) = 768.80      DOWNSTREAM(FEET) = 760.90  
  
 $T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 13.878  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.203

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
-------------------------------	-------------------	-----------------	-----------------	-----------------	-----------	--------------

RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	4.05	0.98	0.50	32	13.88
-------------------------------------	---	------	------	------	----	-------

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA RUNOFF(CFS) = 6.25  
 TOTAL AREA(ACRES) = 4.05 PEAK FLOW RATE(CFS) = 6.25

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 42.00 TO NODE 42.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

MAINLINE Tc(MIN) = 13.88  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.203  
 SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	0.88	0.98	0.50	32

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA AREA(ACRES) = 0.88 SUBAREA RUNOFF(CFS) = 1.36  
 EFFECTIVE AREA(ACRES) = 4.93 AREA-AVERAGED Fm(INCH/HR) = 0.49  
 AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 4.93 PEAK FLOW RATE(CFS) = 7.61

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 42.00 TO NODE 42.10 IS CODE = 31

-----  
-  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

ELEVATION DATA: UPSTREAM(FEET) = 753.90 DOWNSTREAM(FEET) = 752.80  
 FLOW LENGTH(FEET) = 270.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 21.0 INCH PIPE IS 13.8 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 4.52  
 ESTIMATED PIPE DIAMETER(INCH) = 21.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 7.61  
 PIPE TRAVEL TIME(MIN.) = 0.99 Tc(MIN.) = 14.87  
 LONGEST FLOWPATH FROM NODE 40.00 TO NODE 42.10 = 1040.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 42.10 TO NODE 42.10 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 14.87  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.113  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.45 0.98 0.50 32  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 0.17 0.57 0.50 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.93  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 1.62 SUBAREA RUNOFF(CFS) = 2.40  
EFFECTIVE AREA(ACRES) = 6.55 AREA-AVERAGED Fm(INCH/HR) = 0.48  
AREA-AVERAGED Fp(INCH/HR) = 0.96 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 6.55 PEAK FLOW RATE(CFS) = 9.61

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 42.10 TO NODE 42.20 IS CODE = 31

-----  
-  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 752.80 DOWNSTREAM(FEET) = 751.40  
FLOW LENGTH(FEET) = 35.00 MANNING'S N = 0.013  
ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
DEPTH OF FLOW IN 18.0 INCH PIPE IS 8.7 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 11.41  
ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 9.61  
PIPE TRAVEL TIME(MIN.) = 0.05 Tc(MIN.) = 14.92  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 42.20 = 1075.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 42.10 TO NODE 42.10 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 14.92  
RAINFALL INTENSITY(INCH/HR) = 2.11  
AREA-AVERAGED Fm(INCH/HR) = 0.48  
AREA-AVERAGED Fp(INCH/HR) = 0.96

AREA-AVERAGED Ap = 0.50  
 EFFECTIVE STREAM AREA(ACRES) = 6.55  
 TOTAL STREAM AREA(ACRES) = 6.55  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 9.61

\*\*\*\*\*  
 \*

FLOW PROCESS FROM NODE 43.00 TO NODE 43.10 IS CODE = 21

-----  
 -  
 >>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
 =  
 INITIAL SUBAREA FLOW-LENGTH(FEET) = 630.00  
 ELEVATION DATA: UPSTREAM(FEET) = 770.20 DOWNSTREAM(FEET) = 763.90

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 12.873  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.304

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	4.00	0.98	0.50	32	12.87

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA RUNOFF(CFS) = 6.54  
 TOTAL AREA(ACRES) = 4.00 PEAK FLOW RATE(CFS) = 6.54

\*\*\*\*\*  
 \*

FLOW PROCESS FROM NODE 43.10 TO NODE 43.20 IS CODE = 62

-----  
 -  
 >>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>(STREET TABLE SECTION # 1 USED)<<<<<

=====  
 =  
 UPSTREAM ELEVATION(FEET) = 763.90 DOWNSTREAM ELEVATION(FEET) = 762.80  
 STREET LENGTH(FEET) = 240.00 CURB HEIGHT(INCHES) = 6.0  
 STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
 INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
 OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
 Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) =  
 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 7.14  
 STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
 STREET FLOW DEPTH(FEET) = 0.42

HALFSTREET FLOOD WIDTH(FEET) = 13.28  
 AVERAGE FLOW VELOCITY(FEET/SEC.) = 1.83  
 PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.77  
 STREET FLOW TRAVEL TIME(MIN.) = 2.19 Tc(MIN.) = 15.06  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.097  
 SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	0.83	0.98	0.50	32

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA AREA(ACRES) = 0.83 SUBAREA RUNOFF(CFS) = 1.20  
 EFFECTIVE AREA(ACRES) = 4.83 AREA-AVERAGED Fm(INCH/HR) = 0.49  
 AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 4.83 PEAK FLOW RATE(CFS) = 7.00

END OF SUBAREA STREET FLOW HYDRAULICS:  
 DEPTH(FEET) = 0.42 HALFSTREET FLOOD WIDTH(FEET) = 13.16  
 FLOW VELOCITY(FEET/SEC.) = 1.82 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.77  
 LONGEST FLOWPATH FROM NODE 43.00 TO NODE 43.20 = 870.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 42.30 TO NODE 42.30 IS CODE = 1

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
 =  
 TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 15.06  
 RAINFALL INTENSITY(INCH/HR) = 2.10  
 AREA-AVERAGED Fm(INCH/HR) = 0.49  
 AREA-AVERAGED Fp(INCH/HR) = 0.98  
 AREA-AVERAGED Ap = 0.50  
 EFFECTIVE STREAM AREA(ACRES) = 4.83  
 TOTAL STREAM AREA(ACRES) = 4.83  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 7.00

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	9.61	14.92	2.109	0.96( 0.48)	0.50	6.6	40.00
2	7.00	15.06	2.097	0.98( 0.49)	0.50	4.8	43.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	16.60	14.92	2.109	0.97( 0.48)	0.50	11.3	40.00
2	16.54	15.06	2.097	0.97( 0.48)	0.50	11.4	43.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
 PEAK FLOW RATE(CFS) = 16.60 Tc(MIN.) = 14.92



EFFECTIVE AREA(ACRES) = 11.34 AREA-AVERAGED Fm(INCH/HR) = 0.48  
AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 11.38  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 42.30 = 1075.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 43.20 TO NODE 43.20 IS CODE = 81

-----  
->>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 14.92  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.109  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.77 0.98 0.50 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.97  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 1.77 SUBAREA RUNOFF(CFS) = 2.58  
EFFECTIVE AREA(ACRES) = 13.11 AREA-AVERAGED Fm(INCH/HR) = 0.48  
AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 13.15 PEAK FLOW RATE(CFS) = 19.15

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 43.20 TO NODE 43.30 IS CODE = 62

-----  
->>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<<

=====  
=  
UPSTREAM ELEVATION(FEET) = 762.80 DOWNSTREAM ELEVATION(FEET) = 761.10  
STREET LENGTH(FEET) = 238.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) =  
0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 20.14

\*\*\*STREET FLOWING FULL\*\*\*

STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:

NOTE: STREET FLOW EXCEEDS TOP OF CURB.

THE FOLLOWING STREET FLOW RESULTS ARE BASED ON THE ASSUMPTION

THAT NEGLIGIBLE FLOW OCCURS OUTSIDE OF THE STREET CHANNEL.

THAT IS, ALL FLOW ALONG THE PARKWAY, ETC., IS NEGLECTED.

STREET FLOW DEPTH(FEET) = 0.53

HALFSTREET FLOOD WIDTH(FEET) = 18.00  
 AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.80  
 PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 1.48  
 STREET FLOW TRAVEL TIME(MIN.) = 1.42 Tc(MIN.) = 16.34  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.997  
 SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
RESIDENTIAL					
"5-7 DWELLINGS/ACRE"	A	1.45	0.98	0.50	32

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA AREA(ACRES) = 1.45 SUBAREA RUNOFF(CFS) = 1.97  
 EFFECTIVE AREA(ACRES) = 14.56 AREA-AVERAGED Fm(INCH/HR) = 0.49  
 AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 14.60 PEAK FLOW RATE(CFS) = 19.81

END OF SUBAREA STREET FLOW HYDRAULICS:  
 DEPTH(FEET) = 0.52 HALFSTREET FLOOD WIDTH(FEET) = 18.00  
 FLOW VELOCITY(FEET/SEC.) = 2.79 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.46  
 LONGEST FLOWPATH FROM NODE 40.00 TO NODE 43.30 = 1313.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 43.30 TO NODE 42.20 IS CODE = 31

-----  
 -  
 >>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
 =  
 ELEVATION DATA: UPSTREAM(FEET) = 754.10 DOWNSTREAM(FEET) = 751.40  
 FLOW LENGTH(FEET) = 270.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 24.0 INCH PIPE IS 17.8 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 7.94  
 ESTIMATED PIPE DIAMETER(INCH) = 24.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 19.81  
 PIPE TRAVEL TIME(MIN.) = 0.57 Tc(MIN.) = 16.91  
 LONGEST FLOWPATH FROM NODE 40.00 TO NODE 42.20 = 1583.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 42.20 TO NODE 42.30 IS CODE = 31

-----  
 -  
 >>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
 =  
 ELEVATION DATA: UPSTREAM(FEET) = 751.40 DOWNSTREAM(FEET) = 750.40  
 FLOW LENGTH(FEET) = 250.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 30.0 INCH PIPE IS 20.0 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 5.70  
 ESTIMATED PIPE DIAMETER(INCH) = 30.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 19.81  
 PIPE TRAVEL TIME(MIN.) = 0.73 Tc(MIN.) = 17.64

LONGEST FLOWPATH FROM NODE 40.00 TO NODE 42.30 = 1833.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 42.30 TO NODE 42.30 IS CODE = 81

-----  
->>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=

MAINLINE Tc(MIN) = 17.64  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.908  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.09 0.98 0.50 32  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 0.49 0.57 0.50 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.85  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 1.58 SUBAREA RUNOFF(CFS) = 2.11  
EFFECTIVE AREA(ACRES) = 16.14 AREA-AVERAGED Fm(INCH/HR) = 0.48  
AREA-AVERAGED Fp(INCH/HR) = 0.96 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 16.18 PEAK FLOW RATE(CFS) = 20.74

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 42.30 TO NODE 56.00 IS CODE = 31

-----  
->>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=

ELEVATION DATA: UPSTREAM(FEET) = 750.40 DOWNSTREAM(FEET) = 749.50  
FLOW LENGTH(FEET) = 210.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 30.0 INCH PIPE IS 20.2 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.91  
ESTIMATED PIPE DIAMETER(INCH) = 30.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 20.74  
PIPE TRAVEL TIME(MIN.) = 0.59 Tc(MIN.) = 18.23  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 56.00 = 2043.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 56.00 TO NODE 56.00 IS CODE = 81

-----  
->>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=

MAINLINE Tc(MIN) = 18.23

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.870  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 3.62 0.57 0.50 69  
PUBLIC PARK C 1.30 0.57 0.85 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.59  
SUBAREA AREA(ACRES) = 4.92 SUBAREA RUNOFF(CFS) = 6.80  
EFFECTIVE AREA(ACRES) = 21.06 AREA-AVERAGED Fm(INCH/HR) = 0.45  
AREA-AVERAGED Fp(INCH/HR) = 0.85 AREA-AVERAGED Ap = 0.52  
TOTAL AREA(ACRES) = 21.10 PEAK FLOW RATE(CFS) = 27.00

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 56.00 TO NODE 59.00 IS CODE = 31

-

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 749.50 DOWNSTREAM(FEET) = 747.10  
FLOW LENGTH(FEET) = 620.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 33.0 INCH PIPE IS 23.2 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.05  
ESTIMATED PIPE DIAMETER(INCH) = 33.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 27.00  
PIPE TRAVEL TIME(MIN.) = 1.71 Tc(MIN.) = 19.94  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 59.00 = 2663.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 59.00 TO NODE 59.00 IS CODE = 1

-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 19.94  
RAINFALL INTENSITY(INCH/HR) = 1.77  
AREA-AVERAGED Fm(INCH/HR) = 0.45  
AREA-AVERAGED Fp(INCH/HR) = 0.85  
AREA-AVERAGED Ap = 0.52  
EFFECTIVE STREAM AREA(ACRES) = 21.06  
TOTAL STREAM AREA(ACRES) = 21.10  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 27.00

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 58.00 TO NODE 59.00 IS CODE = 21

-----  
 -  
 >>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
 =  
 INITIAL SUBAREA FLOW-LENGTH(FEET) = 620.00  
 ELEVATION DATA: UPSTREAM(FEET) = 761.50 DOWNSTREAM(FEET) = 759.60

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 17.162  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.939

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
RESIDENTIAL "3-4 DWELLINGS/ACRE"	C	3.49	0.57	0.60	69	17.16

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60  
 SUBAREA RUNOFF(CFS) = 5.02  
 TOTAL AREA(ACRES) = 3.49 PEAK FLOW RATE(CFS) = 5.02

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 59.00 TO NODE 59.00 IS CODE = 1

-----  
 -  
 >>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
 =  
 TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 17.16  
 RAINFALL INTENSITY(INCH/HR) = 1.94  
 AREA-AVERAGED Fm(INCH/HR) = 0.34  
 AREA-AVERAGED Fp(INCH/HR) = 0.57  
 AREA-AVERAGED Ap = 0.60  
 EFFECTIVE STREAM AREA(ACRES) = 3.49  
 TOTAL STREAM AREA(ACRES) = 3.49  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 5.02

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	27.00	19.94	1.772	0.85( 0.45)	0.52	21.1	40.00
1	26.88	20.08	1.765	0.85( 0.45)	0.52	21.1	43.00
2	5.02	17.16	1.939	0.57( 0.34)	0.60	3.5	58.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	31.18	17.16	1.939	0.80( 0.43)	0.53	21.6	58.00

2	31.50	19.94	1.772	0.81( 0.43)	0.53	24.5	40.00
3	31.36	20.08	1.765	0.81( 0.43)	0.53	24.6	43.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 31.50 Tc(MIN.) = 19.94  
 EFFECTIVE AREA(ACRES) = 24.55 AREA-AVERAGED Fm(INCH/HR) = 0.43  
 AREA-AVERAGED Fp(INCH/HR) = 0.81 AREA-AVERAGED Ap = 0.53  
 TOTAL AREA(ACRES) = 24.59  
 LONGEST FLOWPATH FROM NODE 40.00 TO NODE 59.00 = 2663.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 59.00 TO NODE 67.00 IS CODE = 31

-----  
 -  
 >>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
 =  
 ELEVATION DATA: UPSTREAM(FEET) = 747.70 DOWNSTREAM(FEET) = 747.00  
 FLOW LENGTH(FEET) = 45.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 27.0 INCH PIPE IS 18.9 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 10.60  
 ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 31.50  
 PIPE TRAVEL TIME(MIN.) = 0.07 Tc(MIN.) = 20.01  
 LONGEST FLOWPATH FROM NODE 40.00 TO NODE 67.00 = 2708.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 67.00 TO NODE 67.00 IS CODE = 10

-----  
 -  
 >>>>MAIN-STREAM MEMORY COPIED ONTO MEMORY BANK # 2 <<<<<

=====  
 =  
 \*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 60.00 TO NODE 62.00 IS CODE = 21

-----  
 -  
 >>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
 =  
 INITIAL SUBAREA FLOW-LENGTH(FEET) = 300.00  
 ELEVATION DATA: UPSTREAM(FEET) = 764.00 DOWNSTREAM(FEET) = 759.70  
  
 $T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 9.429  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.778  
 SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
RESIDENTIAL "3-4 DWELLINGS/ACRE"	C	2.25	0.57	0.60	69	9.43

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60  
 SUBAREA RUNOFF(CFS) = 4.94  
 TOTAL AREA(ACRES) = 2.25 PEAK FLOW RATE(CFS) = 4.94

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 62.00 TO NODE 66.00 IS CODE = 31

-----  
-  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 752.70 DOWNSTREAM(FEET) = 752.10  
 FLOW LENGTH(FEET) = 165.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 18.0 INCH PIPE IS 12.2 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 3.88  
 ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 4.94  
 PIPE TRAVEL TIME(MIN.) = 0.71 Tc(MIN.) = 10.14  
 LONGEST FLOWPATH FROM NODE 60.00 TO NODE 66.00 = 465.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 66.00 TO NODE 66.00 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
 TIME OF CONCENTRATION(MIN.) = 10.14  
 RAINFALL INTENSITY(INCH/HR) = 2.66  
 AREA-AVERAGED Fm(INCH/HR) = 0.34  
 AREA-AVERAGED Fp(INCH/HR) = 0.57  
 AREA-AVERAGED Ap = 0.60  
 EFFECTIVE STREAM AREA(ACRES) = 2.25  
 TOTAL STREAM AREA(ACRES) = 2.25  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 4.94

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 63.00 TO NODE 65.00 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<

>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 270.00  
ELEVATION DATA: UPSTREAM(FEET) = 763.60 DOWNSTREAM(FEET) = 760.30

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$

SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 8.812

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.893

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
-------------------------------	-------------------	-----------------	--------------------	--------------------	-----------	-----------------

RESIDENTIAL

"5-7 DWELLINGS/ACRE" C 1.38 0.57 0.50 69

8.81

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.57

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.50

SUBAREA RUNOFF(CFS) = 3.24

TOTAL AREA(ACRES) = 1.38 PEAK FLOW RATE(CFS) = 3.24

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 65.00 TO NODE 66.00 IS CODE = 31

-----

-

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<

>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 753.30 DOWNSTREAM(FEET) = 752.10

FLOW LENGTH(FEET) = 300.00 MANNING'S N = 0.013

ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000

DEPTH OF FLOW IN 18.0 INCH PIPE IS 9.0 INCHES

PIPE-FLOW VELOCITY(FEET/SEC.) = 3.66

ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1

PIPE-FLOW(CFS) = 3.24

PIPE TRAVEL TIME(MIN.) = 1.37  $T_c$ (MIN.) = 10.18

LONGEST FLOWPATH FROM NODE 63.00 TO NODE 66.00 = 570.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 66.00 TO NODE 66.00 IS CODE = 1

-----

-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<

>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2

CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:

TIME OF CONCENTRATION(MIN.) = 10.18

RAINFALL INTENSITY(INCH/HR) = 2.65

AREA-AVERAGED  $F_m$ (INCH/HR) = 0.28

AREA-AVERAGED  $F_p$ (INCH/HR) = 0.57



AREA-AVERAGED  $A_p$  = 0.50  
 EFFECTIVE STREAM AREA(ACRES) = 1.38  
 TOTAL STREAM AREA(ACRES) = 1.38  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 3.24

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	4.94	10.14	2.659	0.57( 0.34)	0.60	2.2	60.00
2	3.24	10.18	2.653	0.57( 0.28)	0.50	1.4	63.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	8.17	10.14	2.659	0.57( 0.32)	0.56	3.6	60.00
2	8.16	10.18	2.653	0.57( 0.32)	0.56	3.6	63.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 8.17 Tc(MIN.) = 10.14  
 EFFECTIVE AREA(ACRES) = 3.62 AREA-AVERAGED Fm(INCH/HR) = 0.32  
 AREA-AVERAGED Fp(INCH/HR) = 0.57 AREA-AVERAGED  $A_p$  = 0.56  
 TOTAL AREA(ACRES) = 3.63  
 LONGEST FLOWPATH FROM NODE 63.00 TO NODE 66.00 = 570.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 66.00 TO NODE 67.00 IS CODE = 31

-----  
 -

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<

=====  
 =

ELEVATION DATA: UPSTREAM(FEET) = 752.10 DOWNSTREAM(FEET) = 747.00  
 FLOW LENGTH(FEET) = 140.00 MANNING'S N = 0.013  
 ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
 DEPTH OF FLOW IN 18.0 INCH PIPE IS 8.1 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 10.57  
 ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 8.17  
 PIPE TRAVEL TIME(MIN.) = 0.22 Tc(MIN.) = 10.36  
 LONGEST FLOWPATH FROM NODE 63.00 TO NODE 67.00 = 710.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 67.00 TO NODE 67.00 IS CODE = 11

-----  
 -

>>>>CONFLUENCE MEMORY BANK # 2 WITH THE MAIN-STREAM MEMORY<<<<

=====  
 =

\*\* MAIN STREAM CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	8.17	10.36	2.625	0.57( 0.32)	0.56	3.6	60.00
2	8.16	10.40	2.619	0.57( 0.32)	0.56	3.6	63.00

LONGEST FLOWPATH FROM NODE 63.00 TO NODE 67.00 = 710.00 FEET.

\*\* MEMORY BANK # 2 CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	31.18	17.23	1.934	0.80( 0.43)	0.53	21.6	58.00
2	31.50	20.01	1.769	0.81( 0.43)	0.53	24.5	40.00
3	31.36	20.15	1.761	0.81( 0.43)	0.53	24.6	43.00

LONGEST FLOWPATH FROM NODE 40.00 TO NODE 67.00 = 2708.00 FEET.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	35.52	10.36	2.625	0.75( 0.40)	0.54	16.6	60.00
2	35.54	10.40	2.619	0.75( 0.40)	0.54	16.7	63.00
3	36.92	17.23	1.934	0.77( 0.41)	0.54	25.2	58.00
4	36.64	20.01	1.769	0.78( 0.42)	0.54	28.2	40.00
5	36.48	20.15	1.761	0.78( 0.42)	0.54	28.2	43.00

TOTAL AREA(ACRES) = 28.22

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 36.92 Tc(MIN.) = 17.233  
EFFECTIVE AREA(ACRES) = 25.25 AREA-AVERAGED Fm(INCH/HR) = 0.41  
AREA-AVERAGED Fp(INCH/HR) = 0.77 AREA-AVERAGED Ap = 0.54  
TOTAL AREA(ACRES) = 28.22  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 67.00 = 2708.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 67.00 TO NODE 69.00 IS CODE = 31

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

ELEVATION DATA: UPSTREAM(FEET) = 747.00 DOWNSTREAM(FEET) = 746.50  
FLOW LENGTH(FEET) = 150.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 36.0 INCH PIPE IS 29.0 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.05  
ESTIMATED PIPE DIAMETER(INCH) = 36.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 36.92  
PIPE TRAVEL TIME(MIN.) = 0.41 Tc(MIN.) = 17.65  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 69.00 = 2858.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 69.00 TO NODE 69.00 IS CODE = 11

>>>>CONFLUENCE MEMORY BANK # 1 WITH THE MAIN-STREAM MEMORY<<<<<

=

\*\* MAIN STREAM CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	35.52	10.77	2.564	0.75( 0.40)	0.54	16.6	60.00
2	35.54	10.81	2.559	0.75( 0.40)	0.54	16.7	63.00
3	36.92	17.65	1.907	0.77( 0.41)	0.54	25.2	58.00
4	36.64	20.42	1.747	0.78( 0.42)	0.54	28.2	40.00
5	36.48	20.57	1.740	0.78( 0.42)	0.54	28.2	43.00

LONGEST FLOWPATH FROM NODE 40.00 TO NODE 69.00 = 2858.00 FEET.

\*\* MEMORY BANK # 1 CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	17.78	18.23	1.870	0.91( 0.36)	0.39	12.4	10.30
2	17.73	18.45	1.857	0.91( 0.36)	0.39	12.5	7.00
3	15.54	23.92	1.589	0.91( 0.35)	0.38	13.4	1.00

LONGEST FLOWPATH FROM NODE 1.00 TO NODE 69.00 = 3184.00 FEET.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	50.84	10.77	2.564	0.79( 0.39)	0.49	24.0	60.00
2	50.88	10.81	2.559	0.79( 0.39)	0.49	24.0	63.00
3	54.55	17.65	1.907	0.80( 0.39)	0.49	37.3	58.00
4	54.64	18.23	1.870	0.81( 0.39)	0.49	38.3	10.30
5	54.57	18.45	1.857	0.81( 0.40)	0.49	38.6	7.00
6	53.59	20.42	1.747	0.81( 0.40)	0.49	41.0	40.00
7	53.37	20.57	1.740	0.81( 0.40)	0.49	41.1	43.00
8	47.87	23.92	1.589	0.81( 0.39)	0.49	41.6	1.00

TOTAL AREA(ACRES) = 41.62

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 54.64 Tc(MIN.) = 18.233  
EFFECTIVE AREA(ACRES) = 38.29 AREA-AVERAGED Fm(INCH/HR) = 0.39  
AREA-AVERAGED Fp(INCH/HR) = 0.81 AREA-AVERAGED Ap = 0.49  
TOTAL AREA(ACRES) = 41.62  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 69.00 = 3184.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 69.00 TO NODE 69.00 IS CODE = 10

-----

-

>>>>MAIN-STREAM MEMORY COPIED ONTO MEMORY BANK # 3 <<<<<

=====

=

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 24.00 TO NODE 25.00 IS CODE = 21

-----

-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

```
=====
=
INITIAL SUBAREA FLOW-LENGTH(FEET) = 950.00
ELEVATION DATA: UPSTREAM(FEET) = 771.70 DOWNSTREAM(FEET) = 765.00
```

```
Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.269
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.002
SUBAREA Tc AND LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN
(MIN.)
RESIDENTIAL
"5-7 DWELLINGS/ACRE" C 3.84 0.57 0.50 69
16.27
```

```
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA RUNOFF(CFS) = 5.94
TOTAL AREA(ACRES) = 3.84 PEAK FLOW RATE(CFS) = 5.94
```

```
*****
*
FLOW PROCESS FROM NODE 25.00 TO NODE 25.10 IS CODE = 31
```

```
-----
-
>>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
>>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
```

```
=====
=
ELEVATION DATA: UPSTREAM(FEET) = 758.00 DOWNSTREAM(FEET) = 756.90
FLOW LENGTH(FEET) = 245.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 18.0 INCH PIPE IS 12.9 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 4.37
ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 5.94
PIPE TRAVEL TIME(MIN.) = 0.93 Tc(MIN.) = 17.20
LONGEST FLOWPATH FROM NODE 24.00 TO NODE 25.10 = 1195.00 FEET.
```

```
*****
*
FLOW PROCESS FROM NODE 25.10 TO NODE 25.10 IS CODE = 81
```

```
-----
-
>>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
```

```
=====
=
MAINLINE Tc(MIN) = 17.20
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.936
SUBAREA LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE" C 3.18 0.57 0.50 69
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA AREA(ACRES) = 3.18 SUBAREA RUNOFF(CFS) = 4.73
```

EFFECTIVE AREA(ACRES) = 7.02 AREA-AVERAGED Fm(INCH/HR) = 0.28  
AREA-AVERAGED Fp(INCH/HR) = 0.57 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 7.02 PEAK FLOW RATE(CFS) = 10.45

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 25.10 TO NODE 25.10 IS CODE = 81

-----  
-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 17.20  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.936  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 0.78 0.98 0.50 32  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 1.00 0.57 0.50 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.75  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 1.78 SUBAREA RUNOFF(CFS) = 2.51  
EFFECTIVE AREA(ACRES) = 8.80 AREA-AVERAGED Fm(INCH/HR) = 0.30  
AREA-AVERAGED Fp(INCH/HR) = 0.60 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 8.80 PEAK FLOW RATE(CFS) = 12.95

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 25.10 TO NODE 29.00 IS CODE = 31

-----  
-

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 756.90 DOWNSTREAM(FEET) = 755.90  
FLOW LENGTH(FEET) = 295.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 27.0 INCH PIPE IS 17.2 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 4.83  
ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 12.95  
PIPE TRAVEL TIME(MIN.) = 1.02 Tc(MIN.) = 18.22  
LONGEST FLOWPATH FROM NODE 24.00 TO NODE 29.00 = 1490.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 29.00 TO NODE 29.00 IS CODE = 1

-----  
-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====

```

=
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:
TIME OF CONCENTRATION(MIN.) = 18.22
RAINFALL INTENSITY(INCH/HR) = 1.87
AREA-AVERAGED Fm(INCH/HR) = 0.30
AREA-AVERAGED Fp(INCH/HR) = 0.60
AREA-AVERAGED Ap = 0.50
EFFECTIVE STREAM AREA(ACRES) = 8.80
TOTAL STREAM AREA(ACRES) = 8.80
PEAK FLOW RATE(CFS) AT CONFLUENCE = 12.95

```

```

*****
*

```

```

FLOW PROCESS FROM NODE 20.00 TO NODE 22.00 IS CODE = 21

```

```

-----
-
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

```

```

=====
=
INITIAL SUBAREA FLOW-LENGTH(FEET) = 995.00
ELEVATION DATA: UPSTREAM(FEET) = 773.30 DOWNSTREAM(FEET) = 766.10

```

```

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.488
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.986

```

```

SUBAREA Tc AND LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/      SCS SOIL   AREA      Fp        Ap        SCS   Tc
LAND USE              GROUP   (ACRES) (INCH/HR) (DECIMAL) CN
(MIN.)
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   A      1.67     0.98     0.50     32
16.49
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   C      0.78     0.57     0.50     69
16.49
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.84
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA RUNOFF(CFS) = 3.45
TOTAL AREA(ACRES) = 2.45 PEAK FLOW RATE(CFS) = 3.45

```

```

*****
*

```

```

FLOW PROCESS FROM NODE 22.00 TO NODE 29.00 IS CODE = 62

```

```

-----
-
>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<
>>>>(STREET TABLE SECTION # 1 USED)<<<<<

```

```

=====
=
UPSTREAM ELEVATION(FEET) = 766.10 DOWNSTREAM ELEVATION(FEET) = 762.90
STREET LENGTH(FEET) = 630.00 CURB HEIGHT(INCHES) = 6.0
STREET HALFWIDTH(FEET) = 18.00

```

```

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00

```

INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 1  
Manning's FRICTION FACTOR for Streetflow Section(curb-to-curb) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 5.10  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.46  
HALFSTREET FLOOD WIDTH(FEET) = 15.09  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.07  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.95  
STREET FLOW TRAVEL TIME(MIN.) = 5.08 Tc(MIN.) = 21.57  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.690  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 2.60 0.57 0.50 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 2.60 SUBAREA RUNOFF(CFS) = 3.29  
EFFECTIVE AREA(ACRES) = 5.05 AREA-AVERAGED Fm(INCH/HR) = 0.35  
AREA-AVERAGED Fp(INCH/HR) = 0.70 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 5.05 PEAK FLOW RATE(CFS) = 6.09

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.48 HALFSTREET FLOOD WIDTH(FEET) = 16.22  
FLOW VELOCITY(FEET/SEC.) = 2.16 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.04  
LONGEST FLOWPATH FROM NODE 20.00 TO NODE 29.00 = 1625.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 29.00 TO NODE 29.00 IS CODE = 1

-----

-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 21.57  
RAINFALL INTENSITY(INCH/HR) = 1.69  
AREA-AVERAGED Fm(INCH/HR) = 0.35  
AREA-AVERAGED Fp(INCH/HR) = 0.70  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 5.05  
TOTAL STREAM AREA(ACRES) = 5.05  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 6.09

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	12.95	18.22	1.871	0.60(0.30)	0.50	8.8	24.00
2	6.09	21.57	1.690	0.70(0.35)	0.50	5.0	20.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO

CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	18.79	18.22	1.871	0.63( 0.32)	0.50	13.1	24.00
2	17.55	21.57	1.690	0.64( 0.32)	0.50	13.9	20.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 18.79 Tc(MIN.) = 18.22  
EFFECTIVE AREA(ACRES) = 13.07 AREA-AVERAGED Fm(INCH/HR) = 0.32  
AREA-AVERAGED Fp(INCH/HR) = 0.63 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 13.85  
LONGEST FLOWPATH FROM NODE 20.00 TO NODE 29.00 = 1625.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 29.00 TO NODE 39.00 IS CODE = 31

-----  
-

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 755.90 DOWNSTREAM(FEET) = 751.00  
FLOW LENGTH(FEET) = 380.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 24.0 INCH PIPE IS 15.5 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 8.75  
ESTIMATED PIPE DIAMETER(INCH) = 24.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 18.79  
PIPE TRAVEL TIME(MIN.) = 0.72 Tc(MIN.) = 18.94  
LONGEST FLOWPATH FROM NODE 20.00 TO NODE 39.00 = 2005.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 39.00 TO NODE 39.00 IS CODE = 12

-----  
-

>>>>CLEAR MEMORY BANK # 1 <<<<<

=====

=

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 39.00 TO NODE 39.00 IS CODE = 12

-----  
-

>>>>CLEAR MEMORY BANK # 2 <<<<<

=====

=

\*\*\*\*\*



```

*
FLOW PROCESS FROM NODE      39.00 TO NODE      39.00 IS CODE =   1
-----
-
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<
=====
=
TOTAL NUMBER OF STREAMS =  2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  1 ARE:
TIME OF CONCENTRATION(MIN.) =  18.94
RAINFALL INTENSITY(INCH/HR) =  1.83
AREA-AVERAGED Fm(INCH/HR) =  0.32
AREA-AVERAGED Fp(INCH/HR) =  0.63
AREA-AVERAGED Ap =  0.50
EFFECTIVE STREAM AREA(ACRES) =  13.07
TOTAL STREAM AREA(ACRES) =  13.85
PEAK FLOW RATE(CFS) AT CONFLUENCE =  18.79

```

```

*****
*
FLOW PROCESS FROM NODE      30.00 TO NODE      32.00 IS CODE =  21
-----
-
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
=====
=
INITIAL SUBAREA FLOW-LENGTH(FEET) =  1000.00
ELEVATION DATA: UPSTREAM(FEET) =  771.70  DOWNSTREAM(FEET) =  763.40

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =  16.074
* 10 YEAR RAINFALL INTENSITY(INCH/HR) =  2.017
SUBAREA Tc AND LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp      Ap      SCS  Tc
LAND USE              GROUP  (ACRES) (INCH/HR) (DECIMAL) CN
(MIN.)
RESIDENTIAL
"5-7 DWELLINGS/ACRE"    C      2.23    0.57    0.50    69
16.07
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.57
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.50
SUBAREA RUNOFF(CFS) =  3.48
TOTAL AREA(ACRES) =  2.23  PEAK FLOW RATE(CFS) =  3.48

```

```

*****
*
FLOW PROCESS FROM NODE      32.00 TO NODE      32.00 IS CODE =  81
-----
-
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
=
MAINLINE Tc(MIN) =  16.07

```

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.017  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.08 0.98 0.50 32  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 0.50 0.57 0.50 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.85  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 1.58 SUBAREA RUNOFF(CFS) = 2.27  
EFFECTIVE AREA(ACRES) = 3.81 AREA-AVERAGED Fm(INCH/HR) = 0.34  
AREA-AVERAGED Fp(INCH/HR) = 0.68 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 3.81 PEAK FLOW RATE(CFS) = 5.75

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 32.00 TO NODE 32.10 IS CODE = 31

-

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 756.40 DOWNSTREAM(FEET) = 754.00  
FLOW LENGTH(FEET) = 270.00 MANNING'S N = 0.013  
ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
DEPTH OF FLOW IN 18.0 INCH PIPE IS 10.0 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.70  
ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 5.75  
PIPE TRAVEL TIME(MIN.) = 0.79 Tc(MIN.) = 16.86  
LONGEST FLOWPATH FROM NODE 30.00 TO NODE 32.10 = 1270.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 32.10 TO NODE 32.10 IS CODE = 81

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 16.86  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.960  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 2.36 0.98 0.50 32  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 0.89 0.57 0.50 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.86  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 3.25 SUBAREA RUNOFF(CFS) = 4.47  
EFFECTIVE AREA(ACRES) = 7.06 AREA-AVERAGED Fm(INCH/HR) = 0.38  
AREA-AVERAGED Fp(INCH/HR) = 0.77 AREA-AVERAGED Ap = 0.50

TOTAL AREA(ACRES) = 7.06 PEAK FLOW RATE(CFS) = 10.02

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 32.10 TO NODE 34.00 IS CODE = 31

-----  
->>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<<  
>>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 754.00 DOWNSTREAM(FEET) = 752.60  
FLOW LENGTH(FEET) = 295.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 21.0 INCH PIPE IS 16.2 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.03  
ESTIMATED PIPE DIAMETER(INCH) = 21.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 10.02  
PIPE TRAVEL TIME(MIN.) = 0.98 Tc(MIN.) = 17.84  
LONGEST FLOWPATH FROM NODE 30.00 TO NODE 34.00 = 1565.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 34.00 TO NODE 34.00 IS CODE = 81

-----  
->>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<<

=====  
=  
MAINLINE Tc(MIN) = 17.84  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.894  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.59 0.98 0.50 32  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 3.88 0.57 0.50 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.68  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 5.47 SUBAREA RUNOFF(CFS) = 7.64  
EFFECTIVE AREA(ACRES) = 12.53 AREA-AVERAGED Fm(INCH/HR) = 0.37  
AREA-AVERAGED Fp(INCH/HR) = 0.73 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 12.53 PEAK FLOW RATE(CFS) = 17.25

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 34.00 TO NODE 39.00 IS CODE = 31

-----  
->>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<<  
>>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<<

=====  
=

ELEVATION DATA: UPSTREAM(FEET) = 752.60 DOWNSTREAM(FEET) = 751.00  
 FLOW LENGTH(FEET) = 440.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 27.0 INCH PIPE IS 21.0 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 5.21  
 ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 17.25  
 PIPE TRAVEL TIME(MIN.) = 1.41 Tc(MIN.) = 19.25  
 LONGEST FLOWPATH FROM NODE 30.00 TO NODE 39.00 = 2005.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 39.00 TO NODE 39.00 IS CODE = 1

-----  
 -  
 >>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
 =  
 TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 19.25  
 RAINFALL INTENSITY(INCH/HR) = 1.81  
 AREA-AVERAGED Fm(INCH/HR) = 0.37  
 AREA-AVERAGED Fp(INCH/HR) = 0.73  
 AREA-AVERAGED Ap = 0.50  
 EFFECTIVE STREAM AREA(ACRES) = 12.53  
 TOTAL STREAM AREA(ACRES) = 12.53  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 17.25

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	18.79	18.94	1.827	0.63( 0.32)	0.50	13.1	24.00
1	17.55	22.31	1.657	0.64( 0.32)	0.50	13.9	20.00
2	17.25	19.25	1.810	0.73( 0.37)	0.50	12.5	30.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	35.96	18.94	1.827	0.68( 0.34)	0.50	25.4	24.00
2	35.92	19.25	1.810	0.68( 0.34)	0.50	25.7	30.00
3	32.97	22.31	1.657	0.68( 0.34)	0.50	26.4	20.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
 PEAK FLOW RATE(CFS) = 35.96 Tc(MIN.) = 18.94  
 EFFECTIVE AREA(ACRES) = 25.40 AREA-AVERAGED Fm(INCH/HR) = 0.34  
 AREA-AVERAGED Fp(INCH/HR) = 0.68 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 26.38  
 LONGEST FLOWPATH FROM NODE 20.00 TO NODE 39.00 = 2005.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 39.00 TO NODE 69.00 IS CODE = 31

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

ELEVATION DATA: UPSTREAM(FEET) = 751.00 DOWNSTREAM(FEET) = 746.50  
 FLOW LENGTH(FEET) = 170.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 27.0 INCH PIPE IS 17.2 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 13.49  
 ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 35.96  
 PIPE TRAVEL TIME(MIN.) = 0.21 Tc(MIN.) = 19.15  
 LONGEST FLOWPATH FROM NODE 20.00 TO NODE 69.00 = 2175.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 69.00 TO NODE 69.00 IS CODE = 11

>>>>CONFLUENCE MEMORY BANK # 3 WITH THE MAIN-STREAM MEMORY<<<<<

\*\* MAIN STREAM CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	35.96	19.15	1.815	0.68( 0.34)	0.50	25.4	24.00
2	35.92	19.46	1.798	0.68( 0.34)	0.50	25.7	30.00
3	32.97	22.53	1.647	0.68( 0.34)	0.50	26.4	20.00

LONGEST FLOWPATH FROM NODE 20.00 TO NODE 69.00 = 2175.00 FEET.

\*\* MEMORY BANK # 3 CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	50.84	10.77	2.564	0.79( 0.39)	0.49	24.0	60.00
2	50.88	10.81	2.559	0.79( 0.39)	0.49	24.0	63.00
3	54.55	17.65	1.907	0.80( 0.39)	0.49	37.3	58.00
4	54.64	18.23	1.870	0.81( 0.39)	0.49	38.3	10.30
5	54.57	18.45	1.857	0.81( 0.40)	0.49	38.6	7.00
6	53.59	20.42	1.747	0.81( 0.40)	0.49	41.0	40.00
7	53.37	20.57	1.740	0.81( 0.40)	0.49	41.1	43.00
8	47.87	23.92	1.589	0.81( 0.39)	0.49	41.6	1.00

LONGEST FLOWPATH FROM NODE 1.00 TO NODE 69.00 = 3184.00 FEET.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	81.34	10.77	2.564	0.75( 0.37)	0.50	38.2	60.00
2	81.41	10.81	2.559	0.75( 0.37)	0.50	38.4	63.00
3	89.74	17.65	1.907	0.76( 0.37)	0.49	60.7	58.00
4	90.14	18.23	1.870	0.76( 0.37)	0.49	62.5	10.30
5	90.18	18.45	1.857	0.76( 0.37)	0.49	63.1	7.00
6	90.19	19.15	1.815	0.76( 0.37)	0.49	64.9	24.00
7	89.99	19.46	1.798	0.76( 0.37)	0.49	65.5	30.00
8	88.58	20.42	1.747	0.76( 0.38)	0.49	66.9	40.00
9	88.22	20.57	1.740	0.76( 0.38)	0.49	67.0	43.00
10	83.12	22.53	1.647	0.76( 0.37)	0.49	67.8	20.00
11	79.37	23.92	1.589	0.76( 0.37)	0.49	68.0	1.00

TOTAL AREA(ACRES) = 68.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 90.19 Tc(MIN.) = 19.155  
EFFECTIVE AREA(ACRES) = 64.86 AREA-AVERAGED Fm(INCH/HR) = 0.37  
AREA-AVERAGED Fp(INCH/HR) = 0.75 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 68.00  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 69.00 = 3184.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 69.00 TO NODE 70.00 IS CODE = 31

-----  
-

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 746.50 DOWNSTREAM(FEET) = 744.50  
FLOW LENGTH(FEET) = 490.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 51.0 INCH PIPE IS 36.4 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 8.33  
ESTIMATED PIPE DIAMETER(INCH) = 51.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 90.19  
PIPE TRAVEL TIME(MIN.) = 0.98 Tc(MIN.) = 20.13  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 70.00 = 3674.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 70.00 TO NODE 70.00 IS CODE = 1

-----  
-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 20.13  
RAINFALL INTENSITY(INCH/HR) = 1.76  
AREA-AVERAGED Fm(INCH/HR) = 0.37  
AREA-AVERAGED Fp(INCH/HR) = 0.76  
AREA-AVERAGED Ap = 0.49  
EFFECTIVE STREAM AREA(ACRES) = 64.86  
TOTAL STREAM AREA(ACRES) = 68.00  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 90.19

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 70.10 TO NODE 70.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

```
=====
=
INITIAL SUBAREA FLOW-LENGTH(FEET) = 928.00
ELEVATION DATA: UPSTREAM(FEET) = 766.30 DOWNSTREAM(FEET) = 755.80
```

```
Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 11.459
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.471
SUBAREA Tc AND LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap        SCS  Tc
LAND USE              GROUP   (ACRES)  (INCH/HR) (DECIMAL) CN
```

```
(MIN.)
RESIDENTIAL
"5-7 DWELLINGS/ACRE"      C      0.64      0.57      0.50      69
14.66
COMMERCIAL                 C      2.98      0.57      0.10      69
11.46
```

```
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.17
SUBAREA RUNOFF(CFS) = 7.74
TOTAL AREA(ACRES) = 3.62 PEAK FLOW RATE(CFS) = 7.74
```

```
*****
*
FLOW PROCESS FROM NODE 70.00 TO NODE 70.00 IS CODE = 81
```

```
-----
-
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
```

```
=====
=
MAINLINE Tc(MIN) = 11.46
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.471
SUBAREA LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap        SCS
LAND USE              GROUP   (ACRES)  (INCH/HR) (DECIMAL) CN
PUBLIC PARK           C      1.07      0.57      0.85      69
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.85
SUBAREA AREA(ACRES) = 1.07 SUBAREA RUNOFF(CFS) = 1.92
EFFECTIVE AREA(ACRES) = 4.69 AREA-AVERAGED Fm(INCH/HR) = 0.18
AREA-AVERAGED Fp(INCH/HR) = 0.57 AREA-AVERAGED Ap = 0.33
TOTAL AREA(ACRES) = 4.69 PEAK FLOW RATE(CFS) = 9.65
```

```
*****
*
FLOW PROCESS FROM NODE 70.00 TO NODE 70.00 IS CODE = 1
```

```
-----
-
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<
```

```
=====
=
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:
TIME OF CONCENTRATION(MIN.) = 11.46
RAINFALL INTENSITY(INCH/HR) = 2.47
```

AREA-AVERAGED Fm(INCH/HR) = 0.18  
 AREA-AVERAGED Fp(INCH/HR) = 0.57  
 AREA-AVERAGED Ap = 0.33  
 EFFECTIVE STREAM AREA(ACRES) = 4.69  
 TOTAL STREAM AREA(ACRES) = 4.69  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 9.65

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	81.34	11.78	2.430	0.75( 0.37)	0.50	38.2	60.00
1	81.41	11.82	2.425	0.75( 0.37)	0.50	38.4	63.00
1	89.74	18.63	1.846	0.76( 0.37)	0.49	60.7	58.00
1	90.14	19.21	1.812	0.76( 0.37)	0.49	62.5	10.30
1	90.18	19.43	1.800	0.76( 0.37)	0.49	63.1	7.00
1	90.19	20.13	1.762	0.76( 0.37)	0.49	64.9	24.00
1	89.99	20.44	1.746	0.76( 0.37)	0.49	65.5	30.00
1	88.58	21.43	1.697	0.76( 0.38)	0.49	66.9	40.00
1	88.22	21.57	1.690	0.76( 0.38)	0.49	67.0	43.00
1	83.12	23.54	1.604	0.76( 0.37)	0.49	67.8	20.00
1	79.37	24.93	1.550	0.76( 0.37)	0.49	68.0	1.00
2	9.65	11.46	2.471	0.57( 0.18)	0.33	4.7	70.10

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	90.33	11.46	2.471	0.73( 0.35)	0.48	41.9	70.10
2	90.82	11.78	2.430	0.73( 0.35)	0.48	42.9	60.00
3	90.87	11.82	2.425	0.73( 0.35)	0.48	43.1	63.00
4	96.75	18.63	1.846	0.75( 0.36)	0.48	65.4	58.00
5	97.01	19.21	1.812	0.75( 0.36)	0.48	67.2	10.30
6	97.00	19.43	1.800	0.75( 0.36)	0.48	67.8	7.00
7	96.84	20.13	1.762	0.75( 0.36)	0.48	69.5	24.00
8	96.58	20.44	1.746	0.75( 0.36)	0.48	70.2	30.00
9	94.97	21.43	1.697	0.75( 0.36)	0.48	71.6	40.00
10	94.58	21.57	1.690	0.75( 0.36)	0.48	71.7	43.00
11	89.12	23.54	1.604	0.75( 0.36)	0.48	72.5	20.00
12	85.13	24.93	1.550	0.75( 0.36)	0.48	72.7	1.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 97.01      Tc(MIN.) = 19.21  
 EFFECTIVE AREA(ACRES) = 67.16      AREA-AVERAGED Fm(INCH/HR) = 0.36  
 AREA-AVERAGED Fp(INCH/HR) = 0.75      AREA-AVERAGED Ap = 0.48  
 TOTAL AREA(ACRES) = 72.69  
 LONGEST FLOWPATH FROM NODE 1.00 TO NODE 70.00 = 3674.00 FEET.





\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 100.00 TO NODE 102.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 960.00  
ELEVATION DATA: UPSTREAM(FEET) = 764.00 DOWNSTREAM(FEET) = 755.70

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 16.613  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.977

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
-------------------------------	-------------------	-----------------	--------------------	--------------------	-----------	-----------------

RESIDENTIAL "3-4 DWELLINGS/ACRE"	A	2.32	0.98	0.60	32	16.61
-------------------------------------	---	------	------	------	----	-------

16.61

RESIDENTIAL "3-4 DWELLINGS/ACRE"	C	5.06	0.57	0.60	69	16.61
-------------------------------------	---	------	------	------	----	-------

16.61

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.69

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.60

SUBAREA RUNOFF(CFS) = 10.37

TOTAL AREA(ACRES) = 7.38 PEAK FLOW RATE(CFS) = 10.37

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 102.00 TO NODE 102.00 IS CODE = 81

-----  
-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE  $T_c$ (MIN) = 16.61  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.977

SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN
-------------------------------	-------------------	-----------------	--------------------	--------------------	-----------

RESIDENTIAL "3-4 DWELLINGS/ACRE"	A	2.14	0.98	0.60	32
-------------------------------------	---	------	------	------	----

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.98

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.60

SUBAREA AREA(ACRES) = 2.14 SUBAREA RUNOFF(CFS) = 2.68

EFFECTIVE AREA(ACRES) = 9.52 AREA-AVERAGED  $F_m$ (INCH/HR) = 0.45

AREA-AVERAGED  $F_p$ (INCH/HR) = 0.76 AREA-AVERAGED  $A_p$  = 0.60

TOTAL AREA(ACRES) = 9.52 PEAK FLOW RATE(CFS) = 13.05

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 102.00 TO NODE 103.00 IS CODE = 31

-----  
-  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 748.70 DOWNSTREAM(FEET) = 746.80  
FLOW LENGTH(FEET) = 480.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 24.0 INCH PIPE IS 18.5 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.02  
ESTIMATED PIPE DIAMETER(INCH) = 24.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 13.05  
PIPE TRAVEL TIME(MIN.) = 1.59 Tc(MIN.) = 18.21  
LONGEST FLOWPATH FROM NODE 100.00 TO NODE 103.00 = 1440.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 103.00 TO NODE 103.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 18.21  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.872  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.44 0.98 0.50 32  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 1.82 0.57 0.50 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.75  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 3.26 SUBAREA RUNOFF(CFS) = 4.40  
EFFECTIVE AREA(ACRES) = 12.78 AREA-AVERAGED Fm(INCH/HR) = 0.43  
AREA-AVERAGED Fp(INCH/HR) = 0.76 AREA-AVERAGED Ap = 0.57  
TOTAL AREA(ACRES) = 12.78 PEAK FLOW RATE(CFS) = 16.54

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 103.00 TO NODE 109.00 IS CODE = 31

-----  
-  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 746.80 DOWNSTREAM(FEET) = 745.90  
FLOW LENGTH(FEET) = 230.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 27.0 INCH PIPE IS 19.6 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.36  
ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 16.54

PIPE TRAVEL TIME(MIN.) = 0.72 Tc(MIN.) = 18.92  
LONGEST FLOWPATH FROM NODE 100.00 TO NODE 109.00 = 1670.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 109.00 TO NODE 109.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====  
=  
MAINLINE Tc(MIN) = 18.92  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.829  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.81 0.98 0.50 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 1.81 SUBAREA RUNOFF(CFS) = 2.18  
EFFECTIVE AREA(ACRES) = 14.59 AREA-AVERAGED Fm(INCH/HR) = 0.44  
AREA-AVERAGED Fp(INCH/HR) = 0.78 AREA-AVERAGED Ap = 0.57  
TOTAL AREA(ACRES) = 14.59 PEAK FLOW RATE(CFS) = 18.23

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 109.00 TO NODE 109.00 IS CODE = 1

-----  
-  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 18.92  
RAINFALL INTENSITY(INCH/HR) = 1.83  
AREA-AVERAGED Fm(INCH/HR) = 0.44  
AREA-AVERAGED Fp(INCH/HR) = 0.78  
AREA-AVERAGED Ap = 0.57  
EFFECTIVE STREAM AREA(ACRES) = 14.59  
TOTAL STREAM AREA(ACRES) = 14.59  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 18.23

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 104.00 TO NODE 105.00 IS CODE = 21

-----  
-  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 710.00  
ELEVATION DATA: UPSTREAM(FEET) = 761.80 DOWNSTREAM(FEET) = 756.60

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$

SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 15.221

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.084

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$
RESIDENTIAL "3-4 DWELLINGS/ACRE"	C	2.45	0.57	0.60	69	15.22

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.57

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.60

SUBAREA RUNOFF(CFS) = 3.85

TOTAL AREA(ACRES) = 2.45 PEAK FLOW RATE(CFS) = 3.85

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 105.00 TO NODE 109.00 IS CODE = 62

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<<

=

UPSTREAM ELEVATION(FEET) = 756.60 DOWNSTREAM ELEVATION(FEET) = 753.00  
STREET LENGTH(FEET) = 600.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00

INSIDE STREET CROSSFALL(DECIMAL) = 0.020

OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2

Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 6.11

STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:

STREET FLOW DEPTH(FEET) = 0.39

HALFSTREET FLOOD WIDTH(FEET) = 11.72

AVERAGE FLOW VELOCITY(FEET/SEC.) = 1.96

PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.77

STREET FLOW TRAVEL TIME(MIN.) = 5.11  $T_c$ (MIN.) = 20.33

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.752

SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN
RESIDENTIAL "3-4 DWELLINGS/ACRE"	A	2.55	0.98	0.60	32
RESIDENTIAL "3-4 DWELLINGS/ACRE"	C	1.44	0.57	0.60	69

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.83

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.60

SUBAREA AREA(ACRES) = 3.99 SUBAREA RUNOFF(CFS) = 4.51

EFFECTIVE AREA(ACRES) = 6.44 AREA-AVERAGED  $F_m$ (INCH/HR) = 0.44

AREA-AVERAGED  $F_p$ (INCH/HR) = 0.73 AREA-AVERAGED  $A_p$  = 0.60

TOTAL AREA(ACRES) = 6.44 PEAK FLOW RATE(CFS) = 7.62

END OF SUBAREA STREET FLOW HYDRAULICS:

DEPTH(FEET) = 0.42 HALFSTREET FLOOD WIDTH(FEET) = 12.91  
FLOW VELOCITY(FEET/SEC.) = 2.05 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.86  
LONGEST FLOWPATH FROM NODE 104.00 TO NODE 109.00 = 1310.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 109.00 TO NODE 109.00 IS CODE = 1

-----  
-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 20.33  
RAINFALL INTENSITY(INCH/HR) = 1.75  
AREA-AVERAGED Fm(INCH/HR) = 0.44  
AREA-AVERAGED Fp(INCH/HR) = 0.73  
AREA-AVERAGED Ap = 0.60  
EFFECTIVE STREAM AREA(ACRES) = 6.44  
TOTAL STREAM AREA(ACRES) = 6.44  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 7.62

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	18.23	18.92	1.829	0.78( 0.44)	0.57	14.6	100.00
2	7.62	20.33	1.752	0.73( 0.44)	0.60	6.4	104.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	25.74	18.92	1.829	0.76( 0.44)	0.58	20.6	100.00
2	24.84	20.33	1.752	0.76( 0.44)	0.58	21.0	104.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 25.74 Tc(MIN.) = 18.92  
EFFECTIVE AREA(ACRES) = 20.58 AREA-AVERAGED Fm(INCH/HR) = 0.44  
AREA-AVERAGED Fp(INCH/HR) = 0.76 AREA-AVERAGED Ap = 0.58  
TOTAL AREA(ACRES) = 21.03  
LONGEST FLOWPATH FROM NODE 100.00 TO NODE 109.00 = 1670.00 FEET.

+-----  
+  
| South-East Area  
|  
|  
|  
|

+-----+  
+  
\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 200.00 TO NODE 202.00 IS CODE = 21

-----  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 810.00  
ELEVATION DATA: UPSTREAM(FEET) = 764.00 DOWNSTREAM(FEET) = 757.70

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 14.968  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.105

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ LAND USE SCS SOIL GROUP AREA (ACRES)  $F_p$  (INCH/HR)  $A_p$  (DECIMAL) SCS CN  $T_c$  (MIN.)

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	4.60	0.98	0.50	32	14.97
RESIDENTIAL "5-7 DWELLINGS/ACRE"	C	4.60	0.57	0.50	69	14.97

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.77  
SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.50  
SUBAREA RUNOFF(CFS) = 14.24  
TOTAL AREA(ACRES) = 9.20 PEAK FLOW RATE(CFS) = 14.24

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 202.00 TO NODE 203.00 IS CODE = 31

-----  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=

ELEVATION DATA: UPSTREAM(FEET) = 750.70 DOWNSTREAM(FEET) = 748.70  
FLOW LENGTH(FEET) = 250.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 24.0 INCH PIPE IS 15.1 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.84  
ESTIMATED PIPE DIAMETER(INCH) = 24.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 14.24  
PIPE TRAVEL TIME(MIN.) = 0.61  $T_c$ (MIN.) = 15.58  
LONGEST FLOWPATH FROM NODE 200.00 TO NODE 203.00 = 1060.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 203.00 TO NODE 203.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 15.58  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.055  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"3-4 DWELLINGS/ACRE" A 1.38 0.98 0.60 32  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 0.70 0.57 0.50 69  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.85  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.57  
SUBAREA AREA(ACRES) = 2.08 SUBAREA RUNOFF(CFS) = 2.94  
EFFECTIVE AREA(ACRES) = 11.28 AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.79 AREA-AVERAGED Ap = 0.51  
TOTAL AREA(ACRES) = 11.28 PEAK FLOW RATE(CFS) = 16.77

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 203.00 TO NODE 207.00 IS CODE = 31

-----  
-  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 748.70 DOWNSTREAM(FEET) = 747.80  
FLOW LENGTH(FEET) = 210.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 27.0 INCH PIPE IS 19.1 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.58  
ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 16.77  
PIPE TRAVEL TIME(MIN.) = 0.63 Tc(MIN.) = 16.21  
LONGEST FLOWPATH FROM NODE 200.00 TO NODE 207.00 = 1270.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 207.00 TO NODE 207.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 16.21  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.007  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 2.64 0.98 0.50 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p = 0.50$   
SUBAREA AREA(ACRES) = 2.64 SUBAREA RUNOFF(CFS) = 3.61  
EFFECTIVE AREA(ACRES) = 13.92 AREA-AVERAGED  $F_m$ (INCH/HR) = 0.42  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.82 AREA-AVERAGED  $A_p = 0.51$   
TOTAL AREA(ACRES) = 13.92 PEAK FLOW RATE(CFS) = 19.89

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 207.00 TO NODE 207.10 IS CODE = 31

-----  
->>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 747.80 DOWNSTREAM(FEET) = 745.90  
FLOW LENGTH(FEET) = 320.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 27.0 INCH PIPE IS 19.2 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.57  
ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 19.89  
PIPE TRAVEL TIME(MIN.) = 0.81  $T_c$ (MIN.) = 17.02  
LONGEST FLOWPATH FROM NODE 200.00 TO NODE 207.10 = 1590.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 207.10 TO NODE 207.10 IS CODE = 1

-----  
->>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====  
=  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 17.02  
RAINFALL INTENSITY(INCH/HR) = 1.95  
AREA-AVERAGED  $F_m$ (INCH/HR) = 0.42  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.82  
AREA-AVERAGED  $A_p = 0.51$   
EFFECTIVE STREAM AREA(ACRES) = 13.92  
TOTAL STREAM AREA(ACRES) = 13.92  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 19.89

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 204.00 TO NODE 204.10 IS CODE = 21

-----  
->>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
=  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 900.00



ELEVATION DATA: UPSTREAM(FEET) = 761.20 DOWNSTREAM(FEET) = 754.20

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20

SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 15.613

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.052

SUBAREA Tc AND LOSS RATE DATA(AMC II):

(MIN.)	DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc
	RESIDENTIAL						
15.61	"5-7 DWELLINGS/ACRE"	A	2.70	0.98	0.50	32	
15.61	RESIDENTIAL						
15.61	"5-7 DWELLINGS/ACRE"	C	0.70	0.57	0.50	69	

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.89

SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50

SUBAREA RUNOFF(CFS) = 4.92

TOTAL AREA(ACRES) = 3.40 PEAK FLOW RATE(CFS) = 4.92

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 204.10 TO NODE 207.10 IS CODE = 62

>>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>>(STREET TABLE SECTION # 1 USED)<<<<<

=====

UPSTREAM ELEVATION(FEET) = 754.20 DOWNSTREAM ELEVATION(FEET) = 752.90  
STREET LENGTH(FEET) = 200.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 5.53  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.38  
HALFSTREET FLOOD WIDTH(FEET) = 11.03  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 1.97  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.75  
STREET FLOW TRAVEL TIME(MIN.) = 1.69 Tc(MIN.) = 17.31

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.929

SUBAREA LOSS RATE DATA(AMC II):

	DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc
	RESIDENTIAL						
	"5-7 DWELLINGS/ACRE"	C	0.83	0.57	0.50	69	
	SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57						
	SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50						
	SUBAREA AREA(ACRES) = 0.83			SUBAREA RUNOFF(CFS) = 1.23			
	EFFECTIVE AREA(ACRES) = 4.23		AREA-AVERAGED Fm(INCH/HR) = 0.41				
	AREA-AVERAGED Fp(INCH/HR) = 0.83			AREA-AVERAGED Ap = 0.50			

TOTAL AREA(ACRES) = 4.23 PEAK FLOW RATE(CFS) = 5.77

END OF SUBAREA STREET FLOW HYDRAULICS:

DEPTH(FEET) = 0.38 HALFSTREET FLOOD WIDTH(FEET) = 11.22  
FLOW VELOCITY(FEET/SEC.) = 1.99 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.76  
LONGEST FLOWPATH FROM NODE 204.00 TO NODE 207.10 = 1100.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 207.10 TO NODE 207.10 IS CODE = 1

-----

-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 17.31  
RAINFALL INTENSITY(INCH/HR) = 1.93  
AREA-AVERAGED Fm(INCH/HR) = 0.41  
AREA-AVERAGED Fp(INCH/HR) = 0.83  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 4.23  
TOTAL STREAM AREA(ACRES) = 4.23  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 5.77

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	19.89	17.02	1.949	0.82( 0.42)	0.51	13.9	200.00
2	5.77	17.31	1.929	0.83( 0.41)	0.50	4.2	204.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	25.64	17.02	1.949	0.82( 0.42)	0.51	18.1	200.00
2	25.40	17.31	1.929	0.82( 0.42)	0.51	18.1	204.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 25.64 Tc(MIN.) = 17.02  
EFFECTIVE AREA(ACRES) = 18.08 AREA-AVERAGED Fm(INCH/HR) = 0.42  
AREA-AVERAGED Fp(INCH/HR) = 0.82 AREA-AVERAGED Ap = 0.51  
TOTAL AREA(ACRES) = 18.15  
LONGEST FLOWPATH FROM NODE 200.00 TO NODE 207.10 = 1590.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 207.10 TO NODE 220.00 IS CODE = 81

-----

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

```

=
MAINLINE Tc(MIN) = 17.02
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.949
SUBAREA LOSS RATE DATA(AMC II):
  DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap        SCS
    LAND USE              GROUP   (ACRES)  (INCH/HR) (DECIMAL) CN
RESIDENTIAL
"3-4 DWELLINGS/ACRE"    A         3.79     0.98     0.60     32
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60
SUBAREA AREA(ACRES) = 3.79      SUBAREA RUNOFF(CFS) = 4.65
EFFECTIVE AREA(ACRES) = 21.87   AREA-AVERAGED Fm(INCH/HR) = 0.45
AREA-AVERAGED Fp(INCH/HR) = 0.85 AREA-AVERAGED Ap = 0.52
TOTAL AREA(ACRES) = 21.94      PEAK FLOW RATE(CFS) = 29.56

```

```

*****
*
FLOW PROCESS FROM NODE 220.00 TO NODE 220.00 IS CODE = 1

```

```

-----
-
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

```

```

=====
=
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:
TIME OF CONCENTRATION(MIN.) = 17.02
RAINFALL INTENSITY(INCH/HR) = 1.95
AREA-AVERAGED Fm(INCH/HR) = 0.45
AREA-AVERAGED Fp(INCH/HR) = 0.85
AREA-AVERAGED Ap = 0.52
EFFECTIVE STREAM AREA(ACRES) = 21.87
TOTAL STREAM AREA(ACRES) = 21.94
PEAK FLOW RATE(CFS) AT CONFLUENCE = 29.56

```

```

*****
*
FLOW PROCESS FROM NODE 217.00 TO NODE 218.00 IS CODE = 21

```

```

-----
-
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

```

```

=====
=
INITIAL SUBAREA FLOW-LENGTH(FEET) = 995.00
ELEVATION DATA: UPSTREAM(FEET) = 764.30 DOWNSTREAM(FEET) = 756.50

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.226
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.005
SUBAREA Tc AND LOSS RATE DATA(AMC II):
  DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap        SCS   Tc
    LAND USE              GROUP   (ACRES)  (INCH/HR) (DECIMAL) CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE"    A         1.71     0.98     0.50     32
16.23

```

RESIDENTIAL  
 "5-7 DWELLINGS/ACRE" C 1.30 0.57 0.50 69  
 16.23  
 SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.50  
 SUBAREA RUNOFF(CFS) = 4.35  
 TOTAL AREA(ACRES) = 3.01 PEAK FLOW RATE(CFS) = 4.35

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 218.00 TO NODE 220.00 IS CODE = 62

-----  
 -  
 >>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<  
 >>>>(STREET TABLE SECTION # 1 USED)<<<<

=====  
 =  
 UPSTREAM ELEVATION(FEET) = 756.50 DOWNSTREAM ELEVATION(FEET) = 750.70  
 STREET LENGTH(FEET) = 835.00 CURB HEIGHT(INCHES) = 6.0  
 STREET HALFWIDTH(FEET) = 18.00  
  
 DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
 INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
 OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020  
  
 SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
 Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curb) =  
 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 7.18  
 STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
 STREET FLOW DEPTH(FEET) = 0.40  
 HALFSTREET FLOOD WIDTH(FEET) = 12.16  
 AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.15  
 PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.86  
 STREET FLOW TRAVEL TIME(MIN.) = 6.46  $T_c$ (MIN.) = 22.69  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.640

SUBAREA LOSS RATE DATA(AMC II):  

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN
RESIDENTIAL "3-4 DWELLINGS/ACRE"	A	5.90	0.98	0.60	32
SUBAREA AVERAGE PERVIOUS LOSS RATE, $F_p$ (INCH/HR) = 0.98					
SUBAREA AVERAGE PERVIOUS AREA FRACTION, $A_p$ = 0.60					
SUBAREA AREA(ACRES) = 5.90		SUBAREA RUNOFF(CFS) = 5.60			
EFFECTIVE AREA(ACRES) = 8.91		AREA-AVERAGED $F_m$ (INCH/HR) = 0.52			
AREA-AVERAGED $F_p$ (INCH/HR) = 0.92		AREA-AVERAGED $A_p$ = 0.57			
TOTAL AREA(ACRES) = 8.91		PEAK FLOW RATE(CFS) = 8.96			

END OF SUBAREA STREET FLOW HYDRAULICS:  
 DEPTH(FEET) = 0.43 HALFSTREET FLOOD WIDTH(FEET) = 13.41  
 FLOW VELOCITY(FEET/SEC.) = 2.26 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.96  
 LONGEST FLOWPATH FROM NODE 217.00 TO NODE 220.00 = 1830.00 FEET.

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 220.00 TO NODE 220.00 IS CODE = 1

-----  
 -  
 >>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
 =  
 TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 22.69  
 RAINFALL INTENSITY(INCH/HR) = 1.64  
 AREA-AVERAGED Fm(INCH/HR) = 0.52  
 AREA-AVERAGED Fp(INCH/HR) = 0.92  
 AREA-AVERAGED Ap = 0.57  
 EFFECTIVE STREAM AREA(ACRES) = 8.91  
 TOTAL STREAM AREA(ACRES) = 8.91  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 8.96

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	29.56	17.02	1.949	0.85( 0.45)	0.52	21.9	200.00
1	29.27	17.31	1.929	0.85( 0.45)	0.52	21.9	204.00
2	8.96	22.69	1.640	0.92( 0.52)	0.57	8.9	217.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	38.15	17.02	1.949	0.87( 0.46)	0.53	28.6	200.00
2	37.88	17.31	1.929	0.87( 0.46)	0.53	28.7	204.00
3	32.53	22.69	1.640	0.87( 0.47)	0.54	30.8	217.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
 PEAK FLOW RATE(CFS) = 38.15 Tc(MIN.) = 17.02  
 EFFECTIVE AREA(ACRES) = 28.55 AREA-AVERAGED Fm(INCH/HR) = 0.46  
 AREA-AVERAGED Fp(INCH/HR) = 0.87 AREA-AVERAGED Ap = 0.53  
 TOTAL AREA(ACRES) = 30.85  
 LONGEST FLOWPATH FROM NODE 217.00 TO NODE 220.00 = 1830.00 FEET.

+-----  
 +  
 | North-East Area  
 |  
 |  
 |  
 |  
 |  
 +-----  
 +

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 308.00 TO NODE 309.00 IS CODE = 21  
 -----  
 -

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=  
 INITIAL SUBAREA FLOW-LENGTH(FEET) = 830.00  
 ELEVATION DATA: UPSTREAM(FEET) = 774.10 DOWNSTREAM(FEET) = 767.10

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
 SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 14.872  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.113

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	3.73	0.98	0.50	32	14.87

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.98

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.50

SUBAREA RUNOFF(CFS) = 5.46

TOTAL AREA(ACRES) = 3.73 PEAK FLOW RATE(CFS) = 5.46

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 309.00 TO NODE 310.00 IS CODE = 62

-----

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>(STREET TABLE SECTION # 1 USED)<<<<<

=====

=  
 UPSTREAM ELEVATION(FEET) = 767.10 DOWNSTREAM ELEVATION(FEET) = 763.50  
 STREET LENGTH(FEET) = 600.00 CURB HEIGHT(INCHES) = 6.0  
 STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
 INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
 OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2

Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) =  
 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 6.98

STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:

STREET FLOW DEPTH(FEET) = 0.41

HALFSTREET FLOOD WIDTH(FEET) = 12.41

AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.02

PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.82

STREET FLOW TRAVEL TIME(MIN.) = 4.95  $T_c$ (MIN.) = 19.82

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.778

SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	2.62	0.98	0.50	32

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.97  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.50

SUBAREA AREA(ACRES) = 2.62 SUBAREA RUNOFF(CFS) = 3.04  
 EFFECTIVE AREA(ACRES) = 6.35 AREA-AVERAGED Fm(INCH/HR) = 0.49  
 AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 6.35 PEAK FLOW RATE(CFS) = 7.38

END OF SUBAREA STREET FLOW HYDRAULICS:

DEPTH(FEET) = 0.41 HALFSTREET FLOOD WIDTH(FEET) = 12.72  
 FLOW VELOCITY(FEET/SEC.) = 2.04 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.84  
 LONGEST FLOWPATH FROM NODE 308.00 TO NODE 310.00 = 1430.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 310.00 TO NODE 310.00 IS CODE = 81

-----

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====

=

MAINLINE Tc(MIN) = 19.82  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.778  
 SUBAREA LOSS RATE DATA(AMC II):  
 DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
 LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
 RESIDENTIAL  
 "5-7 DWELLINGS/ACRE" A 3.75 0.98 0.50 32  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA AREA(ACRES) = 3.75 SUBAREA RUNOFF(CFS) = 4.36  
 EFFECTIVE AREA(ACRES) = 10.10 AREA-AVERAGED Fm(INCH/HR) = 0.49  
 AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 10.10 PEAK FLOW RATE(CFS) = 11.73

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 310.00 TO NODE 310.00 IS CODE = 81

-----

-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====

=

MAINLINE Tc(MIN) = 19.82  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.778  
 SUBAREA LOSS RATE DATA(AMC II):  
 DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
 LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
 RESIDENTIAL  
 "5-7 DWELLINGS/ACRE" A 0.93 0.98 0.50 32  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA AREA(ACRES) = 0.93 SUBAREA RUNOFF(CFS) = 1.08  
 EFFECTIVE AREA(ACRES) = 11.03 AREA-AVERAGED Fm(INCH/HR) = 0.49  
 AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 11.03 PEAK FLOW RATE(CFS) = 12.81

\*\*\*\*\*

```

*
FLOW PROCESS FROM NODE      310.00 TO NODE      313.00 IS CODE = 31
-----
-
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
=====
=
ELEVATION DATA: UPSTREAM(FEET) = 756.50 DOWNSTREAM(FEET) = 755.20
FLOW LENGTH(FEET) = 330.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 24.0 INCH PIPE IS 18.2 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.00
ESTIMATED PIPE DIAMETER(INCH) = 24.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 12.81
PIPE TRAVEL TIME(MIN.) = 1.10 Tc(MIN.) = 20.92
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 313.00 = 1760.00 FEET.

*****
*
FLOW PROCESS FROM NODE      313.00 TO NODE      313.00 IS CODE = 81
-----
-
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
=
MAINLINE Tc(MIN) = 20.92
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.722
SUBAREA LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap        SCS
LAND USE              GROUP  (ACRES)  (INCH/HR) (DECIMAL) CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE"  A      3.87     0.98     0.50     32
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.97
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA AREA(ACRES) = 3.87 SUBAREA RUNOFF(CFS) = 4.30
EFFECTIVE AREA(ACRES) = 14.90 AREA-AVERAGED Fm(INCH/HR) = 0.49
AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.50
TOTAL AREA(ACRES) = 14.90 PEAK FLOW RATE(CFS) = 16.55

*****
*
FLOW PROCESS FROM NODE      313.00 TO NODE      317.00 IS CODE = 31
-----
-
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
=====
=
ELEVATION DATA: UPSTREAM(FEET) = 755.20 DOWNSTREAM(FEET) = 754.40
FLOW LENGTH(FEET) = 250.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 27.0 INCH PIPE IS 21.4 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 4.89
ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 16.55

```



PIPE TRAVEL TIME(MIN.) = 0.85 Tc(MIN.) = 21.78  
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 317.00 = 2010.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 317.00 TO NODE 317.00 IS CODE = 1

-----  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 21.78  
RAINFALL INTENSITY(INCH/HR) = 1.68  
AREA-AVERAGED Fm(INCH/HR) = 0.49  
AREA-AVERAGED Fp(INCH/HR) = 0.97  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 14.90  
TOTAL STREAM AREA(ACRES) = 14.90  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 16.55

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 315.00 TO NODE 316.00 IS CODE = 21

-----  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

INITIAL SUBAREA FLOW-LENGTH(FEET) = 665.00  
ELEVATION DATA: UPSTREAM(FEET) = 774.10 DOWNSTREAM(FEET) = 767.70

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 13.256  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.264

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	2.32	0.98	0.50	32	13.26

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98

SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50

SUBAREA RUNOFF(CFS) = 3.71

TOTAL AREA(ACRES) = 2.32 PEAK FLOW RATE(CFS) = 3.71

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 316.00 TO NODE 317.00 IS CODE = 62

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<<

=====  
=

UPSTREAM ELEVATION(FEET) = 767.70 DOWNSTREAM ELEVATION(FEET) = 763.70  
STREET LENGTH(FEET) = 550.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) =  
0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 6.86  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.40  
HALFSTREET FLOOD WIDTH(FEET) = 11.84  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.16  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.85  
STREET FLOW TRAVEL TIME(MIN.) = 4.25 Tc(MIN.) = 17.51  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.916

SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	4.88	0.98	0.50	32
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =			0.98		
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =			0.50		
SUBAREA AREA(ACRES) =		4.88	SUBAREA RUNOFF(CFS) =		6.27
EFFECTIVE AREA(ACRES) =		7.20	AREA-AVERAGED Fm(INCH/HR) =		0.49
AREA-AVERAGED Fp(INCH/HR) =		0.98	AREA-AVERAGED Ap =		0.50
TOTAL AREA(ACRES) =		7.20	PEAK FLOW RATE(CFS) =		9.26

END OF SUBAREA STREET FLOW HYDRAULICS:

DEPTH(FEET) = 0.43 HALFSTREET FLOOD WIDTH(FEET) = 13.47  
FLOW VELOCITY(FEET/SEC.) = 2.31 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.99  
LONGEST FLOWPATH FROM NODE 315.00 TO NODE 317.00 = 1215.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 317.00 TO NODE 317.00 IS CODE = 1

-----  
-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====  
=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 17.51  
RAINFALL INTENSITY(INCH/HR) = 1.92  
AREA-AVERAGED Fm(INCH/HR) = 0.49  
AREA-AVERAGED Fp(INCH/HR) = 0.98  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 7.20

TOTAL STREAM AREA(ACRES) = 7.20  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 9.26

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	16.55	21.78	1.681	0.97( 0.49)	0.50	14.9	308.00
2	9.26	17.51	1.916	0.98( 0.49)	0.50	7.2	315.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	25.18	17.51	1.916	0.97( 0.49)	0.50	19.2	315.00
2	24.28	21.78	1.681	0.97( 0.49)	0.50	22.1	308.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 25.18 Tc(MIN.) = 17.51  
 EFFECTIVE AREA(ACRES) = 19.18 AREA-AVERAGED Fm(INCH/HR) = 0.49  
 AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 22.10  
 LONGEST FLOWPATH FROM NODE 308.00 TO NODE 317.00 = 2010.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 317.00 TO NODE 325.00 IS CODE = 31

-----

-

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 763.70 DOWNSTREAM(FEET) = 752.60  
 FLOW LENGTH(FEET) = 445.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 24.0 INCH PIPE IS 15.1 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 12.07  
 ESTIMATED PIPE DIAMETER(INCH) = 24.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 25.18  
 PIPE TRAVEL TIME(MIN.) = 0.61 Tc(MIN.) = 18.12  
 LONGEST FLOWPATH FROM NODE 308.00 TO NODE 325.00 = 2455.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 325.00 TO NODE 325.00 IS CODE = 1

-----

-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
 TIME OF CONCENTRATION(MIN.) = 18.12  
 RAINFALL INTENSITY(INCH/HR) = 1.88  
 AREA-AVERAGED Fm(INCH/HR) = 0.49

AREA-AVERAGED Fp(INCH/HR) = 0.97  
 AREA-AVERAGED Ap = 0.50  
 EFFECTIVE STREAM AREA(ACRES) = 19.18  
 TOTAL STREAM AREA(ACRES) = 22.10  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 25.18

\*\*\*\*\*  
 \*

FLOW PROCESS FROM NODE 320.00 TO NODE 321.00 IS CODE = 21

-----  
 -  
 >>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
 =

INITIAL SUBAREA FLOW-LENGTH(FEET) = 650.00  
 ELEVATION DATA: UPSTREAM(FEET) = 783.80 DOWNSTREAM(FEET) = 778.90

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 10.779  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.563

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
COMMERCIAL	A	1.14	0.98	0.10	32	10.78

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
 SUBAREA RUNOFF(CFS) = 2.53  
 TOTAL AREA(ACRES) = 1.14 PEAK FLOW RATE(CFS) = 2.53

\*\*\*\*\*  
 \*

FLOW PROCESS FROM NODE 321.00 TO NODE 323.00 IS CODE = 62

-----  
 -  
 >>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>(STREET TABLE SECTION # 2 USED)<<<<<

=====  
 =

UPSTREAM ELEVATION(FEET) = 778.90 DOWNSTREAM ELEVATION(FEET) = 778.70  
 STREET LENGTH(FEET) = 395.00 CURB HEIGHT(INCHES) = 8.0  
 STREET HALFWIDTH(FEET) = 32.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 27.00  
 INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
 OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
 Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) =  
 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 3.48  
 STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
 STREET FLOW DEPTH(FEET) = 0.47

HALFSTREET FLOOD WIDTH(FEET) = 15.56  
 AVERAGE FLOW VELOCITY(FEET/SEC.) = 0.67  
 PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.31  
 STREET FLOW TRAVEL TIME(MIN.) = 9.88 Tc(MIN.) = 20.66  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.735  
 SUBAREA LOSS RATE DATA(AMC II):  

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
COMMERCIAL	A	1.28	0.98	0.10	32

 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.97  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
 SUBAREA AREA(ACRES) = 1.28 SUBAREA RUNOFF(CFS) = 1.89  
 EFFECTIVE AREA(ACRES) = 2.42 AREA-AVERAGED Fm(INCH/HR) = 0.10  
 AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.10  
 TOTAL AREA(ACRES) = 2.42 PEAK FLOW RATE(CFS) = 3.57

END OF SUBAREA STREET FLOW HYDRAULICS:  
 DEPTH(FEET) = 0.47 HALFSTREET FLOOD WIDTH(FEET) = 15.74  
 FLOW VELOCITY(FEET/SEC.) = 0.67 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.32  
 LONGEST FLOWPATH FROM NODE 320.00 TO NODE 323.00 = 1045.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 323.00 TO NODE 325.00 IS CODE = 31

-----  
-  
>>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 766.70 DOWNSTREAM(FEET) = 752.60  
 FLOW LENGTH(FEET) = 50.00 MANNING'S N = 0.013  
 ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
 DEPTH OF FLOW IN 18.0 INCH PIPE IS 3.1 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 17.39  
 ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 3.57  
 PIPE TRAVEL TIME(MIN.) = 0.05 Tc(MIN.) = 20.71  
 LONGEST FLOWPATH FROM NODE 320.00 TO NODE 325.00 = 1095.00 FEET.

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 325.00 TO NODE 325.00 IS CODE = 1

-----  
-  
>>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 20.71  
 RAINFALL INTENSITY(INCH/HR) = 1.73  
 AREA-AVERAGED Fm(INCH/HR) = 0.10  
 AREA-AVERAGED Fp(INCH/HR) = 0.97  
 AREA-AVERAGED Ap = 0.10

EFFECTIVE STREAM AREA(ACRES) = 2.42  
 TOTAL STREAM AREA(ACRES) = 2.42  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 3.57

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	25.18	18.12	1.877	0.97( 0.49)	0.50	19.2	315.00
1	24.28	22.42	1.652	0.97( 0.49)	0.50	22.1	308.00
2	3.57	20.71	1.732	0.97( 0.10)	0.10	2.4	320.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	28.58	18.12	1.877	0.98( 0.45)	0.46	21.3	315.00
2	28.21	20.71	1.732	0.97( 0.45)	0.46	23.4	320.00
3	27.67	22.42	1.652	0.97( 0.45)	0.46	24.5	308.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

PEAK FLOW RATE(CFS) = 28.58 Tc(MIN.) = 18.12  
 EFFECTIVE AREA(ACRES) = 21.30 AREA-AVERAGED Fm(INCH/HR) = 0.45  
 AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.46  
 TOTAL AREA(ACRES) = 24.52  
 LONGEST FLOWPATH FROM NODE 308.00 TO NODE 325.00 = 2455.00 FEET.

\*\*\*\*\*  
 \*

FLOW PROCESS FROM NODE 325.00 TO NODE 326.00 IS CODE = 31

-----  
 -  
 >>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

=  
 ELEVATION DATA: UPSTREAM(FEET) = 752.60 DOWNSTREAM(FEET) = 326.00  
 FLOW LENGTH(FEET) = 640.00 MANNING'S N = 0.013  
 ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
 DEPTH OF FLOW IN 18.0 INCH PIPE IS 7.3 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 42.84  
 ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 28.58  
 PIPE TRAVEL TIME(MIN.) = 0.25 Tc(MIN.) = 18.37  
 LONGEST FLOWPATH FROM NODE 308.00 TO NODE 326.00 = 3095.00 FEET.

\*\*\*\*\*  
 \*

FLOW PROCESS FROM NODE 326.00 TO NODE 326.00 IS CODE = 81

-----  
 -  
 >>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=  
 MAINLINE Tc(MIN) = 18.37

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.861  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 13.00 0.98 0.50 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 13.00 SUBAREA RUNOFF(CFS) = 16.08  
EFFECTIVE AREA(ACRES) = 34.30 AREA-AVERAGED Fm(INCH/HR) = 0.46  
AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.48  
TOTAL AREA(ACRES) = 37.52 PEAK FLOW RATE(CFS) = 43.15

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 326.00 TO NODE 326.00 IS CODE = 81

-----  
-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====

=

MAINLINE Tc(MIN) = 18.37  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.861  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 2.00 0.98 0.10 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA AREA(ACRES) = 2.00 SUBAREA RUNOFF(CFS) = 3.18  
EFFECTIVE AREA(ACRES) = 36.30 AREA-AVERAGED Fm(INCH/HR) = 0.44  
AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.45  
TOTAL AREA(ACRES) = 39.52 PEAK FLOW RATE(CFS) = 46.33

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 326.00 TO NODE 327.00 IS CODE = 31

-----  
-

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 750.00 DOWNSTREAM(FEET) = 749.90  
FLOW LENGTH(FEET) = 50.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 45.0 INCH PIPE IS 32.7 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.38  
ESTIMATED PIPE DIAMETER(INCH) = 45.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 46.33  
PIPE TRAVEL TIME(MIN.) = 0.15 Tc(MIN.) = 18.53  
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 327.00 = 3145.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 327.00 TO NODE 327.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====  
=  
MAINLINE Tc(MIN) = 18.53  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.852  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 1.00 0.98 0.10 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA AREA(ACRES) = 1.00 SUBAREA RUNOFF(CFS) = 1.58  
EFFECTIVE AREA(ACRES) = 37.30 AREA-AVERAGED Fm(INCH/HR) = 0.43  
AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.45  
TOTAL AREA(ACRES) = 40.52 PEAK FLOW RATE(CFS) = 47.60

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 327.00 TO NODE 328.00 IS CODE = 31

-----  
-  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 749.90 DOWNSTREAM(FEET) = 746.40  
FLOW LENGTH(FEET) = 860.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 39.0 INCH PIPE IS 29.7 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 7.03  
ESTIMATED PIPE DIAMETER(INCH) = 39.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 47.60  
PIPE TRAVEL TIME(MIN.) = 2.04 Tc(MIN.) = 20.57  
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 328.00 = 4005.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 328.00 TO NODE 328.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====  
=  
MAINLINE Tc(MIN) = 20.57  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.740  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
SCHOOL A 9.70 0.98 0.60 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60  
SUBAREA AREA(ACRES) = 9.70 SUBAREA RUNOFF(CFS) = 10.08  
EFFECTIVE AREA(ACRES) = 47.00 AREA-AVERAGED Fm(INCH/HR) = 0.47



AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.48  
TOTAL AREA(ACRES) = 50.22 PEAK FLOW RATE(CFS) = 53.91

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 328.00 TO NODE 328.00 IS CODE = 81

-----  
-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====

=

MAINLINE Tc(MIN) = 20.57  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.740  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 2.60 0.98 0.10 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA AREA(ACRES) = 2.60 SUBAREA RUNOFF(CFS) = 3.84  
EFFECTIVE AREA(ACRES) = 49.60 AREA-AVERAGED Fm(INCH/HR) = 0.45  
AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.46  
TOTAL AREA(ACRES) = 52.82 PEAK FLOW RATE(CFS) = 57.75

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 328.00 TO NODE 329.00 IS CODE = 31

-----  
-

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<

=====

=

ELEVATION DATA: UPSTREAM(FEET) = 746.40 DOWNSTREAM(FEET) = 746.30  
FLOW LENGTH(FEET) = 50.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 48.0 INCH PIPE IS 36.4 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.66  
ESTIMATED PIPE DIAMETER(INCH) = 48.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 57.75  
PIPE TRAVEL TIME(MIN.) = 0.15 Tc(MIN.) = 20.71  
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 329.00 = 4055.00 FEET.

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 329.00 TO NODE 329.00 IS CODE = 81

-----  
-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====

=

MAINLINE Tc(MIN) = 20.71  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.732  
SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
COMMERCIAL	A	0.95	0.98	0.10	32
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98					
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10					
SUBAREA AREA(ACRES) =		0.95	SUBAREA RUNOFF(CFS) =		1.40
EFFECTIVE AREA(ACRES) =		50.55	AREA-AVERAGED Fm(INCH/HR) =		0.44
AREA-AVERAGED Fp(INCH/HR) =		0.97	AREA-AVERAGED Ap =		0.45
TOTAL AREA(ACRES) =		53.77	PEAK FLOW RATE(CFS) =		58.81

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 329.00 TO NODE 330.00 IS CODE = 31

-----  
-  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====  
=  
ELEVATION DATA: UPSTREAM(FEET) = 746.30 DOWNSTREAM(FEET) = 744.00  
FLOW LENGTH(FEET) = 500.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 42.0 INCH PIPE IS 30.7 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 7.80  
ESTIMATED PIPE DIAMETER(INCH) = 42.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 58.81  
PIPE TRAVEL TIME(MIN.) = 1.07 Tc(MIN.) = 21.78  
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 330.00 = 4555.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 330.00 TO NODE 330.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 21.78  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.681  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 1.65 0.98 0.10 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA AREA(ACRES) = 1.65 SUBAREA RUNOFF(CFS) = 2.35  
EFFECTIVE AREA(ACRES) = 52.20 AREA-AVERAGED Fm(INCH/HR) = 0.43  
AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.44  
TOTAL AREA(ACRES) = 55.42 PEAK FLOW RATE(CFS) = 58.83

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 330.00 TO NODE 330.00 IS CODE = 81

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE Tc(MIN) = 21.78  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.681  
 SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	5.54	0.98	0.50	32

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA AREA(ACRES) = 5.54 SUBAREA RUNOFF(CFS) = 5.95  
 EFFECTIVE AREA(ACRES) = 57.74 AREA-AVERAGED Fm(INCH/HR) = 0.43  
 AREA-AVERAGED Fp(INCH/HR) = 0.97 AREA-AVERAGED Ap = 0.45  
 TOTAL AREA(ACRES) = 60.96 PEAK FLOW RATE(CFS) = 64.77

-----

+  
 | Chino Avenue  
 |  
 |  
 |  
 |  
 |

-----

+

\*\*\*\*\*  
 \*  
 FLOW PROCESS FROM NODE 524.00 TO NODE 522.00 IS CODE = 21

-----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 700.00  
 ELEVATION DATA: UPSTREAM(FEET) = 754.20 DOWNSTREAM(FEET) = 751.40

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 12.604  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.334  
 SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc
COMMERCIAL	A	0.92	0.98	0.10	32	12.60

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
 SUBAREA RUNOFF(CFS) = 1.85  
 TOTAL AREA(ACRES) = 0.92 PEAK FLOW RATE(CFS) = 1.85

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 522.00 TO NODE 522.00 IS CODE = 81

-----  
-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<

=====

MAINLINE Tc(MIN) = 12.60  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.334  
 SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
PUBLIC PARK	A	0.78	0.98	0.85	32

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.85  
 SUBAREA AREA(ACRES) = 0.78 SUBAREA RUNOFF(CFS) = 1.06  
 EFFECTIVE AREA(ACRES) = 1.70 AREA-AVERAGED Fm(INCH/HR) = 0.43  
 AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.44  
 TOTAL AREA(ACRES) = 1.70 PEAK FLOW RATE(CFS) = 2.91

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 522.00 TO NODE 523.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

INITIAL SUBAREA FLOW-LENGTH(FEET) = 820.00  
ELEVATION DATA: UPSTREAM(FEET) = 755.00 DOWNSTREAM(FEET) = 748.20

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 11.605  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.452

SUBAREA Tc AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
COMMERCIAL	A	0.80	0.98	0.10	32	11.61

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.97  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA RUNOFF(CFS) = 1.70  
TOTAL AREA(ACRES) = 0.80 PEAK FLOW RATE(CFS) = 1.70

\*\*\*\*\*  
\*

FLOW PROCESS FROM NODE 523.00 TO NODE 524.00 IS CODE = 62

-----  
-

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<  
>>>>(STREET TABLE SECTION # 2 USED)<<<<

=====

=  
UPSTREAM ELEVATION(FEET) = 748.20 DOWNSTREAM ELEVATION(FEET) = 747.70  
STREET LENGTH(FEET) = 565.00 CURB HEIGHT(INCHES) = 8.0  
STREET HALFWIDTH(FEET) = 32.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 27.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 1  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) =  
0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 2.25  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.47  
HALFSTREET FLOOD WIDTH(FEET) = 15.45  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 0.87  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.41  
STREET FLOW TRAVEL TIME(MIN.) = 10.80 Tc(MIN.) = 22.41  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.652

SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 0.78 0.98 0.10 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.97  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA AREA(ACRES) = 0.78 SUBAREA RUNOFF(CFS) = 1.09  
EFFECTIVE AREA(ACRES) = 1.58 AREA-AVERAGED Fm(INCH/HR) = 0.10  
AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.10  
TOTAL AREA(ACRES) = 1.58 PEAK FLOW RATE(CFS) = 2.21

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.46 HALFSTREET FLOOD WIDTH(FEET) = 15.33  
FLOW VELOCITY(FEET/SEC.) = 0.87 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.40  
LONGEST FLOWPATH FROM NODE 522.00 TO NODE 524.00 = 1385.00 FEET.

\*\*\*\*\*  
\*  
FLOW PROCESS FROM NODE 524.00 TO NODE 524.00 IS CODE = 81

-----  
-  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====  
=  
MAINLINE Tc(MIN) = 22.41  
\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 1.652  
SUBAREA LOSS RATE DATA(AMC II):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
PUBLIC PARK A 1.37 0.98 0.85 32  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.85  
SUBAREA AREA(ACRES) = 1.37 SUBAREA RUNOFF(CFS) = 1.02  
EFFECTIVE AREA(ACRES) = 2.95 AREA-AVERAGED Fm(INCH/HR) = 0.44  
AREA-AVERAGED Fp(INCH/HR) = 0.98 AREA-AVERAGED Ap = 0.45  
TOTAL AREA(ACRES) = 2.95 PEAK FLOW RATE(CFS) = 3.23

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 520.00 TO NODE 518.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 683.00  
ELEVATION DATA: UPSTREAM(FEET) = 758.20 DOWNSTREAM(FEET) = 745.20

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$

SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 9.136

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.831

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
COMMERCIAL	A	0.84	0.98	0.10	32	9.14

9.14

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.98

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.10

SUBAREA RUNOFF(CFS) = 2.07

TOTAL AREA(ACRES) = 0.84 PEAK FLOW RATE(CFS) = 2.07

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 518.00 TO NODE 518.00 IS CODE = 81

-----  
-

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

=

MAINLINE  $T_c$ (MIN) = 9.14

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.831

SUBAREA LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN
PUBLIC PARK	A	0.56	0.98	0.85	32

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.98

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.85

SUBAREA AREA(ACRES) = 0.56 SUBAREA RUNOFF(CFS) = 1.01

EFFECTIVE AREA(ACRES) = 1.40 AREA-AVERAGED  $F_m$ (INCH/HR) = 0.39

AREA-AVERAGED  $F_p$ (INCH/HR) = 0.98 AREA-AVERAGED  $A_p$  = 0.40

TOTAL AREA(ACRES) = 1.40 PEAK FLOW RATE(CFS) = 3.08

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 514.00 TO NODE 516.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

```
=====
=
INITIAL SUBAREA FLOW-LENGTH(FEET) = 705.00
ELEVATION DATA: UPSTREAM(FEET) = 760.00 DOWNSTREAM(FEET) = 745.80
```

```
Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 9.148
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.828
```

```
SUBAREA Tc AND LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap        SCS    Tc
LAND USE              GROUP   (ACRES)  (INCH/HR) (DECIMAL) CN
(MIN.)
COMMERCIAL            A        1.50      0.98      0.10      32
9.15
```

```
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10
SUBAREA RUNOFF(CFS) = 3.69
TOTAL AREA(ACRES) = 1.50 PEAK FLOW RATE(CFS) = 3.69
```

```
*****
*
FLOW PROCESS FROM NODE 510.00 TO NODE 512.00 IS CODE = 21
```

```
-----
-
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
```

```
=====
=
INITIAL SUBAREA FLOW-LENGTH(FEET) = 600.00
ELEVATION DATA: UPSTREAM(FEET) = 753.00 DOWNSTREAM(FEET) = 752.40
```

```
Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 15.636
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.050
```

```
SUBAREA Tc AND LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap        SCS    Tc
LAND USE              GROUP   (ACRES)  (INCH/HR) (DECIMAL) CN
(MIN.)
COMMERCIAL            A        1.50      0.98      0.10      32
15.64
```

```
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.98
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10
SUBAREA RUNOFF(CFS) = 2.64
TOTAL AREA(ACRES) = 1.50 PEAK FLOW RATE(CFS) = 2.64
```

```
+-----
+
| East riverside Drive
|
|
|
|
+-----
+
```

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 500.00 TO NODE 502.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

=

INITIAL SUBAREA FLOW-LENGTH(FEET) = 758.00  
ELEVATION DATA: UPSTREAM(FEET) = 774.10 DOWNSTREAM(FEET) = 769.10

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$

SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 11.773

\* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.431

SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
COMMERCIAL	A	0.91	0.98	0.10	32	11.77
COMMERCIAL	C	0.39	0.57	0.10	69	11.77

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.85

SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.10

SUBAREA RUNOFF(CFS) = 2.74

TOTAL AREA(ACRES) = 1.30 PEAK FLOW RATE(CFS) = 2.74

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 502.00 TO NODE 502.00 IS CODE = 1

-----  
-

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

=====

=

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 11.77  
RAINFALL INTENSITY(INCH/HR) = 2.43  
AREA-AVERAGED  $F_m$ (INCH/HR) = 0.09  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.85  
AREA-AVERAGED  $A_p$  = 0.10  
EFFECTIVE STREAM AREA(ACRES) = 1.30  
TOTAL STREAM AREA(ACRES) = 1.30  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 2.74

\*\*\*\*\*

\*

FLOW PROCESS FROM NODE 501.00 TO NODE 502.00 IS CODE = 21

-----  
-

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<



```
=====
=
INITIAL SUBAREA FLOW-LENGTH(FEET) = 452.00
ELEVATION DATA: UPSTREAM(FEET) = 773.30 DOWNSTREAM(FEET) = 769.10
```

```
Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 8.939
* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.868
```

```
SUBAREA Tc AND LOSS RATE DATA(AMC II):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap        SCS  Tc
LAND USE                GROUP   (ACRES)  (INCH/HR) (DECIMAL) CN
(MIN.)
COMMERCIAL              A        0.55     0.98     0.10     32
8.94
COMMERCIAL              C        0.22     0.57     0.10     69
8.94
```

```
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.86
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10
SUBAREA RUNOFF(CFS) = 1.93
TOTAL AREA(ACRES) = 0.77 PEAK FLOW RATE(CFS) = 1.93
```

```
*****
*
FLOW PROCESS FROM NODE 502.00 TO NODE 502.00 IS CODE = 1
```

```
-----
-
>>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
>>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<
```

```
=====
=
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:
TIME OF CONCENTRATION(MIN.) = 8.94
RAINFALL INTENSITY(INCH/HR) = 2.87
AREA-AVERAGED Fm(INCH/HR) = 0.09
AREA-AVERAGED Fp(INCH/HR) = 0.86
AREA-AVERAGED Ap = 0.10
EFFECTIVE STREAM AREA(ACRES) = 0.77
TOTAL STREAM AREA(ACRES) = 0.77
PEAK FLOW RATE(CFS) AT CONFLUENCE = 1.93
```

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	2.74	11.77	2.431	0.85( 0.09)	0.10	1.3	500.00
2	1.93	8.94	2.868	0.86( 0.09)	0.10	0.8	501.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	4.40	8.94	2.868	0.85( 0.09)	0.10	1.8	501.00
2	4.37	11.77	2.431	0.85( 0.09)	0.10	2.1	500.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:

```
PEAK FLOW RATE(CFS) = 4.40 Tc(MIN.) = 8.94
EFFECTIVE AREA(ACRES) = 1.76 AREA-AVERAGED Fm(INCH/HR) = 0.09
```

AREA-AVERAGED  $F_p$ (INCH/HR) = 0.85 AREA-AVERAGED  $A_p$  = 0.10  
 TOTAL AREA(ACRES) = 2.07  
 LONGEST FLOWPATH FROM NODE 500.00 TO NODE 502.00 = 758.00 FEET.

\*\*\*\*\*  
 \*

FLOW PROCESS FROM NODE 505.00 TO NODE 507.00 IS CODE = 21

-----  
 -  
 >>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====  
 =

INITIAL SUBAREA FLOW-LENGTH(FEET) = 572.00  
 ELEVATION DATA: UPSTREAM(FEET) = 773.30 DOWNSTREAM(FEET) = 761.90

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] ** 0.20$   
 SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 8.432  
 \* 10 YEAR RAINFALL INTENSITY(INCH/HR) = 2.970  
 SUBAREA  $T_c$  AND LOSS RATE DATA(AMC II):

(MIN.)	DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$
8.43	COMMERCIAL	A	1.11	0.98	0.10	32	
13.40	PUBLIC PARK	A	0.34	0.98	0.85	32	

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.98  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.28  
 SUBAREA RUNOFF(CFS) = 3.53  
 TOTAL AREA(ACRES) = 1.45 PEAK FLOW RATE(CFS) = 3.53

=====  
 =

END OF STUDY SUMMARY:  
 TOTAL AREA(ACRES) = 1.45  $T_c$ (MIN.) = 8.43  
 EFFECTIVE AREA(ACRES) = 1.45 AREA-AVERAGED  $F_m$ (INCH/HR) = 0.27  
 AREA-AVERAGED  $F_p$ (INCH/HR) = 0.98 AREA-AVERAGED  $A_p$  = 0.28  
 PEAK FLOW RATE(CFS) = 3.53

=====  
 =

=====  
 =

END OF RATIONAL METHOD ANALYSIS



\*\*\*\*\*  
RATIONAL METHOD HYDROLOGY COMPUTER PROGRAM PACKAGE  
(Reference: 1986 SAN BERNARDINO CO. HYDROLOGY CRITERION)  
(c) Copyright 1983-2003 Advanced Engineering Software (aes)  
Ver. 8.0 Release Date: 01/01/2003 License ID 1269

Analysis prepared by:

MDS Consulting  
17320 Redhill Avenue, Suite 350  
Irvine, CA 92614  
949-721-8821

\*\*\*\*\* DESCRIPTION OF STUDY \*\*\*\*\*  
\* Armstrong Ranch, City of Ontario \*  
\* Preliminary Hydrology \*  
\* 100- year storm \*  
\*\*\*\*\*

FILE NAME: 80350.DAT  
TIME/DATE OF STUDY: 08:49 11/04/2015

=====

USER SPECIFIED HYDROLOGY AND HYDRAULIC MODEL INFORMATION:

=====

--\*TIME-OF-CONCENTRATION MODEL\*--

USER SPECIFIED STORM EVENT(YEAR) = 100.00  
SPECIFIED MINIMUM PIPE SIZE(INCH) = 18.00  
SPECIFIED PERCENT OF GRADIENTS(DECIMAL) TO USE FOR FRICTION SLOPE = 0.95  
\*USER-DEFINED LOGARITHMIC INTERPOLATION USED FOR RAINFALL\*  
10-YEAR STORM 60-MINUTE INTENSITY(INCH/HOUR) = 0.906  
100-YEAR STORM 60-MINUTE INTENSITY(INCH/HOUR) = 1.370  
COMPUTED RAINFALL INTENSITY DATA:  
STORM EVENT = 100.00 1-HOUR INTENSITY(INCH/HOUR) = 1.3700  
SLOPE OF INTENSITY DURATION CURVE = 0.6000

\*ANTECEDENT MOISTURE CONDITION (AMC) III ASSUMED FOR RATIONAL METHOD\*

\*USER-DEFINED STREET-SECTIONS FOR COUPLED PIPEFLOW AND STREETFLOW MODEL\*

NO.	WIDTH (FT)	CROWN TO CROSSFALL (FT)	IN- / OUT-/ SIDE / SIDE/ WAY	STREET-CROSSFALL: IN- / OUT-/ SIDE / SIDE/ WAY	PARK- WAY	CURB HEIGHT (FT)	GUTTER-GEOMETRIES: WIDTH LIP HIKE (FT) (FT) (FT)	MANNING FACTOR (n)
1	18.0	13.0	0.020/0.020/	---		0.50	2.00 0.0313 0.167	0.0150
2	32.0	27.0	0.020/0.020/	---		0.67	2.00 0.0313 0.167	0.0150

GLOBAL STREET FLOW-DEPTH CONSTRAINTS:

1. Relative Flow-Depth = 0.50 FEET  
as (Maximum Allowable Street Flow Depth) - (Top-of-Curb)
2. (Depth)\*(Velocity) Constraint = 6.0 (FT\*FT/S)

\*SIZE PIPE WITH A FLOW CAPACITY GREATER THAN  
OR EQUAL TO THE UPSTREAM TRIBUTARY PIPE.\*

\*USER-SPECIFIED MINIMUM TOPOGRAPHIC SLOPE ADJUSTMENT NOT SELECTED

\*\*\*\*\*

FLOW PROCESS FROM NODE 1.00 TO NODE 3.00 IS CODE = 21

-----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

INITIAL SUBAREA FLOW-LENGTH(FEET) = 860.00  
ELEVATION DATA: UPSTREAM(FEET) = 779.70 DOWNSTREAM(FEET) = 775.20

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 12.970  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.434  
SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
COMMERCIAL	A	1.06	0.80	0.10	52	12.97
PUBLIC PARK	A	0.44	0.80	0.85	52	20.61

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.32  
SUBAREA RUNOFF(CFS) = 4.29  
TOTAL AREA(ACRES) = 1.50 PEAK FLOW RATE(CFS) = 4.29

\*\*\*\*\*

FLOW PROCESS FROM NODE 3.00 TO NODE 5.00 IS CODE = 62

-----

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<<

=====

UPSTREAM ELEVATION(FEET) = 775.20 DOWNSTREAM ELEVATION(FEET) = 767.50  
STREET LENGTH(FEET) = 960.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 1  
Manning's FRICTION FACTOR for Streetflow Section(curb-to-curb) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 6.36  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.46  
HALFSTREET FLOOD WIDTH(FEET) = 15.03  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.60  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 1.19  
STREET FLOW TRAVEL TIME(MIN.) = 6.16 Tc(MIN.) = 19.13  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.720

SUBAREA LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
COMMERCIAL	A	1.50	0.80	0.10	52
PUBLIC PARK	A	0.30	0.80	0.85	52

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.23  
SUBAREA AREA(ACRES) = 1.80 SUBAREA RUNOFF(CFS) = 4.12  
EFFECTIVE AREA(ACRES) = 3.30 AREA-AVERAGED Fm(INCH/HR) = 0.21  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.27  
TOTAL AREA(ACRES) = 3.30 PEAK FLOW RATE(CFS) = 7.44

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.48 HALFSTREET FLOOD WIDTH(FEET) = 16.03  
FLOW VELOCITY(FEET/SEC.) = 2.70 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.29  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 5.00 = 1820.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 5.00 TO NODE 10.00 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
-----

ELEVATION DATA: UPSTREAM(FEET) = 760.50 DOWNSTREAM(FEET) = 754.60  
FLOW LENGTH(FEET) = 50.00 MANNING'S N = 0.013  
ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
DEPTH OF FLOW IN 18.0 INCH PIPE IS 5.6 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 15.80  
ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 7.44  
PIPE TRAVEL TIME(MIN.) = 0.05 Tc(MIN.) = 19.19  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 10.00 = 1870.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 10.00 TO NODE 10.00 IS CODE = 1  
-----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
-----

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 19.19  
RAINFALL INTENSITY(INCH/HR) = 2.72  
AREA-AVERAGED Fm(INCH/HR) = 0.21  
AREA-AVERAGED Fp(INCH/HR) = 0.80  
AREA-AVERAGED Ap = 0.27  
EFFECTIVE STREAM AREA(ACRES) = 3.30  
TOTAL STREAM AREA(ACRES) = 3.30  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 7.44

\*\*\*\*\*  
FLOW PROCESS FROM NODE 7.00 TO NODE 9.00 IS CODE = 21  
-----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
-----

INITIAL SUBAREA FLOW-LENGTH(FEET) = 850.00  
ELEVATION DATA: UPSTREAM(FEET) = 773.30 DOWNSTREAM(FEET) = 762.30

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 13.782  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.311  
SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	4.18	0.80	0.50	52	13.78

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA RUNOFF(CFS) = 10.96  
TOTAL AREA(ACRES) = 4.18 PEAK FLOW RATE(CFS) = 10.96

\*\*\*\*\*  
FLOW PROCESS FROM NODE 9.00 TO NODE 10.00 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
-----

ELEVATION DATA: UPSTREAM(FEET) = 755.30 DOWNSTREAM(FEET) = 754.60  
FLOW LENGTH(FEET) = 190.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 24.0 INCH PIPE IS 16.5 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 4.75  
ESTIMATED PIPE DIAMETER(INCH) = 24.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 10.96  
PIPE TRAVEL TIME(MIN.) = 0.67 Tc(MIN.) = 14.45  
LONGEST FLOWPATH FROM NODE 7.00 TO NODE 10.00 = 1040.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 10.00 TO NODE 10.00 IS CODE = 1  
-----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<  
-----

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 14.45  
RAINFALL INTENSITY(INCH/HR) = 3.22  
AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 4.18  
TOTAL STREAM AREA(ACRES) = 4.18  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 10.96

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	7.44	19.19	2.715	0.80( 0.21)	0.27	3.3	1.00
2	10.96	14.45	3.219	0.80( 0.40)	0.50	4.2	7.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	17.69	14.45	3.219	0.80( 0.33)	0.41	6.7	7.00
2	16.45	19.19	2.715	0.80( 0.32)	0.40	7.5	1.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 17.69 Tc(MIN.) = 14.45  
EFFECTIVE AREA(ACRES) = 6.67 AREA-AVERAGED Fm(INCH/HR) = 0.33  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.41  
TOTAL AREA(ACRES) = 7.48  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 10.00 = 1870.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 10.00 TO NODE 10.10 IS CODE = 31

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
=====

ELEVATION DATA: UPSTREAM(FEET) = 754.60 DOWNSTREAM(FEET) = 752.10  
FLOW LENGTH(FEET) = 690.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 27.0 INCH PIPE IS 21.5 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.21  
ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 17.69  
PIPE TRAVEL TIME(MIN.) = 2.21 Tc(MIN.) = 16.66  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 10.10 = 2560.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 10.10 TO NODE 10.10 IS CODE = 1

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
=====

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 16.66  
RAINFALL INTENSITY(INCH/HR) = 2.96  
AREA-AVERAGED Fm(INCH/HR) = 0.33  
AREA-AVERAGED Fp(INCH/HR) = 0.80  
AREA-AVERAGED Ap = 0.41  
EFFECTIVE STREAM AREA(ACRES) = 6.67  
TOTAL STREAM AREA(ACRES) = 7.48  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 17.69

\*\*\*\*\*  
FLOW PROCESS FROM NODE 10.30 TO NODE 10.20 IS CODE = 21

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
=====

INITIAL SUBAREA FLOW-LENGTH(FEET) = 900.00  
ELEVATION DATA: UPSTREAM(FEET) = 765.20 DOWNSTREAM(FEET) = 760.00

$Tc = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] * 0.20$   
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.569  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.965

SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
RESIDENTIAL "5-7 DWELLINGS/ACRE"	A	2.52	0.80	0.50	52	16.57

SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA RUNOFF(CFS) = 5.82  
TOTAL AREA(ACRES) = 2.52 PEAK FLOW RATE(CFS) = 5.82

\*\*\*\*\*  
FLOW PROCESS FROM NODE 10.20 TO NODE 10.10 IS CODE = 31

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
=====

ELEVATION DATA: UPSTREAM(FEET) = 753.00 DOWNSTREAM(FEET) = 752.10  
FLOW LENGTH(FEET) = 70.00 MANNING'S N = 0.013  
ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
DEPTH OF FLOW IN 18.0 INCH PIPE IS 9.0 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.58  
ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 5.82  
PIPE TRAVEL TIME(MIN.) = 0.18 Tc(MIN.) = 16.75  
LONGEST FLOWPATH FROM NODE 10.30 TO NODE 10.10 = 970.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 10.10 TO NODE 10.10 IS CODE = 1

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<  
=====

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 16.75  
RAINFALL INTENSITY(INCH/HR) = 2.95  
AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80

AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 2.52  
TOTAL STREAM AREA(ACRES) = 2.52  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 5.82

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	17.69	16.66	2.956	0.80( 0.33)	0.41	6.7	7.00
1	16.45	21.41	2.543	0.80( 0.32)	0.40	7.5	1.00
2	5.82	16.75	2.946	0.80( 0.40)	0.50	2.5	10.30

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	23.51	16.66	2.956	0.80( 0.35)	0.44	9.2	7.00
2	23.49	16.75	2.946	0.80( 0.35)	0.44	9.2	10.30
3	21.35	21.41	2.543	0.80( 0.34)	0.42	10.0	1.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 23.51 Tc(MIN.) = 16.66  
EFFECTIVE AREA(ACRES) = 9.17 AREA-AVERAGED Fm(INCH/HR) = 0.35  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.44  
TOTAL AREA(ACRES) = 10.00  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 10.10 = 2560.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 10.10 TO NODE 12.00 IS CODE = 31

-----  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
-----  
ELEVATION DATA: UPSTREAM(FEET) = 752.10 DOWNSTREAM(FEET) = 751.90  
FLOW LENGTH(FEET) = 74.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 33.0 INCH PIPE IS 24.0 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.09  
ESTIMATED PIPE DIAMETER(INCH) = 33.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 23.51  
PIPE TRAVEL TIME(MIN.) = 0.24 Tc(MIN.) = 16.90  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 12.00 = 2634.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 12.00 TO NODE 12.00 IS CODE = 81

-----  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<  
-----  
MAINLINE Tc(MIN) = 16.90  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.930  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 1.39 0.80 0.10 52  
COMMERCIAL C 1.26 0.27 0.10 86  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.55  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA AREA(ACRES) = 2.65 SUBAREA RUNOFF(CFS) = 6.86  
EFFECTIVE AREA(ACRES) = 11.82 AREA-AVERAGED Fm(INCH/HR) = 0.28  
AREA-AVERAGED Fp(INCH/HR) = 0.78 AREA-AVERAGED Ap = 0.36  
TOTAL AREA(ACRES) = 12.65 PEAK FLOW RATE(CFS) = 28.17

\*\*\*\*\*  
FLOW PROCESS FROM NODE 12.00 TO NODE 12.00 IS CODE = 81

-----  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<  
-----  
MAINLINE Tc(MIN) = 16.90  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.930  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
PUBLIC PARK C 0.75 0.27 0.85 86  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.85  
SUBAREA AREA(ACRES) = 0.75 SUBAREA RUNOFF(CFS) = 1.82  
EFFECTIVE AREA(ACRES) = 12.57 AREA-AVERAGED Fm(INCH/HR) = 0.28  
AREA-AVERAGED Fp(INCH/HR) = 0.71 AREA-AVERAGED Ap = 0.39  
TOTAL AREA(ACRES) = 13.40 PEAK FLOW RATE(CFS) = 29.99

\*\*\*\*\*  
FLOW PROCESS FROM NODE 12.00 TO NODE 69.00 IS CODE = 31

-----  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
-----  
ELEVATION DATA: UPSTREAM(FEET) = 751.90 DOWNSTREAM(FEET) = 746.50  
FLOW LENGTH(FEET) = 550.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 30.0 INCH PIPE IS 19.5 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 8.87  
ESTIMATED PIPE DIAMETER(INCH) = 30.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 29.99  
PIPE TRAVEL TIME(MIN.) = 1.03 Tc(MIN.) = 17.93  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 69.00 = 3184.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 69.00 TO NODE 69.00 IS CODE = 10

-----  
>>>>MAIN-STREAM MEMORY COPIED ONTO MEMORY BANK # 1 <<<<<  
-----

\*\*\*\*\*

```

FLOW PROCESS FROM NODE      40.00 TO NODE      42.00 IS CODE = 21
-----
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
=====
INITIAL SUBAREA FLOW-LENGTH(FEET) = 770.00
ELEVATION DATA: UPSTREAM(FEET) = 768.80 DOWNSTREAM(FEET) = 760.90

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 13.878
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.298
SUBAREA Tc AND LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp      Ap      SCS      Tc
LAND USE                GROUP  (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   A      4.05     0.80     0.50     52   13.88
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA RUNOFF(CFS) = 10.57
TOTAL AREA(ACRES) = 4.05 PEAK FLOW RATE(CFS) = 10.57
*****
FLOW PROCESS FROM NODE      42.00 TO NODE      42.00 IS CODE = 81
-----
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
=====
MAINLINE Tc(MIN) = 13.88
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.298
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp      Ap      SCS
LAND USE                GROUP  (ACRES)  (INCH/HR)  (DECIMAL)  CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   A      0.88     0.80     0.50     52
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA AREA(ACRES) = 0.88 SUBAREA RUNOFF(CFS) = 2.30
EFFECTIVE AREA(ACRES) = 4.93 AREA-AVERAGED Fm(INCH/HR) = 0.40
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.50
TOTAL AREA(ACRES) = 4.93 PEAK FLOW RATE(CFS) = 12.87
*****
FLOW PROCESS FROM NODE      42.00 TO NODE      42.10 IS CODE = 31
-----
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
=====
ELEVATION DATA: UPSTREAM(FEET) = 753.90 DOWNSTREAM(FEET) = 752.80
FLOW LENGTH(FEET) = 270.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 24.0 INCH PIPE IS 18.0 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.08
ESTIMATED PIPE DIAMETER(INCH) = 24.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 12.87
PIPE TRAVEL TIME(MIN.) = 0.89 Tc(MIN.) = 14.76
LONGEST FLOWPATH FROM NODE      40.00 TO NODE      42.10 = 1040.00 FEET.
*****
FLOW PROCESS FROM NODE      42.10 TO NODE      42.10 IS CODE = 81
-----
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
=====
MAINLINE Tc(MIN) = 14.76
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.178
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp      Ap      SCS
LAND USE                GROUP  (ACRES)  (INCH/HR)  (DECIMAL)  CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   A      1.45     0.80     0.50     52
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   C      0.17     0.27     0.50     86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.74
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA AREA(ACRES) = 1.62 SUBAREA RUNOFF(CFS) = 4.09
EFFECTIVE AREA(ACRES) = 6.55 AREA-AVERAGED Fm(INCH/HR) = 0.39
AREA-AVERAGED Fp(INCH/HR) = 0.78 AREA-AVERAGED Ap = 0.50
TOTAL AREA(ACRES) = 6.55 PEAK FLOW RATE(CFS) = 16.43
*****
FLOW PROCESS FROM NODE      42.10 TO NODE      42.20 IS CODE = 31
-----
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
=====
ELEVATION DATA: UPSTREAM(FEET) = 752.80 DOWNSTREAM(FEET) = 751.40
FLOW LENGTH(FEET) = 35.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 18.0 INCH PIPE IS 12.2 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 12.88
ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 16.43
PIPE TRAVEL TIME(MIN.) = 0.05 Tc(MIN.) = 14.81
LONGEST FLOWPATH FROM NODE      40.00 TO NODE      42.20 = 1075.00 FEET.
*****
FLOW PROCESS FROM NODE      42.10 TO NODE      42.10 IS CODE = 1
-----
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
=====
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:
TIME OF CONCENTRATION(MIN.) = 14.81
RAINFALL INTENSITY(INCH/HR) = 3.17
AREA-AVERAGED Fm(INCH/HR) = 0.39
AREA-AVERAGED Fp(INCH/HR) = 0.78
AREA-AVERAGED Ap = 0.50

```



EFFECTIVE STREAM AREA(ACRES) = 6.55  
TOTAL STREAM AREA(ACRES) = 6.55  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 16.43

\*\*\*\*\*  
FLOW PROCESS FROM NODE 43.00 TO NODE 43.10 IS CODE = 21  
-----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
-----  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 630.00  
ELEVATION DATA: UPSTREAM(FEET) = 770.20 DOWNSTREAM(FEET) = 763.90  
  
Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 12.873  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.450  
SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 4.00 0.80 0.50 52 12.87  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA RUNOFF(CFS) = 10.99  
TOTAL AREA(ACRES) = 4.00 PEAK FLOW RATE(CFS) = 10.99

\*\*\*\*\*  
FLOW PROCESS FROM NODE 43.10 TO NODE 43.20 IS CODE = 62  
-----

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<<<<<<  
-----  
UPSTREAM ELEVATION(FEET) = 763.90 DOWNSTREAM ELEVATION(FEET) = 762.80  
STREET LENGTH(FEET) = 240.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curb) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 12.02  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.49  
HALFSTREET FLOOD WIDTH(FEET) = 16.47  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.07  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 1.01  
STREET FLOW TRAVEL TIME(MIN.) = 1.93 Tc(MIN.) = 14.80  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.172  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 0.83 0.80 0.50 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 0.83 SUBAREA RUNOFF(CFS) = 2.07  
EFFECTIVE AREA(ACRES) = 4.83 AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 4.83 PEAK FLOW RATE(CFS) = 12.06

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.49 HALFSTREET FLOOD WIDTH(FEET) = 16.53  
FLOW VELOCITY(FEET/SEC.) = 2.06 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.01  
LONGEST FLOWPATH FROM NODE 43.00 TO NODE 43.20 = 870.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 42.30 TO NODE 42.30 IS CODE = 1  
-----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<<<<<  
-----

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 14.80  
RAINFALL INTENSITY(INCH/HR) = 3.17  
AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 4.83  
TOTAL STREAM AREA(ACRES) = 4.83  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 12.06

** CONFLUENCE DATA **						
STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae HEADWATER NODE
1	16.43	14.81	3.172	0.78( 0.39)	0.50	6.6 40.00
2	12.06	14.80	3.172	0.80( 0.40)	0.50	4.8 43.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

** PEAK FLOW RATE TABLE **						
STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae HEADWATER NODE
1	28.48	14.80	3.172	0.79( 0.39)	0.50	11.4 43.00
2	28.48	14.81	3.172	0.79( 0.39)	0.50	11.4 40.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 28.48 Tc(MIN.) = 14.80  
EFFECTIVE AREA(ACRES) = 11.38 AREA-AVERAGED Fm(INCH/HR) = 0.39

AREA-AVERAGED Fp(INCH/HR) = 0.79 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 11.38  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 42.30 = 1075.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 43.20 TO NODE 43.20 IS CODE = 81  
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<  
-----  
MAINLINE Tc(MIN) = 14.80  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.172  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.77 0.80 0.50 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 1.77 SUBAREA RUNOFF(CFS) = 4.42  
EFFECTIVE AREA(ACRES) = 13.15 AREA-AVERAGED Fm(INCH/HR) = 0.39  
AREA-AVERAGED Fp(INCH/HR) = 0.79 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 13.15 PEAK FLOW RATE(CFS) = 32.87

\*\*\*\*\*  
FLOW PROCESS FROM NODE 43.20 TO NODE 43.30 IS CODE = 62  
-----

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<  
-----  
UPSTREAM ELEVATION(FEET) = 762.80 DOWNSTREAM ELEVATION(FEET) = 761.10  
STREET LENGTH(FEET) = 238.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 34.59

\*\*\*STREET FLOWING FULL\*\*\*

STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
NOTE: STREET FLOW EXCEEDS TOP OF CURB.  
THE FOLLOWING STREET FLOW RESULTS ARE BASED ON THE ASSUMPTION  
THAT NEGLIBLE FLOW OCCURS OUTSIDE OF THE STREET CHANNEL.  
THAT IS, ALL FLOW ALONG THE PARKWAY, ETC., IS NEGLECTED.

STREET FLOW DEPTH(FEET) = 0.60  
HALFSTREET FLOOD WIDTH(FEET) = 18.00  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 3.47  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 2.10  
STREET FLOW TRAVEL TIME(MIN.) = 1.14 Tc(MIN.) = 15.95  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.034

SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.45 0.80 0.50 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 1.45 SUBAREA RUNOFF(CFS) = 3.44  
EFFECTIVE AREA(ACRES) = 14.60 AREA-AVERAGED Fm(INCH/HR) = 0.39  
AREA-AVERAGED Fp(INCH/HR) = 0.79 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 14.60 PEAK FLOW RATE(CFS) = 34.67

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.60 HALFSTREET FLOOD WIDTH(FEET) = 18.00  
FLOW VELOCITY(FEET/SEC.) = 3.48 DEPTH\*VELOCITY(FT\*FT/SEC.) = 2.10  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 43.30 = 1313.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 43.30 TO NODE 42.20 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<  
-----  
ELEVATION DATA: UPSTREAM(FEET) = 754.10 DOWNSTREAM(FEET) = 751.40  
FLOW LENGTH(FEET) = 270.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 30.0 INCH PIPE IS 21.6 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 9.17  
ESTIMATED PIPE DIAMETER(INCH) = 30.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 34.67  
PIPE TRAVEL TIME(MIN.) = 0.49 Tc(MIN.) = 16.44  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 42.20 = 1583.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 42.20 TO NODE 42.30 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<  
-----  
ELEVATION DATA: UPSTREAM(FEET) = 751.40 DOWNSTREAM(FEET) = 750.40  
FLOW LENGTH(FEET) = 250.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 36.0 INCH PIPE IS 25.3 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.52  
ESTIMATED PIPE DIAMETER(INCH) = 36.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 34.67  
PIPE TRAVEL TIME(MIN.) = 0.64 Tc(MIN.) = 17.08  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 42.30 = 1833.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 42.30 TO NODE 42.30 IS CODE = 81  
-----

```

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
MAINLINE Tc(MIN) = 17.08
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.912
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp      Ap      SCS
LAND USE                GROUP  (ACRES)  (INCH/HR)  (DECIMAL)  CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE"    A      1.09     0.80     0.50     52
RESIDENTIAL
"5-7 DWELLINGS/ACRE"    C      0.49     0.27     0.50     86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.63
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA AREA(ACRES) = 1.58      SUBAREA RUNOFF(CFS) = 3.69
EFFECTIVE AREA(ACRES) = 16.18   AREA-AVERAGED Fm(INCH/HR) = 0.39
AREA-AVERAGED Fp(INCH/HR) = 0.77 AREA-AVERAGED Ap = 0.50
TOTAL AREA(ACRES) = 16.18      PEAK FLOW RATE(CFS) = 36.76

```

```

*****
FLOW PROCESS FROM NODE 42.30 TO NODE 56.00 IS CODE = 31
-----

```

```

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
=====
ELEVATION DATA: UPSTREAM(FEET) = 750.40 DOWNSTREAM(FEET) = 749.50
FLOW LENGTH(FEET) = 210.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 36.0 INCH PIPE IS 25.8 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.78
ESTIMATED PIPE DIAMETER(INCH) = 36.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 36.76
PIPE TRAVEL TIME(MIN.) = 0.52 Tc(MIN.) = 17.59
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 56.00 = 2043.00 FEET.

```

```

*****
FLOW PROCESS FROM NODE 56.00 TO NODE 56.00 IS CODE = 81
-----

```

```

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
MAINLINE Tc(MIN) = 17.59
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.860
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp      Ap      SCS
LAND USE                GROUP  (ACRES)  (INCH/HR)  (DECIMAL)  CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE"    C      3.62     0.27     0.50     86
PUBLIC PARK              C      1.30     0.27     0.85     86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.59
SUBAREA AREA(ACRES) = 4.92      SUBAREA RUNOFF(CFS) = 11.95
EFFECTIVE AREA(ACRES) = 21.10   AREA-AVERAGED Fm(INCH/HR) = 0.33
AREA-AVERAGED Fp(INCH/HR) = 0.64 AREA-AVERAGED Ap = 0.52
TOTAL AREA(ACRES) = 21.10      PEAK FLOW RATE(CFS) = 47.96

```

```

*****
FLOW PROCESS FROM NODE 56.00 TO NODE 59.00 IS CODE = 31
-----

```

```

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
=====
ELEVATION DATA: UPSTREAM(FEET) = 749.50 DOWNSTREAM(FEET) = 747.10
FLOW LENGTH(FEET) = 620.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 39.0 INCH PIPE IS 30.6 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.87
ESTIMATED PIPE DIAMETER(INCH) = 39.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 47.96
PIPE TRAVEL TIME(MIN.) = 1.50 Tc(MIN.) = 19.10
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 59.00 = 2663.00 FEET.

```

```

*****
FLOW PROCESS FROM NODE 59.00 TO NODE 59.00 IS CODE = 1
-----

```

```

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<
=====
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:
TIME OF CONCENTRATION(MIN.) = 19.10
RAINFALL INTENSITY(INCH/HR) = 2.72
AREA-AVERAGED Fm(INCH/HR) = 0.33
AREA-AVERAGED Fp(INCH/HR) = 0.64
AREA-AVERAGED Ap = 0.52
EFFECTIVE STREAM AREA(ACRES) = 21.10
TOTAL STREAM AREA(ACRES) = 21.10
PEAK FLOW RATE(CFS) AT CONFLUENCE = 47.96

```

```

*****
FLOW PROCESS FROM NODE 58.00 TO NODE 59.00 IS CODE = 21
-----

```

```

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<
>>>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
=====
INITIAL SUBAREA FLOW-LENGTH(FEET) = 620.00
ELEVATION DATA: UPSTREAM(FEET) = 761.50 DOWNSTREAM(FEET) = 759.60

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 17.162
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.903
SUBAREA Tc AND LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp      Ap      SCS      Tc
LAND USE                GROUP  (ACRES)  (INCH/HR)  (DECIMAL)  CN  (MIN.)
RESIDENTIAL
"3-4 DWELLINGS/ACRE"    C      3.49     0.27     0.60     86     17.16
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60

```

SUBAREA RUNOFF(CFS) = 8.61  
TOTAL AREA(ACRES) = 3.49 PEAK FLOW RATE(CFS) = 8.61

\*\*\*\*\*  
FLOW PROCESS FROM NODE 59.00 TO NODE 59.00 IS CODE = 1  
-----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

-----  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 17.16  
RAINFALL INTENSITY(INCH/HR) = 2.90  
AREA-AVERAGED Fm(INCH/HR) = 0.16  
AREA-AVERAGED Fp(INCH/HR) = 0.27  
AREA-AVERAGED Ap = 0.60  
EFFECTIVE STREAM AREA(ACRES) = 3.49  
TOTAL STREAM AREA(ACRES) = 3.49  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 8.61

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	47.96	19.10	2.723	0.64( 0.33)	0.52	21.1	43.00
1	47.95	19.10	2.723	0.64( 0.33)	0.52	21.1	40.00
2	8.61	17.16	2.903	0.27( 0.16)	0.60	3.5	58.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	54.96	17.16	2.903	0.58( 0.31)	0.53	22.5	58.00
2	56.00	19.10	2.723	0.58( 0.31)	0.53	24.6	43.00
3	55.99	19.10	2.723	0.58( 0.31)	0.53	24.6	40.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 56.00 Tc(MIN.) = 19.10  
EFFECTIVE AREA(ACRES) = 24.59 AREA-AVERAGED Fm(INCH/HR) = 0.31  
AREA-AVERAGED Fp(INCH/HR) = 0.58 AREA-AVERAGED Ap = 0.53  
TOTAL AREA(ACRES) = 24.59  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 59.00 = 2663.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 59.00 TO NODE 67.00 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

-----  
ELEVATION DATA: UPSTREAM(FEET) = 747.70 DOWNSTREAM(FEET) = 747.00  
FLOW LENGTH(FEET) = 45.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 33.0 INCH PIPE IS 23.8 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 12.20  
ESTIMATED PIPE DIAMETER(INCH) = 33.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 56.00  
PIPE TRAVEL TIME(MIN.) = 0.06 Tc(MIN.) = 19.16  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 67.00 = 2708.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 67.00 TO NODE 67.00 IS CODE = 10  
-----

>>>>MAIN-STREAM MEMORY COPIED ONTO MEMORY BANK # 2 <<<<<

\*\*\*\*\*  
FLOW PROCESS FROM NODE 60.00 TO NODE 62.00 IS CODE = 21  
-----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

-----  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 300.00  
ELEVATION DATA: UPSTREAM(FEET) = 764.00 DOWNSTREAM(FEET) = 759.70  
  
Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 9.429  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 4.158  
SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
RESIDENTIAL  
"3-4 DWELLINGS/ACRE" C 2.25 0.27 0.60 86 9.43  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60  
SUBAREA RUNOFF(CFS) = 8.09  
TOTAL AREA(ACRES) = 2.25 PEAK FLOW RATE(CFS) = 8.09

\*\*\*\*\*  
FLOW PROCESS FROM NODE 62.00 TO NODE 66.00 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

-----  
ELEVATION DATA: UPSTREAM(FEET) = 752.70 DOWNSTREAM(FEET) = 752.10  
FLOW LENGTH(FEET) = 165.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 21.0 INCH PIPE IS 15.1 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 4.36  
ESTIMATED PIPE DIAMETER(INCH) = 21.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 8.09  
PIPE TRAVEL TIME(MIN.) = 0.63 Tc(MIN.) = 10.06  
LONGEST FLOWPATH FROM NODE 60.00 TO NODE 66.00 = 465.00 FEET.

\*\*\*\*\*

```

FLOW PROCESS FROM NODE      66.00 TO NODE      66.00 IS CODE =  1
-----
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<
-----
TOTAL NUMBER OF STREAMS =  2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  1 ARE:
TIME OF CONCENTRATION(MIN.) = 10.06
RAINFALL INTENSITY(INCH/HR) =  4.00
AREA-AVERAGED Fm(INCH/HR) =  0.16
AREA-AVERAGED Fp(INCH/HR) =  0.27
AREA-AVERAGED Ap =  0.60
EFFECTIVE STREAM AREA(ACRES) =  2.25
TOTAL STREAM AREA(ACRES) =  2.25
PEAK FLOW RATE(CFS) AT CONFLUENCE =  8.09

```

```

*****
FLOW PROCESS FROM NODE      63.00 TO NODE      65.00 IS CODE = 21
-----
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<
>>>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
-----
INITIAL SUBAREA FLOW-LENGTH(FEET) = 270.00
ELEVATION DATA: UPSTREAM( FEET) =  763.60  DOWNSTREAM( FEET) =  760.30

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) =  8.812
* 100 YEAR RAINFALL INTENSITY(INCH/HR) =  4.331
SUBAREA Tc AND LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL AREA      Fp      Ap      SCS      Tc
LAND USE              GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)
RESIDENTIAL
"5-7 DWELLINGS/ACRE"  C      1.38      0.27      0.50      86      8.81
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =  0.27
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =  0.50
SUBAREA RUNOFF(CFS) =  5.21
TOTAL AREA(ACRES) =  1.38  PEAK FLOW RATE(CFS) =  5.21

```

```

*****
FLOW PROCESS FROM NODE      65.00 TO NODE      66.00 IS CODE = 31
-----
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
-----
ELEVATION DATA: UPSTREAM( FEET) =  753.30  DOWNSTREAM( FEET) =  752.10
FLOW LENGTH( FEET) =  300.00  MANNING'S N =  0.013
DEPTH OF FLOW IN 18.0 INCH PIPE IS 12.2 INCHES
PIPE-FLOW VELOCITY( FEET/SEC.) =  4.08
ESTIMATED PIPE DIAMETER( INCH) =  18.00  NUMBER OF PIPES =  1
PIPE-FLOW(CFS) =  5.21
PIPE TRAVEL TIME(MIN.) =  1.23  Tc(MIN.) =  10.04
LONGEST FLOWPATH FROM NODE      63.00 TO NODE      66.00 =  570.00 FEET.

```

```

*****
FLOW PROCESS FROM NODE      66.00 TO NODE      66.00 IS CODE =  1
-----
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<
-----
TOTAL NUMBER OF STREAMS =  2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM  2 ARE:
TIME OF CONCENTRATION(MIN.) = 10.04
RAINFALL INTENSITY(INCH/HR) =  4.01
AREA-AVERAGED Fm(INCH/HR) =  0.14
AREA-AVERAGED Fp(INCH/HR) =  0.27
AREA-AVERAGED Ap =  0.50
EFFECTIVE STREAM AREA(ACRES) =  1.38
TOTAL STREAM AREA(ACRES) =  1.38
PEAK FLOW RATE(CFS) AT CONFLUENCE =  5.21

```

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	8.09	10.06	4.000	0.27( 0.16)	0.60	2.2	60.00
2	5.21	10.04	4.005	0.27( 0.14)	0.50	1.4	63.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	13.29	10.04	4.005	0.27( 0.15)	0.56	3.6	63.00
2	13.29	10.06	4.000	0.27( 0.15)	0.56	3.6	60.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 13.29 Tc(MIN.) = 10.04  
EFFECTIVE AREA(ACRES) = 3.63 AREA-AVERAGED Fm(INCH/HR) = 0.15  
AREA-AVERAGED Fp(INCH/HR) = 0.27 AREA-AVERAGED Ap = 0.56  
TOTAL AREA(ACRES) = 3.63  
LONGEST FLOWPATH FROM NODE 63.00 TO NODE 66.00 = 570.00 FEET.

```

*****
FLOW PROCESS FROM NODE      66.00 TO NODE      67.00 IS CODE = 31
-----
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
-----
ELEVATION DATA: UPSTREAM( FEET) =  752.10  DOWNSTREAM( FEET) =  747.00
FLOW LENGTH( FEET) =  140.00  MANNING'S N =  0.013
DEPTH OF FLOW IN 18.0 INCH PIPE IS 10.9 INCHES
PIPE-FLOW VELOCITY( FEET/SEC.) =  11.89
ESTIMATED PIPE DIAMETER( INCH) =  18.00  NUMBER OF PIPES =  1
PIPE-FLOW(CFS) =  13.29

```

PIPE TRAVEL TIME(MIN.) = 0.20 Tc(MIN.) = 10.23  
LONGEST FLOWPATH FROM NODE 63.00 TO NODE 67.00 = 710.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 67.00 TO NODE 67.00 IS CODE = 11

>>>>CONFLUENCE MEMORY BANK # 2 WITH THE MAIN-STREAM MEMORY<<<<<  
=====

\*\* MAIN STREAM CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	13.29	10.23	3.959	0.27( 0.15)	0.56	3.6	63.00
2	13.29	10.26	3.954	0.27( 0.15)	0.56	3.6	60.00

LONGEST FLOWPATH FROM NODE 63.00 TO NODE 67.00 = 710.00 FEET.

\*\* MEMORY BANK # 2 CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	54.96	17.22	2.897	0.58( 0.31)	0.53	22.5	58.00
2	56.00	19.16	2.718	0.58( 0.31)	0.53	24.6	43.00
3	55.99	19.16	2.717	0.58( 0.31)	0.53	24.6	40.00

LONGEST FLOWPATH FROM NODE 40.00 TO NODE 67.00 = 2708.00 FEET.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	59.35	10.23	3.959	0.51( 0.27)	0.54	17.0	63.00
2	59.38	10.26	3.954	0.51( 0.27)	0.54	17.0	60.00
3	64.56	17.22	2.897	0.53( 0.29)	0.54	26.1	58.00
4	64.97	19.16	2.718	0.54( 0.29)	0.54	28.2	43.00
5	64.96	19.16	2.717	0.54( 0.29)	0.54	28.2	40.00

TOTAL AREA(ACRES) = 28.22

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 64.97 Tc(MIN.) = 19.157  
EFFECTIVE AREA(ACRES) = 28.22 AREA-AVERAGED Fm(INCH/HR) = 0.29  
AREA-AVERAGED Fp(INCH/HR) = 0.54 AREA-AVERAGED Ap = 0.54  
TOTAL AREA(ACRES) = 28.22  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 67.00 = 2708.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 67.00 TO NODE 69.00 IS CODE = 31

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

ELEVATION DATA: UPSTREAM(FEET) = 747.00 DOWNSTREAM(FEET) = 746.50  
FLOW LENGTH(FEET) = 150.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 45.0 INCH PIPE IS 35.2 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 7.01  
ESTIMATED PIPE DIAMETER(INCH) = 45.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 64.97  
PIPE TRAVEL TIME(MIN.) = 0.36 Tc(MIN.) = 19.51  
LONGEST FLOWPATH FROM NODE 40.00 TO NODE 69.00 = 2858.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 69.00 TO NODE 69.00 IS CODE = 11

>>>>CONFLUENCE MEMORY BANK # 1 WITH THE MAIN-STREAM MEMORY<<<<<  
=====

\*\* MAIN STREAM CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	59.35	10.59	3.878	0.51( 0.27)	0.54	17.0	63.00
2	59.38	10.62	3.873	0.51( 0.27)	0.54	17.0	60.00
3	64.56	17.58	2.861	0.53( 0.29)	0.54	26.1	58.00
4	64.97	19.51	2.688	0.54( 0.29)	0.54	28.2	43.00
5	64.96	19.52	2.687	0.54( 0.29)	0.54	28.2	40.00

LONGEST FLOWPATH FROM NODE 40.00 TO NODE 69.00 = 2858.00 FEET.

\*\* MEMORY BANK # 1 CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	29.99	17.93	2.828	0.71( 0.28)	0.39	12.6	7.00
2	29.96	18.02	2.819	0.71( 0.28)	0.39	12.6	10.30
3	27.13	22.73	2.453	0.72( 0.28)	0.38	13.4	1.00

LONGEST FLOWPATH FROM NODE 1.00 TO NODE 69.00 = 3184.00 FEET.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	84.37	10.59	3.878	0.56( 0.28)	0.49	24.4	63.00
2	84.42	10.62	3.873	0.56( 0.28)	0.49	24.4	60.00
3	94.35	17.58	2.861	0.58( 0.28)	0.49	38.4	58.00
4	94.63	17.93	2.828	0.58( 0.28)	0.49	39.0	7.00
5	94.61	18.02	2.819	0.58( 0.28)	0.49	39.2	10.30
6	94.03	19.51	2.688	0.58( 0.29)	0.49	41.1	43.00
7	94.02	19.52	2.687	0.58( 0.29)	0.49	41.1	40.00
8	85.74	22.73	2.453	0.59( 0.29)	0.49	41.6	1.00

TOTAL AREA(ACRES) = 41.62

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 94.63 Tc(MIN.) = 17.932  
EFFECTIVE AREA(ACRES) = 39.04 AREA-AVERAGED Fm(INCH/HR) = 0.28  
AREA-AVERAGED Fp(INCH/HR) = 0.58 AREA-AVERAGED Ap = 0.49  
TOTAL AREA(ACRES) = 41.62  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 69.00 = 3184.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 69.00 TO NODE 69.00 IS CODE = 10

```

>>>>MAIN-STREAM MEMORY COPIED ONTO MEMORY BANK # 3 <<<<
=====
*****
FLOW PROCESS FROM NODE    24.00 TO NODE    25.00 IS CODE = 21
-----
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
=====
INITIAL SUBAREA FLOW-LENGTH(FEET) = 950.00
ELEVATION DATA: UPSTREAM(FEET) = 771.70 DOWNSTREAM(FEET) = 765.00

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.269
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.998
SUBAREA Tc AND LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA   Fp      Ap      SCS   Tc
LAND USE              GROUP  (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   C      3.84   0.27   0.50   86   16.27
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA RUNOFF(CFS) = 9.89
TOTAL AREA(ACRES) = 3.84 PEAK FLOW RATE(CFS) = 9.89

*****
FLOW PROCESS FROM NODE    25.00 TO NODE    25.10 IS CODE = 31
-----
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
=====
ELEVATION DATA: UPSTREAM(FEET) = 758.00 DOWNSTREAM(FEET) = 756.90
FLOW LENGTH(FEET) = 245.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 21.0 INCH PIPE IS 16.4 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 4.90
ESTIMATED PIPE DIAMETER(INCH) = 21.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 9.89
PIPE TRAVEL TIME(MIN.) = 0.83 Tc(MIN.) = 17.10
LONGEST FLOWPATH FROM NODE    24.00 TO NODE    25.10 = 1195.00 FEET.

*****
FLOW PROCESS FROM NODE    25.10 TO NODE    25.10 IS CODE = 81
-----
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
MAINLINE Tc(MIN) = 17.10
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.909
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA   Fp      Ap      SCS
LAND USE              GROUP  (ACRES) (INCH/HR) (DECIMAL) CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   C      3.18   0.27   0.50   86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA AREA(ACRES) = 3.18 SUBAREA RUNOFF(CFS) = 7.94
EFFECTIVE AREA(ACRES) = 7.02 AREA-AVERAGED Fm(INCH/HR) = 0.14
AREA-AVERAGED Fp(INCH/HR) = 0.27 AREA-AVERAGED Ap = 0.50
TOTAL AREA(ACRES) = 7.02 PEAK FLOW RATE(CFS) = 17.52

*****
FLOW PROCESS FROM NODE    25.10 TO NODE    25.10 IS CODE = 81
-----
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
MAINLINE Tc(MIN) = 17.10
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.909
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA   Fp      Ap      SCS
LAND USE              GROUP  (ACRES) (INCH/HR) (DECIMAL) CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   A      0.78   0.80   0.50   52
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   C      1.00   0.27   0.50   86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.50
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA AREA(ACRES) = 1.78 SUBAREA RUNOFF(CFS) = 4.26
EFFECTIVE AREA(ACRES) = 8.80 AREA-AVERAGED Fm(INCH/HR) = 0.16
AREA-AVERAGED Fp(INCH/HR) = 0.32 AREA-AVERAGED Ap = 0.50
TOTAL AREA(ACRES) = 8.80 PEAK FLOW RATE(CFS) = 21.78

*****
FLOW PROCESS FROM NODE    25.10 TO NODE    29.00 IS CODE = 31
-----
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
=====
ELEVATION DATA: UPSTREAM(FEET) = 756.90 DOWNSTREAM(FEET) = 755.90
FLOW LENGTH(FEET) = 295.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 30.0 INCH PIPE IS 23.0 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.39
ESTIMATED PIPE DIAMETER(INCH) = 30.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 21.78
PIPE TRAVEL TIME(MIN.) = 0.91 Tc(MIN.) = 18.02
LONGEST FLOWPATH FROM NODE    24.00 TO NODE    29.00 = 1490.00 FEET.

*****
FLOW PROCESS FROM NODE    29.00 TO NODE    29.00 IS CODE = 1
-----
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<
=====
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:
TIME OF CONCENTRATION(MIN.) = 18.02

```

RAINFALL INTENSITY(INCH/HR) = 2.82  
AREA-AVERAGED Fm(INCH/HR) = 0.16  
AREA-AVERAGED Fp(INCH/HR) = 0.32  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 8.80  
TOTAL STREAM AREA(ACRES) = 8.80  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 21.78

\*\*\*\*\*  
FLOW PROCESS FROM NODE 20.00 TO NODE 22.00 IS CODE = 21  
-----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
-----

INITIAL SUBAREA FLOW-LENGTH(FEET) = 995.00  
ELEVATION DATA: UPSTREAM(FEET) = 773.30 DOWNSTREAM(FEET) = 766.10

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.488  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.974

SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.67 0.80 0.50 52 16.49  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 0.78 0.27 0.50 86 16.49  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.63  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA RUNOFF(CFS) = 5.86  
TOTAL AREA(ACRES) = 2.45 PEAK FLOW RATE(CFS) = 5.86

\*\*\*\*\*  
FLOW PROCESS FROM NODE 22.00 TO NODE 29.00 IS CODE = 62  
-----

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<<<  
-----

UPSTREAM ELEVATION(FEET) = 766.10 DOWNSTREAM ELEVATION(FEET) = 762.90  
STREET LENGTH(FEET) = 630.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 1  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curb) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 8.71  
\*\*\*STREET FLOW SPLITS OVER STREET-CROWN\*\*\*  
FULL DEPTH(FEET) = 0.52 FLOOD WIDTH(FEET) = 18.00  
FULL HALF-STREET VELOCITY(FEET/SEC.) = 2.29  
SPLIT DEPTH(FEET) = 0.29 SPLIT FLOOD WIDTH(FEET) = 6.41  
SPLIT FLOW(CFS) = 0.85 SPLIT VELOCITY(FEET/SEC.) = 1.41  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:

NOTE: STREET FLOW EXCEEDS TOP OF CURB.  
THE FOLLOWING STREET FLOW RESULTS ARE BASED ON THE ASSUMPTION  
THAT NEGLIBLE FLOW OCCURS OUTSIDE OF THE STREET CHANNEL.  
THAT IS, ALL FLOW ALONG THE PARKWAY, ETC., IS NEGLECTED.

STREET FLOW DEPTH(FEET) = 0.52  
HALFSTREET FLOOD WIDTH(FEET) = 18.00  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.29  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 1.19  
STREET FLOW TRAVEL TIME(MIN.) = 4.58 Tc(MIN.) = 21.07  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.567

SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 2.60 0.27 0.50 86  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 2.60 SUBAREA RUNOFF(CFS) = 5.69  
EFFECTIVE AREA(ACRES) = 5.05 AREA-AVERAGED Fm(INCH/HR) = 0.22  
AREA-AVERAGED Fp(INCH/HR) = 0.45 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 5.05 PEAK FLOW RATE(CFS) = 10.65

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.52 HALFSTREET FLOOD WIDTH(FEET) = 18.00  
FLOW VELOCITY(FEET/SEC.) = 2.29 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.19  
\*NOTE: INITIAL SUBAREA NOMOGRAPH WITH SUBAREA PARAMETERS,  
AND L = 630.0 FT WITH ELEVATION-DROP = 3.2 FT, IS 7.1 CFS,  
WHICH EXCEEDS THE TOP-OF-CURB STREET CAPACITY AT NODE 29.00  
LONGEST FLOWPATH FROM NODE 20.00 TO NODE 29.00 = 1625.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 29.00 TO NODE 29.00 IS CODE = 1  
-----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<<  
-----

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 21.07  
RAINFALL INTENSITY(INCH/HR) = 2.57  
AREA-AVERAGED Fm(INCH/HR) = 0.22  
AREA-AVERAGED Fp(INCH/HR) = 0.45  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 5.05  
TOTAL STREAM AREA(ACRES) = 5.05  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 10.65



\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	21.78	18.02	2.820	0.32( 0.16)	0.50	8.8	24.00
2	10.65	21.07	2.567	0.45( 0.22)	0.50	5.0	20.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	31.87	18.02	2.820	0.36( 0.18)	0.50	13.1	24.00
2	30.36	21.07	2.567	0.36( 0.18)	0.50	13.9	20.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
 PEAK FLOW RATE(CFS) = 31.87 Tc(MIN.) = 18.02  
 EFFECTIVE AREA(ACRES) = 13.12 AREA-AVERAGED Fm(INCH/HR) = 0.18  
 AREA-AVERAGED Fp(INCH/HR) = 0.36 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 13.85  
 LONGEST FLOWPATH FROM NODE 20.00 TO NODE 29.00 = 1625.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 29.00 TO NODE 39.00 IS CODE = 31

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
 =====  
 ELEVATION DATA: UPSTREAM(FEET) = 755.90 DOWNSTREAM(FEET) = 751.00  
 FLOW LENGTH(FEET) = 380.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 27.0 INCH PIPE IS 20.6 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 9.79  
 ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 31.87  
 PIPE TRAVEL TIME(MIN.) = 0.65 Tc(MIN.) = 18.66  
 LONGEST FLOWPATH FROM NODE 20.00 TO NODE 39.00 = 2005.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 39.00 TO NODE 39.00 IS CODE = 12

>>>>CLEAR MEMORY BANK # 1 <<<<<  
 =====

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 39.00 TO NODE 39.00 IS CODE = 12

>>>>CLEAR MEMORY BANK # 2 <<<<<  
 =====

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 39.00 TO NODE 39.00 IS CODE = 1

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 =====  
 TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
 TIME OF CONCENTRATION(MIN.) = 18.66  
 RAINFALL INTENSITY(INCH/HR) = 2.76  
 AREA-AVERAGED Fm(INCH/HR) = 0.18  
 AREA-AVERAGED Fp(INCH/HR) = 0.36  
 AREA-AVERAGED Ap = 0.50  
 EFFECTIVE STREAM AREA(ACRES) = 13.12  
 TOTAL STREAM AREA(ACRES) = 13.85  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 31.87

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 30.00 TO NODE 32.00 IS CODE = 21

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
 =====  
 INITIAL SUBAREA FLOW-LENGTH(FEET) = 1000.00  
 ELEVATION DATA: UPSTREAM(FEET) = 771.70 DOWNSTREAM(FEET) = 763.40  
  
 $Tc = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] * 0.20$   
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.074  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.019  
 SUBAREA Tc AND LOSS RATE DATA(AMC III):  

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
RESIDENTIAL						
"5-7 DWELLINGS/ACRE"	C	2.23	0.27	0.50	86	16.07
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27						
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50						
SUBAREA RUNOFF(CFS) = 5.79						
TOTAL AREA(ACRES) = 2.23 PEAK FLOW RATE(CFS) = 5.79						

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 32.00 TO NODE 32.00 IS CODE = 81

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<  
 =====  
 MAINLINE Tc(MIN) = 16.07  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.019  
 SUBAREA LOSS RATE DATA(AMC III):  

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
RESIDENTIAL					
"5-7 DWELLINGS/ACRE"	A	1.08	0.80	0.50	52
RESIDENTIAL					
"5-7 DWELLINGS/ACRE"	C	0.50	0.27	0.50	86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.63					
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50					

SUBAREA AREA(ACRES) = 1.58 SUBAREA RUNOFF(CFS) = 3.85  
EFFECTIVE AREA(ACRES) = 3.81 AREA-AVERAGED Fm(INCH/HR) = 0.21  
AREA-AVERAGED Fp(INCH/HR) = 0.42 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 3.81 PEAK FLOW RATE(CFS) = 9.63

\*\*\*\*\*  
FLOW PROCESS FROM NODE 32.00 TO NODE 32.10 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

ELEVATION DATA: UPSTREAM(FEET) =	756.40	DOWNSTREAM(FEET) =	754.00
FLOW LENGTH(FEET) =	270.00	MANNING'S N =	0.013
DEPTH OF FLOW IN	18.0 INCH PIPE IS	14.7 INCHES	
PIPE-FLOW VELOCITY(FEET/SEC.) =	6.23		
ESTIMATED PIPE DIAMETER(INCH) =	18.00	NUMBER OF PIPES =	1
PIPE-FLOW(CFS) =	9.63		
PIPE TRAVEL TIME(MIN.) =	0.72	Tc(MIN.) =	16.80
LONGEST FLOWPATH FROM NODE	30.00 TO NODE	32.10 =	1270.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 32.10 TO NODE 32.10 IS CODE = 81  
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

MAINLINE Tc(MIN) =	16.80				
* 100 YEAR RAINFALL INTENSITY(INCH/HR) =	2.941				
SUBAREA LOSS RATE DATA(AMC III):					
DEVELOPMENT TYPE/	SCS SOIL	AREA	Fp	Ap	SCS
LAND USE	GROUP	(ACRES)	(INCH/HR)	(DECIMAL)	CN
RESIDENTIAL					
"5-7 DWELLINGS/ACRE"	A	2.36	0.80	0.50	52
RESIDENTIAL					
"5-7 DWELLINGS/ACRE"	C	0.89	0.27	0.50	86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =	0.65				
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =	0.50				
SUBAREA AREA(ACRES) =	3.25	SUBAREA RUNOFF(CFS) =	7.65		
EFFECTIVE AREA(ACRES) =	7.06	AREA-AVERAGED Fm(INCH/HR) =	0.26		
AREA-AVERAGED Fp(INCH/HR) =	0.53	AREA-AVERAGED Ap =	0.50		
TOTAL AREA(ACRES) =	7.06	PEAK FLOW RATE(CFS) =	17.01		

\*\*\*\*\*  
FLOW PROCESS FROM NODE 32.10 TO NODE 34.00 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

ELEVATION DATA: UPSTREAM(FEET) =	754.00	DOWNSTREAM(FEET) =	752.60
FLOW LENGTH(FEET) =	295.00	MANNING'S N =	0.013
DEPTH OF FLOW IN	27.0 INCH PIPE IS	18.6 INCHES	
PIPE-FLOW VELOCITY(FEET/SEC.) =	5.83		
ESTIMATED PIPE DIAMETER(INCH) =	27.00	NUMBER OF PIPES =	1
PIPE-FLOW(CFS) =	17.01		
PIPE TRAVEL TIME(MIN.) =	0.84	Tc(MIN.) =	17.64
LONGEST FLOWPATH FROM NODE	30.00 TO NODE	34.00 =	1565.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 34.00 TO NODE 34.00 IS CODE = 81  
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

MAINLINE Tc(MIN) =	17.64				
* 100 YEAR RAINFALL INTENSITY(INCH/HR) =	2.856				
SUBAREA LOSS RATE DATA(AMC III):					
DEVELOPMENT TYPE/	SCS SOIL	AREA	Fp	Ap	SCS
LAND USE	GROUP	(ACRES)	(INCH/HR)	(DECIMAL)	CN
RESIDENTIAL					
"5-7 DWELLINGS/ACRE"	A	1.59	0.80	0.50	52
RESIDENTIAL					
"5-7 DWELLINGS/ACRE"	C	3.88	0.27	0.50	86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) =	0.42				
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap =	0.50				
SUBAREA AREA(ACRES) =	5.47	SUBAREA RUNOFF(CFS) =	13.01		
EFFECTIVE AREA(ACRES) =	12.53	AREA-AVERAGED Fm(INCH/HR) =	0.24		
AREA-AVERAGED Fp(INCH/HR) =	0.48	AREA-AVERAGED Ap =	0.50		
TOTAL AREA(ACRES) =	12.53	PEAK FLOW RATE(CFS) =	29.48		

\*\*\*\*\*  
FLOW PROCESS FROM NODE 34.00 TO NODE 39.00 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

=====

ELEVATION DATA: UPSTREAM(FEET) =	752.60	DOWNSTREAM(FEET) =	751.00
FLOW LENGTH(FEET) =	440.00	MANNING'S N =	0.013
DEPTH OF FLOW IN	33.0 INCH PIPE IS	25.6 INCHES	
PIPE-FLOW VELOCITY(FEET/SEC.) =	5.95		
ESTIMATED PIPE DIAMETER(INCH) =	33.00	NUMBER OF PIPES =	1
PIPE-FLOW(CFS) =	29.48		
PIPE TRAVEL TIME(MIN.) =	1.23	Tc(MIN.) =	18.87
LONGEST FLOWPATH FROM NODE	30.00 TO NODE	39.00 =	2005.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 39.00 TO NODE 39.00 IS CODE = 1  
-----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====

TOTAL NUMBER OF STREAMS =	2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:	
TIME OF CONCENTRATION(MIN.) =	18.87
RAINFALL INTENSITY(INCH/HR) =	2.74
AREA-AVERAGED Fm(INCH/HR) =	0.24

AREA-AVERAGED Fp(INCH/HR) = 0.48  
 AREA-AVERAGED Ap = 0.50  
 EFFECTIVE STREAM AREA(ACRES) = 12.53  
 TOTAL STREAM AREA(ACRES) = 12.53  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 29.48

**\*\* CONFLUENCE DATA \*\***

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	31.87	18.66	2.761	0.36( 0.18)	0.50	13.1	24.00
1	30.36	21.72	2.521	0.36( 0.18)	0.50	13.9	20.00
2	29.48	18.87	2.742	0.48( 0.24)	0.50	12.5	30.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

**\*\* PEAK FLOW RATE TABLE \*\***

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	61.24	18.66	2.761	0.42( 0.21)	0.50	25.5	24.00
2	61.25	18.87	2.742	0.42( 0.21)	0.50	25.7	30.00
3	57.23	21.72	2.521	0.42( 0.21)	0.50	26.4	20.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
 PEAK FLOW RATE(CFS) = 61.25 Tc(MIN.) = 18.87  
 EFFECTIVE AREA(ACRES) = 25.70 AREA-AVERAGED Fp(INCH/HR) = 0.21  
 AREA-AVERAGED Fp(INCH/HR) = 0.42 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 26.38  
 LONGEST FLOWPATH FROM NODE 20.00 TO NODE 39.00 = 2005.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 39.00 TO NODE 69.00 IS CODE = 31

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
 =====  
 ELEVATION DATA: UPSTREAM(FEET) = 751.00 DOWNSTREAM(FEET) = 746.50  
 FLOW LENGTH(FEET) = 170.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 30.0 INCH PIPE IS 23.2 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 15.07  
 ESTIMATED PIPE DIAMETER(INCH) = 30.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 61.25  
 PIPE TRAVEL TIME(MIN.) = 0.19 Tc(MIN.) = 19.06  
 LONGEST FLOWPATH FROM NODE 20.00 TO NODE 69.00 = 2175.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 69.00 TO NODE 69.00 IS CODE = 11

>>>>CONFLUENCE MEMORY BANK # 3 WITH THE MAIN-STREAM MEMORY<<<<<  
 =====

**\*\* MAIN STREAM CONFLUENCE DATA \*\***

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	61.24	18.85	2.744	0.42( 0.21)	0.50	25.5	24.00
2	61.25	19.06	2.726	0.42( 0.21)	0.50	25.7	30.00
3	57.23	21.91	2.507	0.42( 0.21)	0.50	26.4	20.00

LONGEST FLOWPATH FROM NODE 20.00 TO NODE 69.00 = 2175.00 FEET.

**\*\* MEMORY BANK # 3 CONFLUENCE DATA \*\***

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	84.37	10.59	3.878	0.56( 0.28)	0.49	24.4	63.00
2	84.42	10.62	3.873	0.56( 0.28)	0.49	24.4	60.00
3	94.35	17.58	2.861	0.58( 0.28)	0.49	38.4	58.00
4	94.63	17.93	2.828	0.58( 0.28)	0.49	39.0	7.00
5	94.61	18.02	2.819	0.58( 0.28)	0.49	39.2	10.30
6	94.03	19.51	2.688	0.58( 0.29)	0.49	41.1	43.00
7	94.02	19.52	2.687	0.58( 0.29)	0.49	41.1	40.00
8	85.74	22.73	2.453	0.59( 0.29)	0.49	41.6	1.00

LONGEST FLOWPATH FROM NODE 1.00 TO NODE 69.00 = 3184.00 FEET.

**\*\* PEAK FLOW RATE TABLE \*\***

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	134.18	10.59	3.878	0.51( 0.25)	0.50	38.7	63.00
2	134.27	10.62	3.873	0.51( 0.25)	0.50	38.8	60.00
3	154.11	17.58	2.861	0.52( 0.26)	0.49	62.2	58.00
4	154.81	17.93	2.828	0.52( 0.26)	0.49	63.3	7.00
5	154.89	18.02	2.819	0.52( 0.26)	0.49	63.6	10.30
6	155.53	18.85	2.744	0.52( 0.26)	0.49	65.7	24.00
7	155.46	19.06	2.726	0.52( 0.26)	0.49	66.2	30.00
8	154.65	19.51	2.688	0.52( 0.26)	0.49	66.9	43.00
9	154.63	19.52	2.687	0.52( 0.26)	0.49	66.9	40.00
10	145.09	21.91	2.507	0.52( 0.26)	0.49	67.9	20.00
11	141.61	22.73	2.453	0.52( 0.26)	0.49	68.0	1.00

TOTAL AREA(ACRES) = 68.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
 PEAK FLOW RATE(CFS) = 155.53 Tc(MIN.) = 18.850  
 EFFECTIVE AREA(ACRES) = 65.74 AREA-AVERAGED Fp(INCH/HR) = 0.26  
 AREA-AVERAGED Fp(INCH/HR) = 0.51 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 68.00  
 LONGEST FLOWPATH FROM NODE 1.00 TO NODE 69.00 = 3184.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 69.00 TO NODE 70.00 IS CODE = 31

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
 =====  
 ELEVATION DATA: UPSTREAM(FEET) = 746.50 DOWNSTREAM(FEET) = 744.50  
 FLOW LENGTH(FEET) = 490.00 MANNING'S N = 0.013

DEPTH OF FLOW IN 60.0 INCH PIPE IS 47.1 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 9.40  
 ESTIMATED PIPE DIAMETER(INCH) = 60.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 155.53  
 PIPE TRAVEL TIME(MIN.) = 0.87 Tc(MIN.) = 19.72  
 LONGEST FLOWPATH FROM NODE 1.00 TO NODE 70.00 = 3674.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 70.00 TO NODE 70.00 IS CODE = 1  
 -----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

-----  
 TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
 TIME OF CONCENTRATION(MIN.) = 19.72  
 RAINFALL INTENSITY(INCH/HR) = 2.67  
 AREA-AVERAGED Fm(INCH/HR) = 0.26  
 AREA-AVERAGED Fp(INCH/HR) = 0.52  
 AREA-AVERAGED Ap = 0.49  
 EFFECTIVE STREAM AREA(ACRES) = 65.74  
 TOTAL STREAM AREA(ACRES) = 68.00  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 155.53

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 70.10 TO NODE 70.00 IS CODE = 21  
 -----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
 >>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

-----  
 INITIAL SUBAREA FLOW-LENGTH(FEET) = 928.00  
 ELEVATION DATA: UPSTREAM(FEET) = 766.30 DOWNSTREAM(FEET) = 755.80

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 11.459  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.699

SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN	Tc (MIN.)
RESIDENTIAL						
"5-7 DWELLINGS/ACRE"	C	0.64	0.27	0.50	86	14.66
COMMERCIAL	C	2.98	0.27	0.10	86	11.46
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27						
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.17						
SUBAREA RUNOFF(CFS) = 11.90						
TOTAL AREA(ACRES) = 3.62 PEAK FLOW RATE(CFS) = 11.90						

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 70.00 TO NODE 70.00 IS CODE = 81  
 -----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

-----  
 MAINLINE Tc(MIN) = 11.46  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.699

SUBAREA LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	Fp (INCH/HR)	Ap (DECIMAL)	SCS CN
PUBLIC PARK	C	1.07	0.27	0.85	86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27					
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.85					
SUBAREA AREA(ACRES) = 1.07 SUBAREA RUNOFF(CFS) = 3.34					
EFFECTIVE AREA(ACRES) = 4.69 AREA-AVERAGED Fm(INCH/HR) = 0.09					
AREA-AVERAGED Fp(INCH/HR) = 0.27 AREA-AVERAGED Ap = 0.33					
TOTAL AREA(ACRES) = 4.69 PEAK FLOW RATE(CFS) = 15.24					

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 70.00 TO NODE 70.00 IS CODE = 1  
 -----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

-----  
 TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 11.46  
 RAINFALL INTENSITY(INCH/HR) = 3.70  
 AREA-AVERAGED Fm(INCH/HR) = 0.09  
 AREA-AVERAGED Fp(INCH/HR) = 0.27  
 AREA-AVERAGED Ap = 0.33  
 EFFECTIVE STREAM AREA(ACRES) = 4.69  
 TOTAL STREAM AREA(ACRES) = 4.69  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 15.24

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	134.18	11.49	3.693	0.51( 0.25)	0.50	38.7	63.00
1	134.27	11.52	3.688	0.51( 0.25)	0.50	38.8	60.00
1	154.11	18.45	2.780	0.52( 0.26)	0.49	62.2	58.00
1	154.81	18.80	2.749	0.52( 0.26)	0.49	63.3	7.00
1	154.89	18.89	2.741	0.52( 0.26)	0.49	63.6	10.30
1	155.53	19.72	2.671	0.52( 0.26)	0.49	65.7	24.00
1	155.46	19.93	2.654	0.52( 0.26)	0.49	66.2	30.00
1	154.65	20.38	2.619	0.52( 0.26)	0.49	66.9	43.00
1	154.63	20.39	2.618	0.52( 0.26)	0.49	66.9	40.00
1	145.09	22.78	2.449	0.52( 0.26)	0.49	67.9	20.00
1	141.61	23.61	2.398	0.52( 0.26)	0.49	68.0	1.00
2	15.24	11.46	3.699	0.27( 0.09)	0.33	4.7	70.10

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
------------------	------------	--------------	------------------------	---------------------	----	---------------	-------------------

1	149.28	11.46	3.699	0.49( 0.23)	0.48	43.3	70.10
2	149.39	11.49	3.693	0.49( 0.23)	0.48	43.4	63.00
3	149.47	11.52	3.688	0.49( 0.23)	0.48	43.5	60.00
4	165.47	18.45	2.780	0.51( 0.24)	0.48	66.9	58.00
5	166.03	18.80	2.749	0.51( 0.24)	0.48	68.0	7.00
6	166.09	18.89	2.741	0.51( 0.24)	0.48	68.2	10.30
7	166.43	19.72	2.671	0.51( 0.24)	0.48	70.4	24.00
8	166.29	19.93	2.654	0.51( 0.25)	0.48	70.9	30.00
9	165.32	20.38	2.619	0.51( 0.25)	0.48	71.6	43.00
10	165.30	20.39	2.618	0.51( 0.25)	0.48	71.6	40.00
11	155.05	22.78	2.449	0.51( 0.25)	0.48	72.6	20.00
12	151.35	23.61	2.398	0.51( 0.25)	0.48	72.7	1.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 166.43 Tc(MIN.) = 19.72  
EFFECTIVE AREA(ACRES) = 70.43 AREA-AVERAGED Fm(INCH/HR) = 0.24  
AREA-AVERAGED Fp(INCH/HR) = 0.51 AREA-AVERAGED Ap = 0.48  
TOTAL AREA(ACRES) = 72.69  
LONGEST FLOWPATH FROM NODE 1.00 TO NODE 70.00 = 3674.00 FEET.

-----  
South-West Area
-----

\*\*\*\*\*  
FLOW PROCESS FROM NODE 100.00 TO NODE 102.00 IS CODE = 21  
-----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
-----  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 960.00  
ELEVATION DATA: UPSTREAM(FEET) = 764.00 DOWNSTREAM(FEET) = 755.70  
  
Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.613  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.960  
SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
RESIDENTIAL  
"3-4 DWELLINGS/ACRE" A 2.32 0.80 0.60 52 16.61  
RESIDENTIAL  
"3-4 DWELLINGS/ACRE" C 5.06 0.27 0.60 86 16.61  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.44  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60  
SUBAREA RUNOFF(CFS) = 17.92  
TOTAL AREA(ACRES) = 7.38 PEAK FLOW RATE(CFS) = 17.92

\*\*\*\*\*  
FLOW PROCESS FROM NODE 102.00 TO NODE 102.00 IS CODE = 81  
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<  
-----  
MAINLINE Tc(MIN) = 16.61  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.960  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"3-4 DWELLINGS/ACRE" A 2.14 0.80 0.60 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60  
SUBAREA AREA(ACRES) = 2.14 SUBAREA RUNOFF(CFS) = 4.78  
EFFECTIVE AREA(ACRES) = 9.52 AREA-AVERAGED Fm(INCH/HR) = 0.31  
AREA-AVERAGED Fp(INCH/HR) = 0.52 AREA-AVERAGED Ap = 0.60  
TOTAL AREA(ACRES) = 9.52 PEAK FLOW RATE(CFS) = 22.70

\*\*\*\*\*  
FLOW PROCESS FROM NODE 102.00 TO NODE 103.00 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
-----  
ELEVATION DATA: UPSTREAM(FEET) = 748.70 DOWNSTREAM(FEET) = 746.80  
FLOW LENGTH(FEET) = 480.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 30.0 INCH PIPE IS 22.3 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.80  
ESTIMATED PIPE DIAMETER(INCH) = 30.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 22.70  
PIPE TRAVEL TIME(MIN.) = 1.38 Tc(MIN.) = 17.99  
LONGEST FLOWPATH FROM NODE 100.00 TO NODE 103.00 = 1440.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 103.00 TO NODE 103.00 IS CODE = 81  
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<  
-----  
MAINLINE Tc(MIN) = 17.99  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.822  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.44 0.80 0.50 52  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 1.82 0.27 0.50 86  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.50  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 3.26 SUBAREA RUNOFF(CFS) = 7.54  
EFFECTIVE AREA(ACRES) = 12.78 AREA-AVERAGED Fm(INCH/HR) = 0.30  
AREA-AVERAGED Fp(INCH/HR) = 0.51 AREA-AVERAGED Ap = 0.57

TOTAL AREA(ACRES) = 12.78 PEAK FLOW RATE(CFS) = 29.06

\*\*\*\*\*  
FLOW PROCESS FROM NODE 103.00 TO NODE 109.00 IS CODE = 31

-----  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
-----  
ELEVATION DATA: UPSTREAM(FEET) = 746.80 DOWNSTREAM(FEET) = 745.90  
FLOW LENGTH(FEET) = 230.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 33.0 INCH PIPE IS 24.5 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.14  
ESTIMATED PIPE DIAMETER(INCH) = 33.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 29.06  
PIPE TRAVEL TIME(MIN.) = 0.62 Tc(MIN.) = 18.62  
LONGEST FLOWPATH FROM NODE 100.00 TO NODE 109.00 = 1670.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 109.00 TO NODE 109.00 IS CODE = 81

-----  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<  
-----  
MAINLINE Tc(MIN) = 18.62  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.765  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 1.81 0.80 0.50 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 1.81 SUBAREA RUNOFF(CFS) = 3.86  
EFFECTIVE AREA(ACRES) = 14.59 AREA-AVERAGED Fm(INCH/HR) = 0.31  
AREA-AVERAGED Fp(INCH/HR) = 0.55 AREA-AVERAGED Ap = 0.57  
TOTAL AREA(ACRES) = 14.59 PEAK FLOW RATE(CFS) = 32.26

\*\*\*\*\*  
FLOW PROCESS FROM NODE 109.00 TO NODE 109.00 IS CODE = 1

-----  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
-----  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 18.62  
RAINFALL INTENSITY(INCH/HR) = 2.76  
AREA-AVERAGED Fm(INCH/HR) = 0.31  
AREA-AVERAGED Fp(INCH/HR) = 0.55  
AREA-AVERAGED Ap = 0.57  
EFFECTIVE STREAM AREA(ACRES) = 14.59  
TOTAL STREAM AREA(ACRES) = 14.59  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 32.26

\*\*\*\*\*  
FLOW PROCESS FROM NODE 104.00 TO NODE 105.00 IS CODE = 21

-----  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
-----  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 710.00  
ELEVATION DATA: UPSTREAM(FEET) = 761.80 DOWNSTREAM(FEET) = 756.60  
  
Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 15.221  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.120  
SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
RESIDENTIAL  
"3-4 DWELLINGS/ACRE" C 2.45 0.27 0.60 86 15.22  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60  
SUBAREA RUNOFF(CFS) = 6.52  
TOTAL AREA(ACRES) = 2.45 PEAK FLOW RATE(CFS) = 6.52

\*\*\*\*\*  
FLOW PROCESS FROM NODE 105.00 TO NODE 109.00 IS CODE = 62

-----  
>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<<  
-----  
UPSTREAM ELEVATION(FEET) = 756.60 DOWNSTREAM ELEVATION(FEET) = 753.00  
STREET LENGTH(FEET) = 600.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020  
  
SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 10.68  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.46  
HALFSTREET FLOOD WIDTH(FEET) = 14.84  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.23  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 1.02  
STREET FLOW TRAVEL TIME(MIN.) = 4.48 Tc(MIN.) = 19.70  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.672  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL

"3-4 DWELLINGS/ACRE" A 2.55 0.80 0.60 52  
RESIDENTIAL  
"3-4 DWELLINGS/ACRE" C 1.44 0.27 0.60 86  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.61  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60  
SUBAREA AREA(ACRES) = 3.99 SUBAREA RUNOFF(CFS) = 8.29  
EFFECTIVE AREA(ACRES) = 6.44 AREA-AVERAGED Fm(INCH/HR) = 0.29  
AREA-AVERAGED Fp(INCH/HR) = 0.48 AREA-AVERAGED Ap = 0.60  
TOTAL AREA(ACRES) = 6.44 PEAK FLOW RATE(CFS) = 13.82

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.49 HALFSTREET FLOOD WIDTH(FEET) = 16.53  
FLOW VELOCITY(FEET/SEC.) = 2.36 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.16  
LONGEST FLOWPATH FROM NODE 104.00 TO NODE 109.00 = 1310.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 109.00 TO NODE 109.00 IS CODE = 1

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

-----  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 19.70  
RAINFALL INTENSITY(INCH/HR) = 2.67  
AREA-AVERAGED Fm(INCH/HR) = 0.29  
AREA-AVERAGED Fp(INCH/HR) = 0.48  
AREA-AVERAGED Ap = 0.60  
EFFECTIVE STREAM AREA(ACRES) = 6.44  
TOTAL STREAM AREA(ACRES) = 6.44  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 13.82

\*\* CONFLUENCE DATA \*\*  
STREAM Q Tc Intensity Fp(Fm) Ap Ae HEADWATER  
NUMBER (CFS) (MIN.) (INCH/HR) (INCH/HR) (ACRES) NODE  
1 32.26 18.62 2.765 0.55( 0.31) 0.57 14.6 100.00  
2 13.82 19.70 2.672 0.48( 0.29) 0.60 6.4 104.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*  
STREAM Q Tc Intensity Fp(Fm) Ap Ae HEADWATER  
NUMBER (CFS) (MIN.) (INCH/HR) (INCH/HR) (ACRES) NODE  
1 45.82 18.62 2.765 0.53( 0.30) 0.58 20.7 100.00  
2 44.86 19.70 2.672 0.52( 0.30) 0.58 21.0 104.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 45.82 Tc(MIN.) = 18.62  
EFFECTIVE AREA(ACRES) = 20.67 AREA-AVERAGED Fm(INCH/HR) = 0.30  
AREA-AVERAGED Fp(INCH/HR) = 0.53 AREA-AVERAGED Ap = 0.58  
TOTAL AREA(ACRES) = 21.03  
LONGEST FLOWPATH FROM NODE 100.00 TO NODE 109.00 = 1670.00 FEET.

-----  
South-East Area  
-----

\*\*\*\*\*  
FLOW PROCESS FROM NODE 200.00 TO NODE 202.00 IS CODE = 21

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

-----  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 810.00  
ELEVATION DATA: UPSTREAM(FEET) = 764.00 DOWNSTREAM(FEET) = 757.70

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 14.968  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.151  
SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 4.60 0.80 0.50 52 14.97  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 4.60 0.27 0.50 86 14.97  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.53  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA RUNOFF(CFS) = 23.88  
TOTAL AREA(ACRES) = 9.20 PEAK FLOW RATE(CFS) = 23.88

\*\*\*\*\*  
FLOW PROCESS FROM NODE 202.00 TO NODE 203.00 IS CODE = 31

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

-----  
ELEVATION DATA: UPSTREAM(FEET) = 750.70 DOWNSTREAM(FEET) = 748.70  
FLOW LENGTH(FEET) = 250.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 27.0 INCH PIPE IS 19.7 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 7.67  
ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 23.88  
PIPE TRAVEL TIME(MIN.) = 0.54 Tc(MIN.) = 15.51  
LONGEST FLOWPATH FROM NODE 200.00 TO NODE 203.00 = 1060.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 203.00 TO NODE 203.00 IS CODE = 81

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

```

=====
MAINLINE Tc(MIN) = 15.51
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.085
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap      SCS
LAND USE              GROUP  (ACRES)  (INCH/HR) (DECIMAL) CN
RESIDENTIAL
"3-4 DWELLINGS/ACRE"   A      1.38     0.80     0.60     52
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   C      0.70     0.27     0.50     86
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.64
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.57
SUBAREA AREA(ACRES) = 2.08      SUBAREA RUNOFF(CFS) = 5.10
EFFECTIVE AREA(ACRES) = 11.28   AREA-AVERAGED Fm(INCH/HR) = 0.28
AREA-AVERAGED Fp(INCH/HR) = 0.56 AREA-AVERAGED Ap = 0.51
TOTAL AREA(ACRES) = 11.28      PEAK FLOW RATE(CFS) = 28.43

*****
FLOW PROCESS FROM NODE 203.00 TO NODE 207.00 IS CODE = 31
-----
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
-----
ELEVATION DATA: UPSTREAM(FEET) = 748.70 DOWNSTREAM(FEET) = 747.80
FLOW LENGTH(FEET) = 210.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 33.0 INCH PIPE IS 23.2 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.37
ESTIMATED PIPE DIAMETER(INCH) = 33.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 28.43
PIPE TRAVEL TIME(MIN.) = 0.55 Tc(MIN.) = 16.06
LONGEST FLOWPATH FROM NODE 200.00 TO NODE 207.00 = 1270.00 FEET.

*****
FLOW PROCESS FROM NODE 207.00 TO NODE 207.00 IS CODE = 81
-----
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<
-----
MAINLINE Tc(MIN) = 16.06
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.021
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap      SCS
LAND USE              GROUP  (ACRES)  (INCH/HR) (DECIMAL) CN
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   A      2.64     0.80     0.50     52
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA AREA(ACRES) = 2.64      SUBAREA RUNOFF(CFS) = 6.23
EFFECTIVE AREA(ACRES) = 13.92   AREA-AVERAGED Fm(INCH/HR) = 0.31
AREA-AVERAGED Fp(INCH/HR) = 0.60 AREA-AVERAGED Ap = 0.51
TOTAL AREA(ACRES) = 13.92      PEAK FLOW RATE(CFS) = 34.01

*****
FLOW PROCESS FROM NODE 207.00 TO NODE 207.10 IS CODE = 31
-----
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<
-----
ELEVATION DATA: UPSTREAM(FEET) = 747.80 DOWNSTREAM(FEET) = 745.90
FLOW LENGTH(FEET) = 320.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 33.0 INCH PIPE IS 23.5 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 7.51
ESTIMATED PIPE DIAMETER(INCH) = 33.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 34.01
PIPE TRAVEL TIME(MIN.) = 0.71 Tc(MIN.) = 16.77
LONGEST FLOWPATH FROM NODE 200.00 TO NODE 207.10 = 1590.00 FEET.

*****
FLOW PROCESS FROM NODE 207.10 TO NODE 207.10 IS CODE = 1
-----
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<
-----
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:
TIME OF CONCENTRATION(MIN.) = 16.77
RAINFALL INTENSITY(INCH/HR) = 2.94
AREA-AVERAGED Fm(INCH/HR) = 0.31
AREA-AVERAGED Fp(INCH/HR) = 0.60
AREA-AVERAGED Ap = 0.51
EFFECTIVE STREAM AREA(ACRES) = 13.92
TOTAL STREAM AREA(ACRES) = 13.92
PEAK FLOW RATE(CFS) AT CONFLUENCE = 34.01

*****
FLOW PROCESS FROM NODE 204.00 TO NODE 204.10 IS CODE = 21
-----
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<
>>>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
-----
INITIAL SUBAREA FLOW-LENGTH(FEET) = 900.00
ELEVATION DATA: UPSTREAM(FEET) = 761.20 DOWNSTREAM(FEET) = 754.20

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 15.613
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.073
SUBAREA Tc AND LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/      SCS SOIL  AREA      Fp        Ap      SCS  Tc
LAND USE              GROUP  (ACRES)  (INCH/HR) (DECIMAL) CN (MIN.)
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   A      2.70     0.80     0.50     52  15.61
RESIDENTIAL
"5-7 DWELLINGS/ACRE"   C      0.70     0.27     0.50     86  15.61
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.69
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50

```



SUBAREA RUNOFF(CFS) = 8.35  
TOTAL AREA(ACRES) = 3.40 PEAK FLOW RATE(CFS) = 8.35

\*\*\*\*\*  
FLOW PROCESS FROM NODE 204.10 TO NODE 207.10 IS CODE = 62

-----  
>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<<

=====

UPSTREAM ELEVATION(FEET) = 754.20 DOWNSTREAM ELEVATION(FEET) = 752.90  
STREET LENGTH(FEET) = 200.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 9.39  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.44  
HALFSTREET FLOOD WIDTH(FEET) = 13.84  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.23  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.97  
STREET FLOW TRAVEL TIME(MIN.) = 1.50 Tc(MIN.) = 17.11  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.909

SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" C 0.83 0.27 0.50 86  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.27  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 0.83 SUBAREA RUNOFF(CFS) = 2.07  
EFFECTIVE AREA(ACRES) = 4.23 AREA-AVERAGED Fm(INCH/HR) = 0.30  
AREA-AVERAGED Fp(INCH/HR) = 0.61 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 4.23 PEAK FLOW RATE(CFS) = 9.92

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.44 HALFSTREET FLOOD WIDTH(FEET) = 14.16  
FLOW VELOCITY(FEET/SEC.) = 2.26 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.00  
LONGEST FLOWPATH FROM NODE 204.00 TO NODE 207.10 = 1100.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 207.10 TO NODE 207.10 IS CODE = 1

-----  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<

=====

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 17.11  
RAINFALL INTENSITY(INCH/HR) = 2.91  
AREA-AVERAGED Fm(INCH/HR) = 0.30  
AREA-AVERAGED Fp(INCH/HR) = 0.61  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 4.23  
TOTAL STREAM AREA(ACRES) = 4.23  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 9.92

\*\* CONFLUENCE DATA \*\*  
STREAM Q Tc Intensity Fp(Fm) Ap Ae HEADWATER  
NUMBER (CFS) (MIN.) (INCH/HR) (INCH/HR) (ACRES) NODE  
1 34.01 16.77 2.944 0.60( 0.31) 0.51 13.9 200.00  
2 9.92 17.11 2.909 0.61( 0.30) 0.50 4.2 204.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*  
STREAM Q Tc Intensity Fp(Fm) Ap Ae HEADWATER  
NUMBER (CFS) (MIN.) (INCH/HR) (INCH/HR) (ACRES) NODE  
1 43.86 16.77 2.944 0.60( 0.31) 0.51 18.1 200.00  
2 43.48 17.11 2.909 0.60( 0.31) 0.51 18.1 204.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 43.86 Tc(MIN.) = 16.77  
EFFECTIVE AREA(ACRES) = 18.07 AREA-AVERAGED Fm(INCH/HR) = 0.31  
AREA-AVERAGED Fp(INCH/HR) = 0.60 AREA-AVERAGED Ap = 0.51  
TOTAL AREA(ACRES) = 18.15  
LONGEST FLOWPATH FROM NODE 200.00 TO NODE 207.10 = 1590.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 207.10 TO NODE 220.00 IS CODE = 81

-----  
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

MAINLINE Tc(MIN) = 16.77  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.944  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"3-4 DWELLINGS/ACRE" A 3.79 0.80 0.60 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60  
SUBAREA AREA(ACRES) = 3.79 SUBAREA RUNOFF(CFS) = 8.41  
EFFECTIVE AREA(ACRES) = 21.86 AREA-AVERAGED Fm(INCH/HR) = 0.34  
AREA-AVERAGED Fp(INCH/HR) = 0.64 AREA-AVERAGED Ap = 0.52  
TOTAL AREA(ACRES) = 21.94 PEAK FLOW RATE(CFS) = 51.31

```

*****
FLOW PROCESS FROM NODE 220.00 TO NODE 220.00 IS CODE = 1
-----
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<
=====
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:
TIME OF CONCENTRATION(MIN.) = 16.77
RAINFALL INTENSITY(INCH/HR) = 2.94
AREA-AVERAGED Fm(INCH/HR) = 0.34
AREA-AVERAGED Fp(INCH/HR) = 0.64
AREA-AVERAGED Ap = 0.52
EFFECTIVE STREAM AREA(ACRES) = 21.86
TOTAL STREAM AREA(ACRES) = 21.94
PEAK FLOW RATE(CFS) AT CONFLUENCE = 51.31
*****

FLOW PROCESS FROM NODE 217.00 TO NODE 218.00 IS CODE = 21
-----
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
=====
INITIAL SUBAREA FLOW-LENGTH(FEET) = 995.00
ELEVATION DATA: UPSTREAM(FEET) = 764.30 DOWNSTREAM(FEET) = 756.50

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 16.226
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.002
SUBAREA Tc AND LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)
RESIDENTIAL
"5-7 DWELLINGS/ACRE" A 1.71 0.80 0.50 52 16.23
RESIDENTIAL
"5-7 DWELLINGS/ACRE" C 1.30 0.27 0.50 86 16.23
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.57
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50
SUBAREA RUNOFF(CFS) = 7.36
TOTAL AREA(ACRES) = 3.01 PEAK FLOW RATE(CFS) = 7.36
*****

FLOW PROCESS FROM NODE 218.00 TO NODE 220.00 IS CODE = 62
-----
>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>(STREET TABLE SECTION # 1 USED)<<<<
=====
UPSTREAM ELEVATION(FEET) = 756.50 DOWNSTREAM ELEVATION(FEET) = 750.70
STREET LENGTH(FEET) = 835.00 CURB HEIGHT(INCHES) = 6.0
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00
INSIDE STREET CROSSFALL(DECIMAL) = 0.020
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curbs) = 0.0150

**TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 12.78
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:
STREET FLOW DEPTH(FEET) = 0.47
HALFSTREET FLOOD WIDTH(FEET) = 15.53
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.46
PRODUCT OF DEPTH&VELOCITY(FT*FT/SEC.) = 1.15
STREET FLOW TRAVEL TIME(MIN.) = 5.66 Tc(MIN.) = 21.89
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.509
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN
RESIDENTIAL
"3-4 DWELLINGS/ACRE" A 5.90 0.80 0.60 52
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60
SUBAREA AREA(ACRES) = 5.90 SUBAREA RUNOFF(CFS) = 10.79
EFFECTIVE AREA(ACRES) = 8.91 AREA-AVERAGED Fm(INCH/HR) = 0.41
AREA-AVERAGED Fp(INCH/HR) = 0.73 AREA-AVERAGED Ap = 0.57
TOTAL AREA(ACRES) = 8.91 PEAK FLOW RATE(CFS) = 16.81

END OF SUBAREA STREET FLOW HYDRAULICS:
DEPTH(FEET) = 0.51 HALFSTREET FLOOD WIDTH(FEET) = 17.34
FLOW VELOCITY(FEET/SEC.) = 2.63 DEPTH*VELOCITY(FT*FT/SEC.) = 1.33
LONGEST FLOWPATH FROM NODE 217.00 TO NODE 220.00 = 1830.00 FEET.
*****

FLOW PROCESS FROM NODE 220.00 TO NODE 220.00 IS CODE = 1
-----
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<
=====
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:
TIME OF CONCENTRATION(MIN.) = 21.89
RAINFALL INTENSITY(INCH/HR) = 2.51
AREA-AVERAGED Fm(INCH/HR) = 0.41
AREA-AVERAGED Fp(INCH/HR) = 0.73
AREA-AVERAGED Ap = 0.57
EFFECTIVE STREAM AREA(ACRES) = 8.91
TOTAL STREAM AREA(ACRES) = 8.91
PEAK FLOW RATE(CFS) AT CONFLUENCE = 16.81

** CONFLUENCE DATA **
STREAM Q Tc Intensity Fp(Fm) Ap Ae HEADWATER
NUMBER (CFS) (MIN.) (INCH/HR) (INCH/HR) (ACRES) NODE
1 51.31 16.77 2.94 0.64( 0.34) 0.52 21.9 200.00

```

1	50.81	17.11	2.909	0.64( 0.34)	0.52	21.9	204.00
2	16.81	21.89	2.509	0.73( 0.41)	0.57	8.9	217.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap (ACRES)	Ae (ACRES)	HEADWATER NODE
1	66.86	16.77	2.944	0.66( 0.35)	0.53	28.7	200.00
2	66.46	17.11	2.909	0.66( 0.35)	0.53	28.9	204.00
3	59.73	21.89	2.509	0.67( 0.36)	0.54	30.8	217.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 66.86 Tc(MIN.) = 16.77  
EFFECTIVE AREA(ACRES) = 28.68 AREA-AVERAGED Fm(INCH/HR) = 0.35  
AREA-AVERAGED Fp(INCH/HR) = 0.66 AREA-AVERAGED Ap = 0.53  
TOTAL AREA(ACRES) = 30.85  
LONGEST FLOWPATH FROM NODE 217.00 TO NODE 220.00 = 1830.00 FEET.

```

-----
| North-East Area |
|-----|

```

\*\*\*\*\*  
FLOW PROCESS FROM NODE 308.00 TO NODE 309.00 IS CODE = 21  
-----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
-----  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 830.00  
ELEVATION DATA: UPSTREAM(FEET) = 774.10 DOWNSTREAM(FEET) = 767.10

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 14.872  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.164  
SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 3.73 0.80 0.50 52 14.87  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA RUNOFF(CFS) = 9.28  
TOTAL AREA(ACRES) = 3.73 PEAK FLOW RATE(CFS) = 9.28

\*\*\*\*\*  
FLOW PROCESS FROM NODE 309.00 TO NODE 310.00 IS CODE = 62  
-----

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>(STREET TABLE SECTION # 1 USED)<<<<<  
-----  
UPSTREAM ELEVATION(FEET) = 767.10 DOWNSTREAM ELEVATION(FEET) = 763.50  
STREET LENGTH(FEET) = 600.00 CURB HEIGHT(INCHES) = 6.0  
STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
Manning's FRICTION FACTOR for Streetflow Section(curb-to-curb) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 12.01  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.47  
HALFSTREET FLOOD WIDTH(FEET) = 15.59  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.29  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 1.08  
STREET FLOW TRAVEL TIME(MIN.) = 4.36 Tc(MIN.) = 19.24  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.711  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 2.62 0.80 0.50 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 2.62 SUBAREA RUNOFF(CFS) = 5.45  
EFFECTIVE AREA(ACRES) = 6.35 AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 6.35 PEAK FLOW RATE(CFS) = 13.22

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.48 HALFSTREET FLOOD WIDTH(FEET) = 16.22  
FLOW VELOCITY(FEET/SEC.) = 2.34 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.13  
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 310.00 = 1430.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 310.00 TO NODE 310.00 IS CODE = 81  
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<  
-----

MAINLINE Tc(MIN) = 19.24  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.711  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 3.75 0.80 0.50 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80

SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 3.75 SUBAREA RUNOFF(CFS) = 7.81  
EFFECTIVE AREA(ACRES) = 10.10 AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 10.10 PEAK FLOW RATE(CFS) = 21.03

\*\*\*\*\*  
FLOW PROCESS FROM NODE 310.00 TO NODE 310.00 IS CODE = 81  
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

-----  
MAINLINE Tc(MIN) = 19.24  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.711  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 0.93 0.80 0.50 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 0.93 SUBAREA RUNOFF(CFS) = 1.94  
EFFECTIVE AREA(ACRES) = 11.03 AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 11.03 PEAK FLOW RATE(CFS) = 22.96

\*\*\*\*\*  
FLOW PROCESS FROM NODE 310.00 TO NODE 313.00 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

-----  
ELEVATION DATA: UPSTREAM(FEET) = 756.50 DOWNSTREAM(FEET) = 755.20  
FLOW LENGTH(FEET) = 330.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 30.0 INCH PIPE IS 22.6 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.80  
ESTIMATED PIPE DIAMETER(INCH) = 30.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 22.96  
PIPE TRAVEL TIME(MIN.) = 0.95 Tc(MIN.) = 20.18  
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 313.00 = 1760.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 313.00 TO NODE 313.00 IS CODE = 81  
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

-----  
MAINLINE Tc(MIN) = 20.18  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.634  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
RESIDENTIAL  
"5-7 DWELLINGS/ACRE" A 3.87 0.80 0.50 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
SUBAREA AREA(ACRES) = 3.87 SUBAREA RUNOFF(CFS) = 7.79  
EFFECTIVE AREA(ACRES) = 14.90 AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.50  
TOTAL AREA(ACRES) = 14.90 PEAK FLOW RATE(CFS) = 29.98

\*\*\*\*\*  
FLOW PROCESS FROM NODE 313.00 TO NODE 317.00 IS CODE = 31  
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<

-----  
ELEVATION DATA: UPSTREAM(FEET) = 755.20 DOWNSTREAM(FEET) = 754.40  
FLOW LENGTH(FEET) = 250.00 MANNING'S N = 0.013  
DEPTH OF FLOW IN 36.0 INCH PIPE IS 24.7 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 5.80  
ESTIMATED PIPE DIAMETER(INCH) = 36.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 29.98  
PIPE TRAVEL TIME(MIN.) = 0.72 Tc(MIN.) = 20.90  
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 317.00 = 2010.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 317.00 TO NODE 317.00 IS CODE = 1  
-----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<

-----  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 20.90  
RAINFALL INTENSITY(INCH/HR) = 2.58  
AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 14.90  
TOTAL STREAM AREA(ACRES) = 14.90  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 29.98

\*\*\*\*\*  
FLOW PROCESS FROM NODE 315.00 TO NODE 316.00 IS CODE = 21  
-----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

-----  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 665.00  
ELEVATION DATA: UPSTREAM(FEET) = 774.10 DOWNSTREAM(FEET) = 767.70

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 13.256  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.390  
SUBAREA Tc AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
 LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
 RESIDENTIAL  
 "5-7 DWELLINGS/ACRE" A 2.32 0.80 0.50 52 13.26  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA RUNOFF(CFS) = 6.25  
 TOTAL AREA(ACRES) = 2.32 PEAK FLOW RATE(CFS) = 6.25

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 316.00 TO NODE 317.00 IS CODE = 62  
 -----

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>(STREET TABLE SECTION # 1 USED)<<<<<  
 =====  
 UPSTREAM ELEVATION(FEET) = 767.70 DOWNSTREAM ELEVATION(FEET) = 763.70  
 STREET LENGTH(FEET) = 550.00 CURB HEIGHT(INCHES) = 6.0  
 STREET HALFWIDTH(FEET) = 18.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 13.00  
 INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
 OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
 Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curb) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 11.80  
 STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
 STREET FLOW DEPTH(FEET) = 0.46  
 HALFSTREET FLOOD WIDTH(FEET) = 14.91  
 AVERAGE FLOW VELOCITY(FEET/SEC.) = 2.45  
 PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 1.12  
 STREET FLOW TRAVEL TIME(MIN.) = 3.75 Tc(MIN.) = 17.00  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.920  
 SUBAREA LOSS RATE DATA(AMC III):  
 DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
 LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
 RESIDENTIAL  
 "5-7 DWELLINGS/ACRE" A 4.88 0.80 0.50 52  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA AREA(ACRES) = 4.88 SUBAREA RUNOFF(CFS) = 11.07  
 EFFECTIVE AREA(ACRES) = 7.20 AREA-AVERAGED Fm(INCH/HR) = 0.40  
 AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 7.20 PEAK FLOW RATE(CFS) = 16.34

END OF SUBAREA STREET FLOW HYDRAULICS:  
 DEPTH(FEET) = 0.50 HALFSTREET FLOOD WIDTH(FEET) = 17.03  
 FLOW VELOCITY(FEET/SEC.) = 2.64 DEPTH\*VELOCITY(FT\*FT/SEC.) = 1.32  
 LONGEST FLOWPATH FROM NODE 315.00 TO NODE 317.00 = 1215.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 317.00 TO NODE 317.00 IS CODE = 1  
 -----

>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
 >>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<  
 =====

TOTAL NUMBER OF STREAMS = 2  
 CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 17.00  
 RAINFALL INTENSITY(INCH/HR) = 2.92  
 AREA-AVERAGED Fm(INCH/HR) = 0.40  
 AREA-AVERAGED Fp(INCH/HR) = 0.80  
 AREA-AVERAGED Ap = 0.50  
 EFFECTIVE STREAM AREA(ACRES) = 7.20  
 TOTAL STREAM AREA(ACRES) = 7.20  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 16.34

\*\* CONFLUENCE DATA \*\*  

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	29.98	20.90	2.579	0.80( 0.40)	0.50	14.9	308.00
2	16.34	17.00	2.920	0.80( 0.40)	0.50	7.2	315.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*  

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	44.53	17.00	2.920	0.80( 0.40)	0.50	19.3	315.00
2	44.12	20.90	2.579	0.80( 0.40)	0.50	22.1	308.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
 PEAK FLOW RATE(CFS) = 44.53 Tc(MIN.) = 17.00  
 EFFECTIVE AREA(ACRES) = 19.32 AREA-AVERAGED Fm(INCH/HR) = 0.40  
 AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.50  
 TOTAL AREA(ACRES) = 22.10  
 LONGEST FLOWPATH FROM NODE 308.00 TO NODE 317.00 = 2010.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 317.00 TO NODE 325.00 IS CODE = 31  
 -----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<  
 =====

ELEVATION DATA: UPSTREAM(FEET) = 763.70 DOWNSTREAM(FEET) = 752.60  
 FLOW LENGTH(FEET) = 445.00 MANNING'S N = 0.013  
 DEPTH OF FLOW IN 27.0 INCH PIPE IS 20.7 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 13.62  
 ESTIMATED PIPE DIAMETER(INCH) = 27.00 NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 44.53  
 PIPE TRAVEL TIME(MIN.) = 0.54 Tc(MIN.) = 17.55

LONGEST FLOWPATH FROM NODE 308.00 TO NODE 325.00 = 2455.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 325.00 TO NODE 325.00 IS CODE = 1  
-----  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<  
-----  
TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:  
TIME OF CONCENTRATION(MIN.) = 17.55  
RAINFALL INTENSITY(INCH/HR) = 2.86  
AREA-AVERAGED Fm(INCH/HR) = 0.40  
AREA-AVERAGED Fp(INCH/HR) = 0.80  
AREA-AVERAGED Ap = 0.50  
EFFECTIVE STREAM AREA(ACRES) = 19.32  
TOTAL STREAM AREA(ACRES) = 22.10  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 44.53

\*\*\*\*\*  
FLOW PROCESS FROM NODE 320.00 TO NODE 321.00 IS CODE = 21  
-----  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
-----  
INITIAL SUBAREA FLOW-LENGTH(FEET) = 650.00  
ELEVATION DATA: UPSTREAM(FEET) = 783.80 DOWNSTREAM(FEET) = 778.90  
  
Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 10.779  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.838  
SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
COMMERCIAL A 1.14 0.80 0.10 52 10.78  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA RUNOFF(CFS) = 3.86  
TOTAL AREA(ACRES) = 1.14 PEAK FLOW RATE(CFS) = 3.86

\*\*\*\*\*  
FLOW PROCESS FROM NODE 321.00 TO NODE 323.00 IS CODE = 62  
-----  
>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<  
>>>>(STREET TABLE SECTION # 2 USED)<<<<  
-----  
UPSTREAM ELEVATION(FEET) = 778.90 DOWNSTREAM ELEVATION(FEET) = 778.70  
STREET LENGTH(FEET) = 395.00 CURB HEIGHT(INCHES) = 8.0  
STREET HALFWIDTH(FEET) = 32.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 27.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 2  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curb) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 5.36  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.53  
HALFSTREET FLOOD WIDTH(FEET) = 18.55  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 0.74  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.39  
STREET FLOW TRAVEL TIME(MIN.) = 8.92 Tc(MIN.) = 19.70  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.673  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 1.28 0.80 0.10 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA AREA(ACRES) = 1.28 SUBAREA RUNOFF(CFS) = 2.99  
EFFECTIVE AREA(ACRES) = 2.42 AREA-AVERAGED Fm(INCH/HR) = 0.08  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.10  
TOTAL AREA(ACRES) = 2.42 PEAK FLOW RATE(CFS) = 5.65

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.54 HALFSTREET FLOOD WIDTH(FEET) = 18.96  
FLOW VELOCITY(FEET/SEC.) = 0.75 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.40  
LONGEST FLOWPATH FROM NODE 320.00 TO NODE 323.00 = 1045.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 323.00 TO NODE 325.00 IS CODE = 31  
-----  
>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<  
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<  
-----  
ELEVATION DATA: UPSTREAM(FEET) = 766.70 DOWNSTREAM(FEET) = 752.60  
FLOW LENGTH(FEET) = 50.00 MANNING'S N = 0.013  
ESTIMATED PIPE DIAMETER(INCH) INCREASED TO 18.000  
DEPTH OF FLOW IN 18.0 INCH PIPE IS 3.9 INCHES  
PIPE-FLOW VELOCITY(FEET/SEC.) = 19.89  
ESTIMATED PIPE DIAMETER(INCH) = 18.00 NUMBER OF PIPES = 1  
PIPE-FLOW(CFS) = 5.65  
PIPE TRAVEL TIME(MIN.) = 0.04 Tc(MIN.) = 19.74  
LONGEST FLOWPATH FROM NODE 320.00 TO NODE 325.00 = 1095.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 325.00 TO NODE 325.00 IS CODE = 1  
-----  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<  
-----  
TOTAL NUMBER OF STREAMS = 2

CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
 TIME OF CONCENTRATION(MIN.) = 19.74  
 RAINFALL INTENSITY(INCH/HR) = 2.67  
 AREA-AVERAGED Fm(INCH/HR) = 0.08  
 AREA-AVERAGED Fp(INCH/HR) = 0.80  
 AREA-AVERAGED Ap = 0.10  
 EFFECTIVE STREAM AREA(ACRES) = 2.42  
 TOTAL STREAM AREA(ACRES) = 2.42  
 PEAK FLOW RATE(CFS) AT CONFLUENCE = 5.65

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	44.53	17.55	2.865	0.80( 0.40)	0.50	19.3	315.00
1	44.12	21.45	2.540	0.80( 0.40)	0.50	22.1	308.00
2	5.65	19.74	2.669	0.80( 0.08)	0.10	2.4	320.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
 CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	49.93	17.55	2.865	0.80( 0.37)	0.46	21.5	315.00
2	49.95	19.74	2.669	0.80( 0.36)	0.46	23.3	320.00
3	49.48	21.45	2.540	0.80( 0.37)	0.46	24.5	308.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
 PEAK FLOW RATE(CFS) = 49.95 Tc(MIN.) = 19.74  
 EFFECTIVE AREA(ACRES) = 23.30 AREA-AVERAGED Fm(INCH/HR) = 0.36  
 AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.46  
 TOTAL AREA(ACRES) = 24.52  
 LONGEST FLOWPATH FROM NODE 308.00 TO NODE 325.00 = 2455.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 325.00 TO NODE 326.00 IS CODE = 31  
 -----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<<  
 =====  
 ELEVATION DATA: UPSTREAM( FEET) = 752.60 DOWNSTREAM( FEET) = 326.00  
 FLOW LENGTH( FEET) = 640.00 MANNING'S N = 0.013  
 ESTIMATED PIPE DIAMETER( INCH) INCREASED TO 18.00  
 DEPTH OF FLOW IN 18.0 INCH PIPE IS 10.0 INCHES  
 PIPE-FLOW VELOCITY( FEET/SEC.) = 49.39  
 ESTIMATED PIPE DIAMETER( INCH) = 18.00 NUMBER OF PIPES = 1  
 PIPE-FLOW( CFS) = 49.95  
 PIPE TRAVEL TIME( MIN.) = 0.22 Tc( MIN.) = 19.96  
 LONGEST FLOWPATH FROM NODE 308.00 TO NODE 326.00 = 3095.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 326.00 TO NODE 326.00 IS CODE = 81  
 -----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<<  
 =====  
 MAINLINE Tc( MIN) = 19.96  
 \* 100 YEAR RAINFALL INTENSITY( INCH/HR) = 2.652  
 SUBAREA LOSS RATE DATA( AMC III):  
 DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
 LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
 RESIDENTIAL  
 "5-7 DWELLINGS/ACRE" A 13.00 0.80 0.50 52  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp( INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA AREA( ACRES) = 13.00 SUBAREA RUNOFF( CFS) = 26.37  
 EFFECTIVE AREA( ACRES) = 36.30 AREA-AVERAGED Fm( INCH/HR) = 0.38  
 AREA-AVERAGED Fp( INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.47  
 TOTAL AREA( ACRES) = 37.52 PEAK FLOW RATE( CFS) = 74.34

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	Tc (MIN.)	Intensity (INCH/HR)	Fp(Fm) (INCH/HR)	Ap	Ae (ACRES)	HEADWATER NODE
1	76.50	17.76	2.844	0.80( 0.38)	0.48	34.5	315.00
2	74.34	19.96	2.652	0.80( 0.38)	0.47	36.3	320.00
3	72.50	21.66	2.524	0.80( 0.38)	0.47	37.5	308.00

NEW PEAK FLOW DATA ARE:  
 PEAK FLOW RATE( CFS) = 76.50 Tc( MIN.) = 17.76  
 AREA-AVERAGED Fm( INCH/HR) = 0.38 AREA-AVERAGED Fp( INCH/HR) = 0.80  
 AREA-AVERAGED Ap = 0.48 EFFECTIVE AREA( ACRES) = 34.47

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 326.00 TO NODE 326.00 IS CODE = 81  
 -----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<<  
 =====  
 MAINLINE Tc( MIN) = 17.76  
 \* 100 YEAR RAINFALL INTENSITY( INCH/HR) = 2.844  
 SUBAREA LOSS RATE DATA( AMC III):  
 DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
 LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
 COMMERCIAL  
 "A" A 2.00 0.80 0.10 52  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp( INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
 SUBAREA AREA( ACRES) = 2.00 SUBAREA RUNOFF( CFS) = 4.98  
 EFFECTIVE AREA( ACRES) = 36.47 AREA-AVERAGED Fm( INCH/HR) = 0.36  
 AREA-AVERAGED Fp( INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.45  
 TOTAL AREA( ACRES) = 39.52 PEAK FLOW RATE( CFS) = 81.47

\*\*\*\*\*  
 FLOW PROCESS FROM NODE 326.00 TO NODE 327.00 IS CODE = 31  
 -----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<<

=====
ELEVATION DATA: UPSTREAM(FEET) = 750.00 DOWNSTREAM(FEET) = 749.90
FLOW LENGTH(FEET) = 50.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 54.0 INCH PIPE IS 42.0 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.13
ESTIMATED PIPE DIAMETER(INCH) = 54.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 81.47
PIPE TRAVEL TIME(MIN.) = 0.14 Tc(MIN.) = 17.90
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 327.00 = 3145.00 FEET.

\*\*\*\*\*
FLOW PROCESS FROM NODE 327.00 TO NODE 327.00 IS CODE = 81
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
MAINLINE Tc(MIN) = 17.90
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.831
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN
COMMERCIAL A 1.00 0.80 0.10 52
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10
SUBAREA AREA(ACRES) = 1.00 SUBAREA RUNOFF(CFS) = 2.48
EFFECTIVE AREA(ACRES) = 37.47 AREA-AVERAGED Fm(INCH/HR) = 0.35
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.45
TOTAL AREA(ACRES) = 40.52 PEAK FLOW RATE(CFS) = 83.52

\*\*\*\*\*
FLOW PROCESS FROM NODE 327.00 TO NODE 328.00 IS CODE = 31
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
=====
ELEVATION DATA: UPSTREAM(FEET) = 749.90 DOWNSTREAM(FEET) = 746.40
FLOW LENGTH(FEET) = 860.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 48.0 INCH PIPE IS 36.8 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 8.08
ESTIMATED PIPE DIAMETER(INCH) = 48.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 83.52
PIPE TRAVEL TIME(MIN.) = 1.77 Tc(MIN.) = 19.67
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 328.00 = 4005.00 FEET.

\*\*\*\*\*
FLOW PROCESS FROM NODE 328.00 TO NODE 328.00 IS CODE = 81
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
MAINLINE Tc(MIN) = 19.67
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.675
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN
SCHOOL A 9.70 0.80 0.60 52
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.60
SUBAREA AREA(ACRES) = 9.70 SUBAREA RUNOFF(CFS) = 19.18
EFFECTIVE AREA(ACRES) = 47.17 AREA-AVERAGED Fm(INCH/HR) = 0.38
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.48
TOTAL AREA(ACRES) = 50.22 PEAK FLOW RATE(CFS) = 97.44

\*\*\*\*\*
FLOW PROCESS FROM NODE 328.00 TO NODE 328.00 IS CODE = 81
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
MAINLINE Tc(MIN) = 19.67
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.675
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN
COMMERCIAL A 2.60 0.80 0.10 52
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10
SUBAREA AREA(ACRES) = 2.60 SUBAREA RUNOFF(CFS) = 6.07
EFFECTIVE AREA(ACRES) = 49.77 AREA-AVERAGED Fm(INCH/HR) = 0.36
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.46
TOTAL AREA(ACRES) = 52.82 PEAK FLOW RATE(CFS) = 103.51

\*\*\*\*\*
FLOW PROCESS FROM NODE 328.00 TO NODE 329.00 IS CODE = 31
-----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<
>>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<
=====
ELEVATION DATA: UPSTREAM(FEET) = 746.40 DOWNSTREAM(FEET) = 746.30
FLOW LENGTH(FEET) = 50.00 MANNING'S N = 0.013
DEPTH OF FLOW IN 60.0 INCH PIPE IS 45.0 INCHES
PIPE-FLOW VELOCITY(FEET/SEC.) = 6.55
ESTIMATED PIPE DIAMETER(INCH) = 60.00 NUMBER OF PIPES = 1
PIPE-FLOW(CFS) = 103.51
PIPE TRAVEL TIME(MIN.) = 0.13 Tc(MIN.) = 19.80
LONGEST FLOWPATH FROM NODE 308.00 TO NODE 329.00 = 4055.00 FEET.

\*\*\*\*\*
FLOW PROCESS FROM NODE 329.00 TO NODE 329.00 IS CODE = 81
-----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
=====
MAINLINE Tc(MIN) = 19.80
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.665
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS



LAND USE                    GROUP    (ACRES)    (INCH/HR)    (DECIMAL)    CN  
 COMMERCIAL                    A            0.95        0.80        0.10        52  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
 SUBAREA AREA(ACRES) = 0.95            SUBAREA RUNOFF(CFS) = 2.21  
 EFFECTIVE AREA(ACRES) = 50.72        AREA-AVERAGED Fm(INCH/HR) = 0.36  
 AREA-AVERAGED Fp(INCH/HR) = 0.80        AREA-AVERAGED Ap = 0.45  
 TOTAL AREA(ACRES) = 53.77            PEAK FLOW RATE(CFS) = 105.26

\*\*\*\*\*  
 FLOW PROCESS FROM NODE    329.00 TO NODE    330.00 IS CODE = 31  
 -----

>>>>COMPUTE PIPE-FLOW TRAVEL TIME THRU SUBAREA<<<<<<  
 >>>>USING COMPUTER-ESTIMATED PIPESIZE (NON-PRESSURE FLOW)<<<<<<  
 =====  
 ELEVATION DATA: UPSTREAM(FEET) = 746.30    DOWNSTREAM(FEET) = 744.00  
 FLOW LENGTH(FEET) = 500.00    MANNING'S N = 0.013  
 DEPTH OF FLOW IN 51.0 INCH PIPE IS 39.4 INCHES  
 PIPE-FLOW VELOCITY(FEET/SEC.) = 8.95  
 ESTIMATED PIPE DIAMETER(INCH) = 51.00    NUMBER OF PIPES = 1  
 PIPE-FLOW(CFS) = 105.26  
 PIPE TRAVEL TIME(MIN.) = 0.93    Tc(MIN.) = 20.73  
 LONGEST FLOWPATH FROM NODE    308.00 TO NODE    330.00 = 4555.00 FEET.

\*\*\*\*\*  
 FLOW PROCESS FROM NODE    330.00 TO NODE    330.00 IS CODE = 81  
 -----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<<  
 =====  
 MAINLINE Tc(MIN) = 20.73  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.592  
 SUBAREA LOSS RATE DATA(AMC III):  
 DEVELOPMENT TYPE/            SCS SOIL    AREA        Fp            Ap        SCS  
 LAND USE                    GROUP    (ACRES)    (INCH/HR)    (DECIMAL)    CN  
 COMMERCIAL                    A            1.65        0.80        0.10        52  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
 SUBAREA AREA(ACRES) = 1.65            SUBAREA RUNOFF(CFS) = 3.73  
 EFFECTIVE AREA(ACRES) = 52.37        AREA-AVERAGED Fm(INCH/HR) = 0.35  
 AREA-AVERAGED Fp(INCH/HR) = 0.80        AREA-AVERAGED Ap = 0.44  
 TOTAL AREA(ACRES) = 55.42            PEAK FLOW RATE(CFS) = 105.68

\*\*\*\*\*  
 FLOW PROCESS FROM NODE    330.00 TO NODE    330.00 IS CODE = 81  
 -----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<<  
 =====  
 MAINLINE Tc(MIN) = 20.73  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.592  
 SUBAREA LOSS RATE DATA(AMC III):  
 DEVELOPMENT TYPE/            SCS SOIL    AREA        Fp            Ap        SCS  
 LAND USE                    GROUP    (ACRES)    (INCH/HR)    (DECIMAL)    CN  
 RESIDENTIAL  
 "5-7 DWELLINGS/ACRE"        A            5.54        0.80        0.50        52  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.50  
 SUBAREA AREA(ACRES) = 5.54            SUBAREA RUNOFF(CFS) = 10.94  
 EFFECTIVE AREA(ACRES) = 57.91        AREA-AVERAGED Fm(INCH/HR) = 0.35  
 AREA-AVERAGED Fp(INCH/HR) = 0.80        AREA-AVERAGED Ap = 0.45  
 TOTAL AREA(ACRES) = 60.96            PEAK FLOW RATE(CFS) = 116.62

-----  
 Chino Avenue  
 -----

\*\*\*\*\*  
 FLOW PROCESS FROM NODE    524.00 TO NODE    522.00 IS CODE = 21  
 -----

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<<  
 >>>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
 =====  
 INITIAL SUBAREA FLOW-LENGTH(FEET) = 700.00  
 ELEVATION DATA: UPSTREAM(FEET) = 754.20    DOWNSTREAM(FEET) = 751.40  
  
 $Tc = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] * 0.20$   
 SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 12.604  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.494  
 SUBAREA Tc AND LOSS RATE DATA(AMC III):  
 DEVELOPMENT TYPE/            SCS SOIL    AREA        Fp            Ap        SCS    Tc  
 LAND USE                    GROUP    (ACRES)    (INCH/HR)    (DECIMAL)    CN    (MIN.)  
 COMMERCIAL                    A            0.92        0.80        0.10        52    12.60  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
 SUBAREA RUNOFF(CFS) = 2.83  
 TOTAL AREA(ACRES) = 0.92    PEAK FLOW RATE(CFS) = 2.83

\*\*\*\*\*  
 FLOW PROCESS FROM NODE    522.00 TO NODE    522.00 IS CODE = 81  
 -----

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<<  
 =====  
 MAINLINE Tc(MIN) = 12.60  
 \* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.494  
 SUBAREA LOSS RATE DATA(AMC III):  
 DEVELOPMENT TYPE/            SCS SOIL    AREA        Fp            Ap        SCS  
 LAND USE                    GROUP    (ACRES)    (INCH/HR)    (DECIMAL)    CN  
 PUBLIC PARK                    A            0.78        0.80        0.85        52  
 SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
 SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.85  
 SUBAREA AREA(ACRES) = 0.78            SUBAREA RUNOFF(CFS) = 1.98  
 EFFECTIVE AREA(ACRES) = 1.70        AREA-AVERAGED Fm(INCH/HR) = 0.35

AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.44  
TOTAL AREA(ACRES) = 1.70 PEAK FLOW RATE(CFS) = 4.80

\*\*\*\*\*  
FLOW PROCESS FROM NODE 522.00 TO NODE 523.00 IS CODE = 21

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

INITIAL SUBAREA FLOW-LENGTH(FEET) = 820.00  
ELEVATION DATA: UPSTREAM(FEET) = 755.00 DOWNSTREAM(FEET) = 748.20

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 11.605  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.671  
SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
COMMERCIAL A 0.80 0.80 0.10 52 11.61  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA RUNOFF(CFS) = 2.59  
TOTAL AREA(ACRES) = 0.80 PEAK FLOW RATE(CFS) = 2.59

\*\*\*\*\*  
FLOW PROCESS FROM NODE 523.00 TO NODE 524.00 IS CODE = 62

>>>>COMPUTE STREET FLOW TRAVEL TIME THRU SUBAREA<<<<<  
>>>>(STREET TABLE SECTION # 2 USED)<<<<<

=====

UPSTREAM ELEVATION(FEET) = 748.20 DOWNSTREAM ELEVATION(FEET) = 747.70  
STREET LENGTH(FEET) = 565.00 CURB HEIGHT(INCHES) = 8.0  
STREET HALFWIDTH(FEET) = 32.00

DISTANCE FROM CROWN TO CROSSFALL GRADEBREAK(FEET) = 27.00  
INSIDE STREET CROSSFALL(DECIMAL) = 0.020  
OUTSIDE STREET CROSSFALL(DECIMAL) = 0.020

SPECIFIED NUMBER OF HALFSTREETS CARRYING RUNOFF = 1  
Manning's FRICTION FACTOR for Streetflow Section(curbs-to-curb) = 0.0150

\*\*TRAVEL TIME COMPUTED USING ESTIMATED FLOW(CFS) = 3.46  
STREETFLOW MODEL RESULTS USING ESTIMATED FLOW:  
STREET FLOW DEPTH(FEET) = 0.53  
HALFSTREET FLOOD WIDTH(FEET) = 18.38  
AVERAGE FLOW VELOCITY(FEET/SEC.) = 0.97  
PRODUCT OF DEPTH&VELOCITY(FT\*FT/SEC.) = 0.51  
STREET FLOW TRAVEL TIME(MIN.) = 9.71 Tc(MIN.) = 21.32  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.549  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
COMMERCIAL A 0.78 0.80 0.10 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA AREA(ACRES) = 0.78 SUBAREA RUNOFF(CFS) = 1.73  
EFFECTIVE AREA(ACRES) = 1.58 AREA-AVERAGED Fm(INCH/HR) = 0.08  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.10  
TOTAL AREA(ACRES) = 1.58 PEAK FLOW RATE(CFS) = 3.51

END OF SUBAREA STREET FLOW HYDRAULICS:  
DEPTH(FEET) = 0.53 HALFSTREET FLOOD WIDTH(FEET) = 18.49  
FLOW VELOCITY(FEET/SEC.) = 0.97 DEPTH\*VELOCITY(FT\*FT/SEC.) = 0.51  
LONGEST FLOWPATH FROM NODE 522.00 TO NODE 524.00 = 1385.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 524.00 TO NODE 524.00 IS CODE = 81

>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<<

=====

MAINLINE Tc(MIN) = 21.32  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 2.549  
SUBAREA LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN  
PUBLIC PARK A 1.37 0.80 0.85 52  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.85  
SUBAREA AREA(ACRES) = 1.37 SUBAREA RUNOFF(CFS) = 2.31  
EFFECTIVE AREA(ACRES) = 2.95 AREA-AVERAGED Fm(INCH/HR) = 0.36  
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.45  
TOTAL AREA(ACRES) = 2.95 PEAK FLOW RATE(CFS) = 5.82

\*\*\*\*\*  
FLOW PROCESS FROM NODE 520.00 TO NODE 518.00 IS CODE = 21

>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<

=====

INITIAL SUBAREA FLOW-LENGTH(FEET) = 683.00  
ELEVATION DATA: UPSTREAM(FEET) = 758.20 DOWNSTREAM(FEET) = 745.20

Tc = K\*[(LENGTH\*\* 3.00)/(ELEVATION CHANGE)]\*\*0.20  
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 9.136  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 4.238  
SUBAREA Tc AND LOSS RATE DATA(AMC III):  
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc  
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)  
COMMERCIAL A 0.84 0.80 0.10 52 9.14  
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10  
SUBAREA RUNOFF(CFS) = 3.14  
TOTAL AREA(ACRES) = 0.84 PEAK FLOW RATE(CFS) = 3.14

```

*****
FLOW PROCESS FROM NODE 518.00 TO NODE 518.00 IS CODE = 81
-----
>>>>ADDITION OF SUBAREA TO MAINLINE PEAK FLOW<<<<
-----
MAINLINE Tc(MIN) = 9.14
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 4.238
SUBAREA LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN
PUBLIC PARK A 0.56 0.80 0.85 52
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.85
SUBAREA AREA(ACRES) = 0.56 SUBAREA RUNOFF(CFS) = 1.79
EFFECTIVE AREA(ACRES) = 1.40 AREA-AVERAGED Fm(INCH/HR) = 0.32
AREA-AVERAGED Fp(INCH/HR) = 0.80 AREA-AVERAGED Ap = 0.40
TOTAL AREA(ACRES) = 1.40 PEAK FLOW RATE(CFS) = 4.94

```

```

*****
FLOW PROCESS FROM NODE 514.00 TO NODE 516.00 IS CODE = 21
-----
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
-----
INITIAL SUBAREA FLOW-LENGTH(FEET) = 705.00
ELEVATION DATA: UPSTREAM(FEET) = 760.00 DOWNSTREAM(FEET) = 745.80

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 9.148
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 4.235
SUBAREA Tc AND LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)
COMMERCIAL A 1.50 0.80 0.10 52 9.15
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10
SUBAREA RUNOFF(CFS) = 5.61
TOTAL AREA(ACRES) = 1.50 PEAK FLOW RATE(CFS) = 5.61

```

```

*****
FLOW PROCESS FROM NODE 510.00 TO NODE 512.00 IS CODE = 21
-----
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
-----
INITIAL SUBAREA FLOW-LENGTH(FEET) = 600.00
ELEVATION DATA: UPSTREAM(FEET) = 753.00 DOWNSTREAM(FEET) = 752.40

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 15.636
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.070
SUBAREA Tc AND LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)
COMMERCIAL A 1.50 0.80 0.10 52 15.64
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.80
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10
SUBAREA RUNOFF(CFS) = 4.04
TOTAL AREA(ACRES) = 1.50 PEAK FLOW RATE(CFS) = 4.04

```

```

+-----+
| East riverside Drive |
+-----+

```

```

*****
FLOW PROCESS FROM NODE 500.00 TO NODE 502.00 IS CODE = 21
-----
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<
-----
INITIAL SUBAREA FLOW-LENGTH(FEET) = 758.00
ELEVATION DATA: UPSTREAM(FEET) = 774.10 DOWNSTREAM(FEET) = 769.10

Tc = K*[(LENGTH** 3.00)/(ELEVATION CHANGE)]**0.20
SUBAREA ANALYSIS USED MINIMUM Tc(MIN.) = 11.773
* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 3.640
SUBAREA Tc AND LOSS RATE DATA(AMC III):
DEVELOPMENT TYPE/ SCS SOIL AREA Fp Ap SCS Tc
LAND USE GROUP (ACRES) (INCH/HR) (DECIMAL) CN (MIN.)
COMMERCIAL A 0.91 0.80 0.10 52 11.77
COMMERCIAL C 0.39 0.27 0.10 86 11.77
SUBAREA AVERAGE PERVIOUS LOSS RATE, Fp(INCH/HR) = 0.64
SUBAREA AVERAGE PERVIOUS AREA FRACTION, Ap = 0.10
SUBAREA RUNOFF(CFS) = 4.18
TOTAL AREA(ACRES) = 1.30 PEAK FLOW RATE(CFS) = 4.18

```

```

*****
FLOW PROCESS FROM NODE 502.00 TO NODE 502.00 IS CODE = 1
-----
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<
-----
TOTAL NUMBER OF STREAMS = 2
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 1 ARE:
TIME OF CONCENTRATION(MIN.) = 11.77
RAINFALL INTENSITY(INCH/HR) = 3.64
AREA-AVERAGED Fm(INCH/HR) = 0.06
AREA-AVERAGED Fp(INCH/HR) = 0.64
AREA-AVERAGED Ap = 0.10
EFFECTIVE STREAM AREA(ACRES) = 1.30
TOTAL STREAM AREA(ACRES) = 1.30

```

PEAK FLOW RATE(CFS) AT CONFLUENCE = 4.18

\*\*\*\*\*  
FLOW PROCESS FROM NODE 501.00 TO NODE 502.00 IS CODE = 21  
-----  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
=====

INITIAL SUBAREA FLOW-LENGTH(FEET) = 452.00  
ELEVATION DATA: UPSTREAM(FEET) = 773.30 DOWNSTREAM(FEET) = 769.10

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] * 0.20$   
SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 8.939  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 4.294  
SUBAREA  $T_c$  AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
COMMERCIAL	A	0.55	0.80	0.10	52	8.94
COMMERCIAL	C	0.22	0.27	0.10	86	8.94

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.65  
SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.10  
SUBAREA RUNOFF(CFS) = 2.93  
TOTAL AREA(ACRES) = 0.77 PEAK FLOW RATE(CFS) = 2.93

\*\*\*\*\*  
FLOW PROCESS FROM NODE 502.00 TO NODE 502.00 IS CODE = 1  
-----  
>>>>DESIGNATE INDEPENDENT STREAM FOR CONFLUENCE<<<<<  
>>>>AND COMPUTE VARIOUS CONFLUENCED STREAM VALUES<<<<<  
=====

TOTAL NUMBER OF STREAMS = 2  
CONFLUENCE VALUES USED FOR INDEPENDENT STREAM 2 ARE:  
TIME OF CONCENTRATION(MIN.) = 8.94  
RAINFALL INTENSITY(INCH/HR) = 4.29  
AREA-AVERAGED  $F_m$ (INCH/HR) = 0.06  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.65  
AREA-AVERAGED  $A_p$  = 0.10  
EFFECTIVE STREAM AREA(ACRES) = 0.77  
TOTAL STREAM AREA(ACRES) = 0.77  
PEAK FLOW RATE(CFS) AT CONFLUENCE = 2.93

\*\* CONFLUENCE DATA \*\*

STREAM NUMBER	Q (CFS)	$T_c$ (MIN.)	Intensity (INCH/HR)	$F_p(F_m)$ (INCH/HR)	$A_p$ (ACRES)	$A_e$ (ACRES)	HEADWATER NODE
1	4.18	11.77	3.640	0.64( 0.06)	0.10	1.3	500.00
2	2.93	8.94	4.294	0.65( 0.06)	0.10	0.8	501.00

RAINFALL INTENSITY AND TIME OF CONCENTRATION RATIO  
CONFLUENCE FORMULA USED FOR 2 STREAMS.

\*\* PEAK FLOW RATE TABLE \*\*

STREAM NUMBER	Q (CFS)	$T_c$ (MIN.)	Intensity (INCH/HR)	$F_p(F_m)$ (INCH/HR)	$A_p$ (ACRES)	$A_e$ (ACRES)	HEADWATER NODE
1	6.69	8.94	4.294	0.64( 0.06)	0.10	1.8	501.00
2	6.66	11.77	3.640	0.64( 0.06)	0.10	2.1	500.00

COMPUTED CONFLUENCE ESTIMATES ARE AS FOLLOWS:  
PEAK FLOW RATE(CFS) = 6.69  $T_c$ (MIN.) = 8.94  
EFFECTIVE AREA(ACRES) = 1.76 AREA-AVERAGED  $F_m$ (INCH/HR) = 0.06  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.64 AREA-AVERAGED  $A_p$  = 0.10  
TOTAL AREA(ACRES) = 2.07  
LONGEST FLOWPATH FROM NODE 500.00 TO NODE 502.00 = 758.00 FEET.

\*\*\*\*\*  
FLOW PROCESS FROM NODE 505.00 TO NODE 507.00 IS CODE = 21  
-----  
>>>>RATIONAL METHOD INITIAL SUBAREA ANALYSIS<<<<<  
>>USE TIME-OF-CONCENTRATION NOMOGRAPH FOR INITIAL SUBAREA<<  
=====

INITIAL SUBAREA FLOW-LENGTH(FEET) = 572.00  
ELEVATION DATA: UPSTREAM(FEET) = 773.30 DOWNSTREAM(FEET) = 761.90

$T_c = K * [(LENGTH ** 3.00) / (ELEVATION CHANGE)] * 0.20$   
SUBAREA ANALYSIS USED MINIMUM  $T_c$ (MIN.) = 8.432  
\* 100 YEAR RAINFALL INTENSITY(INCH/HR) = 4.447  
SUBAREA  $T_c$  AND LOSS RATE DATA(AMC III):

DEVELOPMENT TYPE/ LAND USE	SCS SOIL GROUP	AREA (ACRES)	$F_p$ (INCH/HR)	$A_p$ (DECIMAL)	SCS CN	$T_c$ (MIN.)
COMMERCIAL	A	1.11	0.80	0.10	52	8.43
PUBLIC PARK	A	0.34	0.80	0.85	52	13.40

SUBAREA AVERAGE PERVIOUS LOSS RATE,  $F_p$ (INCH/HR) = 0.80  
SUBAREA AVERAGE PERVIOUS AREA FRACTION,  $A_p$  = 0.28  
SUBAREA RUNOFF(CFS) = 5.52  
TOTAL AREA(ACRES) = 1.45 PEAK FLOW RATE(CFS) = 5.52

=====

END OF STUDY SUMMARY:  
TOTAL AREA(ACRES) = 1.45  $T_c$ (MIN.) = 8.43  
EFFECTIVE AREA(ACRES) = 1.45 AREA-AVERAGED  $F_m$ (INCH/HR) = 0.22  
AREA-AVERAGED  $F_p$ (INCH/HR) = 0.80 AREA-AVERAGED  $A_p$  = 0.28  
PEAK FLOW RATE(CFS) = 5.52

=====

END OF RATIONAL METHOD ANALYSIS

**D. Hydrologic Soils Group Map  
Point Precipitation Frequency, NOAA Atlas 14, Vol. 6, Ver. 2**

## Hydrologic Soil Group

Hydrologic Soil Group— Summary by Map Unit — San Bernardino County Southwestern Part, California (CA677)				
Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
Db	Delhi fine sand	A	152.1	74.3%
Hr	Hilmar loamy fine sand	C	52.5	25.7%
Totals for Area of Interest			204.7	100.0%

### Description

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.

### Rating Options

*Aggregation Method:* Dominant Condition

*Component Percent Cutoff:* None Specified



NOAA Atlas 14, Volume 6, Version 2  
 Location name: Ontario, California, US\*  
 Latitude: 34.0130°, Longitude: -117.6050°  
 Elevation: 755 ft\*  
 \* source: Google Maps



POINT PRECIPITATION FREQUENCY ESTIMATES

Sanja Perica, Sarah Dietz, Sarah Heim, Lillian Hiner, Kazungu Maitana, Deborah Martin, Sandra Pavlovic, Ishani Roy, Carl Trypaluk, Dale Unruh, Fenglin Yan, Michael Yekta, Tan Zhao, Geoffrey Bonnin, Daniel Brewer, Li-Chuan Chen, Tye Parzybok, John Yarchoan

NOAA, National Weather Service, Silver Spring, Maryland

[PF tabular](#) | [PF graphical](#) | [Maps & aerials](#)

PF tabular

PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches/hour) <sup>1</sup>										
Duration	Average recurrence interval (years)									
	1	2	5	10	25	50	100	200	500	1000
5-min	1.37 (1.14-1.66)	1.81 (1.51-2.20)	2.36 (1.97-2.87)	2.80 (2.30-3.43)	3.37 (2.69-4.28)	3.80 (2.96-4.93)	4.22 (3.22-5.63)	4.66 (3.43-6.38)	5.22 (3.68-7.48)	5.65 (3.85-8.38)
10-min	0.984 (0.822-1.19)	1.30 (1.08-1.57)	1.69 (1.41-2.06)	2.00 (1.66-2.46)	2.42 (1.93-3.07)	2.72 (2.12-3.53)	3.03 (2.30-4.03)	3.34 (2.46-4.57)	3.74 (2.64-5.35)	4.05 (2.75-6.01)
15-min	0.792 (0.660-0.956)	1.04 (0.872-1.26)	1.36 (1.14-1.66)	1.62 (1.33-1.98)	1.95 (1.55-2.48)	2.20 (1.71-2.85)	2.44 (1.86-3.25)	2.69 (1.98-3.69)	3.02 (2.13-4.32)	3.26 (2.22-4.84)
30-min	0.598 (0.500-0.724)	0.790 (0.660-0.958)	1.03 (0.858-1.25)	1.22 (1.01-1.50)	1.48 (1.17-1.87)	1.66 (1.30-2.16)	1.85 (1.40-2.46)	2.04 (1.50-2.79)	2.28 (1.61-3.27)	2.47 (1.68-3.66)
60-min	0.443 (0.370-0.536)	0.585 (0.488-0.709)	0.764 (0.635-0.928)	0.906 (0.746-1.11)	1.09 (0.869-1.39)	1.23 (0.958-1.60)	1.37 (1.04-1.82)	1.51 (1.11-2.06)	1.69 (1.19-2.42)	1.83 (1.24-2.71)
2-hr	0.329 (0.275-0.398)	0.433 (0.361-0.525)	0.563 (0.468-0.684)	0.664 (0.548-0.814)	0.796 (0.634-1.01)	0.892 (0.694-1.16)	0.986 (0.749-1.31)	1.08 (0.796-1.48)	1.20 (0.848-1.72)	1.29 (0.880-1.92)
3-hr	0.274 (0.228-0.331)	0.360 (0.300-0.436)	0.466 (0.388-0.566)	0.549 (0.453-0.673)	0.656 (0.522-0.833)	0.735 (0.572-0.953)	0.811 (0.616-1.08)	0.887 (0.654-1.22)	0.984 (0.695-1.41)	1.06 (0.720-1.57)
6-hr	0.193 (0.161-0.233)	0.253 (0.211-0.306)	0.327 (0.272-0.397)	0.385 (0.317-0.472)	0.459 (0.365-0.583)	0.513 (0.400-0.666)	0.566 (0.430-0.754)	0.618 (0.456-0.847)	0.685 (0.484-0.981)	0.735 (0.500-1.09)
12-hr	0.124 (0.104-0.150)	0.163 (0.136-0.197)	0.211 (0.176-0.257)	0.249 (0.205-0.305)	0.298 (0.237-0.378)	0.334 (0.260-0.433)	0.368 (0.280-0.490)	0.403 (0.297-0.552)	0.447 (0.316-0.640)	0.480 (0.327-0.713)
24-hr	0.082 (0.073-0.095)	0.108 (0.096-0.125)	0.142 (0.125-0.164)	0.168 (0.147-0.196)	0.202 (0.171-0.244)	0.228 (0.189-0.280)	0.252 (0.204-0.318)	0.277 (0.219-0.359)	0.310 (0.234-0.418)	0.334 (0.245-0.466)
2-day	0.049 (0.043-0.056)	0.066 (0.058-0.076)	0.088 (0.077-0.101)	0.105 (0.092-0.123)	0.128 (0.109-0.155)	0.146 (0.121-0.180)	0.164 (0.132-0.206)	0.181 (0.143-0.235)	0.205 (0.155-0.277)	0.224 (0.164-0.312)
3-day	0.035 (0.031-0.040)	0.048 (0.042-0.055)	0.064 (0.057-0.074)	0.078 (0.068-0.090)	0.096 (0.081-0.115)	0.110 (0.091-0.135)	0.124 (0.100-0.156)	0.138 (0.109-0.179)	0.157 (0.119-0.212)	0.172 (0.126-0.241)
4-day	0.028 (0.025-0.032)	0.039 (0.034-0.045)	0.053 (0.046-0.061)	0.064 (0.056-0.074)	0.079 (0.067-0.095)	0.091 (0.075-0.112)	0.103 (0.083-0.130)	0.115 (0.091-0.149)	0.132 (0.100-0.178)	0.145 (0.106-0.202)
7-day	0.019 (0.017-0.022)	0.026 (0.023-0.030)	0.036 (0.031-0.041)	0.043 (0.038-0.051)	0.054 (0.046-0.065)	0.062 (0.052-0.077)	0.071 (0.057-0.089)	0.079 (0.063-0.103)	0.091 (0.069-0.123)	0.100 (0.074-0.140)
10-day	0.014 (0.013-0.016)	0.020 (0.018-0.023)	0.027 (0.024-0.032)	0.033 (0.029-0.039)	0.042 (0.035-0.050)	0.048 (0.040-0.059)	0.055 (0.044-0.069)	0.062 (0.049-0.080)	0.071 (0.054-0.096)	0.078 (0.057-0.109)
20-day	0.009 (0.008-0.010)	0.012 (0.011-0.014)	0.017 (0.015-0.019)	0.021 (0.018-0.024)	0.026 (0.022-0.031)	0.030 (0.025-0.037)	0.035 (0.028-0.044)	0.039 (0.031-0.051)	0.046 (0.035-0.062)	0.051 (0.037-0.071)
30-day	0.007 (0.006-0.008)	0.009 (0.008-0.011)	0.013 (0.012-0.015)	0.016 (0.014-0.019)	0.021 (0.018-0.025)	0.024 (0.020-0.030)	0.028 (0.023-0.035)	0.032 (0.025-0.041)	0.037 (0.028-0.050)	0.042 (0.030-0.058)
45-day	0.005 (0.005-0.006)	0.008 (0.007-0.009)	0.010 (0.009-0.012)	0.013 (0.011-0.015)	0.017 (0.014-0.020)	0.020 (0.016-0.024)	0.023 (0.018-0.028)	0.026 (0.020-0.034)	0.031 (0.023-0.041)	0.034 (0.025-0.048)
60-day	0.005 (0.004-0.005)	0.007 (0.006-0.008)	0.009 (0.008-0.011)	0.011 (0.010-0.013)	0.014 (0.012-0.017)	0.017 (0.014-0.021)	0.020 (0.016-0.025)	0.023 (0.018-0.029)	0.027 (0.020-0.036)	0.030 (0.022-0.042)

<sup>1</sup> Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS). Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.

[Back to Top](#)

PF graphical



NOAA Atlas 14, Volume 6, Version 2  
 Location name: Ontario, California, US\*  
 Latitude: 34.0130°, Longitude: -117.6050°  
 Elevation: 755 ft\*  
 \* source: Google Maps



POINT PRECIPITATION FREQUENCY ESTIMATES

Sanja Perica, Sarah Dietz, Sarah Heim, Lillian Hiner, Kazungu Maitaria, Deborah Martin, Sandra Pavlovic, Ishani Roy, Carl Trypaluk, Dale Unruh, Fenglin Yan, Michael Yekta, Tan Zhao, Geoffrey Bonnin, Daniel Brewer, Li-Chuan Chen, Tye Parzybok, John Yarchon

NOAA, National Weather Service, Silver Spring, Maryland

[PF tabular](#) | [PF graphical](#) | [Maps & aeriels](#)

PF tabular

PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches) <sup>1</sup>										
Duration	Average recurrence interval (years)									
	1	2	5	10	25	50	100	200	500	1000
5-min	0.114 (0.095-0.138)	0.151 (0.126-0.183)	0.197 (0.164-0.239)	0.233 (0.192-0.286)	0.281 (0.224-0.357)	0.317 (0.247-0.411)	0.352 (0.268-0.469)	0.388 (0.286-0.532)	0.435 (0.307-0.623)	0.471 (0.321-0.698)
10-min	0.164 (0.137-0.198)	0.216 (0.180-0.262)	0.282 (0.235-0.343)	0.334 (0.276-0.410)	0.403 (0.321-0.512)	0.454 (0.354-0.589)	0.505 (0.383-0.672)	0.556 (0.410-0.762)	0.624 (0.440-0.892)	0.675 (0.459-1.00)
15-min	0.198 (0.165-0.239)	0.261 (0.218-0.316)	0.341 (0.284-0.415)	0.404 (0.333-0.496)	0.488 (0.388-0.619)	0.550 (0.428-0.713)	0.611 (0.464-0.813)	0.673 (0.496-0.922)	0.754 (0.532-1.08)	0.816 (0.556-1.21)
30-min	0.299 (0.250-0.362)	0.395 (0.330-0.479)	0.516 (0.429-0.627)	0.612 (0.504-0.750)	0.738 (0.587-0.936)	0.832 (0.648-1.08)	0.925 (0.702-1.23)	1.02 (0.750-1.40)	1.14 (0.806-1.63)	1.24 (0.841-1.83)
60-min	0.443 (0.370-0.536)	0.585 (0.488-0.709)	0.764 (0.635-0.928)	0.906 (0.746-1.11)	1.09 (0.869-1.39)	1.23 (0.958-1.60)	1.37 (1.04-1.82)	1.51 (1.11-2.06)	1.69 (1.19-2.42)	1.83 (1.24-2.71)
2-hr	0.658 (0.550-0.797)	0.866 (0.722-1.05)	1.13 (0.936-1.37)	1.33 (1.10-1.63)	1.59 (1.27-2.02)	1.78 (1.39-2.32)	1.97 (1.50-2.63)	2.16 (1.59-2.96)	2.40 (1.70-3.44)	2.59 (1.76-3.84)
3-hr	0.822 (0.686-0.995)	1.08 (0.900-1.31)	1.40 (1.16-1.70)	1.65 (1.36-2.02)	1.97 (1.57-2.50)	2.21 (1.72-2.86)	2.44 (1.85-3.24)	2.66 (1.96-3.65)	2.96 (2.09-4.23)	3.17 (2.16-4.71)
6-hr	1.15 (0.963-1.40)	1.51 (1.26-1.83)	1.96 (1.63-2.38)	2.30 (1.90-2.82)	2.75 (2.19-3.49)	3.07 (2.39-3.99)	3.39 (2.57-4.51)	3.70 (2.73-5.07)	4.10 (2.90-5.87)	4.40 (3.00-6.53)
12-hr	1.50 (1.25-1.81)	1.96 (1.64-2.38)	2.55 (2.12-3.10)	3.00 (2.47-3.68)	3.59 (2.86-4.56)	4.02 (3.13-5.21)	4.44 (3.37-5.91)	4.85 (3.58-6.65)	5.39 (3.81-7.71)	5.79 (3.94-8.59)
24-hr	1.97 (1.74-2.27)	2.60 (2.30-3.00)	3.40 (3.00-3.94)	4.03 (3.53-4.70)	4.85 (4.11-5.85)	5.46 (4.53-6.72)	6.06 (4.91-7.63)	6.66 (5.25-8.62)	7.44 (5.63-10.0)	8.02 (5.87-11.2)
2-day	2.35 (2.22-2.89)	3.16 (2.80-3.65)	4.21 (3.71-4.87)	5.05 (4.41-5.89)	6.16 (5.22-7.43)	7.01 (5.81-8.62)	7.85 (6.36-9.90)	8.71 (6.87-11.3)	9.86 (7.46-13.3)	10.7 (7.85-15.0)
3-day	2.51 (2.22-2.89)	3.43 (3.03-3.95)	4.62 (4.07-5.35)	5.58 (4.88-6.52)	6.89 (5.83-8.30)	7.89 (6.54-9.70)	8.90 (7.21-11.2)	9.93 (7.83-12.9)	11.3 (8.58-15.3)	12.4 (9.08-17.3)
4-day	2.70 (2.39-3.11)	3.71 (3.28-4.29)	5.04 (4.44-5.84)	6.12 (5.36-7.14)	7.59 (6.43-9.15)	8.72 (7.24-10.7)	9.87 (8.00-12.4)	11.1 (8.71-14.3)	12.7 (9.58-17.1)	13.9 (10.2-19.4)
7-day	3.15 (2.79-3.64)	4.37 (3.86-5.04)	5.97 (5.26-6.91)	7.28 (6.37-8.50)	9.07 (7.68-10.9)	10.5 (8.68-12.9)	11.9 (9.61-15.0)	13.3 (10.5-17.3)	15.3 (11.6-20.7)	16.9 (12.4-23.6)
10-day	3.43 (3.03-3.95)	4.77 (4.21-5.50)	6.54 (5.77-7.57)	8.00 (6.99-9.33)	10.0 (8.46-12.0)	11.5 (9.58-14.2)	13.1 (10.6-16.6)	14.8 (11.7-19.2)	17.0 (12.9-23.0)	18.8 (13.8-26.3)
20-day	4.12 (3.65-4.75)	5.80 (5.13-6.70)	8.05 (7.10-9.32)	9.93 (8.68-11.6)	12.5 (10.6-15.1)	14.6 (12.1-17.9)	16.7 (13.5-21.1)	18.9 (14.9-24.5)	22.0 (16.7-29.7)	24.5 (17.9-34.2)
30-day	4.81 (4.25-5.54)	6.79 (6.00-7.84)	9.48 (8.36-11.0)	11.7 (10.3-13.7)	14.9 (12.6-18.0)	17.4 (14.5-21.5)	20.1 (16.3-25.3)	22.9 (18.0-29.6)	26.8 (20.3-36.1)	29.9 (21.9-41.7)
45-day	5.76 (5.09-6.64)	8.11 (7.17-9.36)	11.3 (9.99-13.1)	14.1 (12.3-16.4)	18.0 (15.2-21.7)	21.1 (17.5-26.0)	24.4 (19.8-30.8)	28.0 (22.0-36.2)	33.0 (24.9-44.5)	37.0 (27.1-51.7)
60-day	6.71 (5.94-7.74)	9.37 (8.29-10.8)	13.1 (11.5-15.1)	16.2 (14.2-18.9)	20.8 (17.6-25.0)	24.5 (20.3-30.1)	28.4 (23.0-35.8)	32.6 (25.7-42.2)	38.7 (29.2-52.1)	43.6 (31.9-60.8)


<sup>1</sup> Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS). Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.

[Back to Top](#)

PF graphical



Hydrologic Soil Group—San Bernardino County Southwestern Part, California

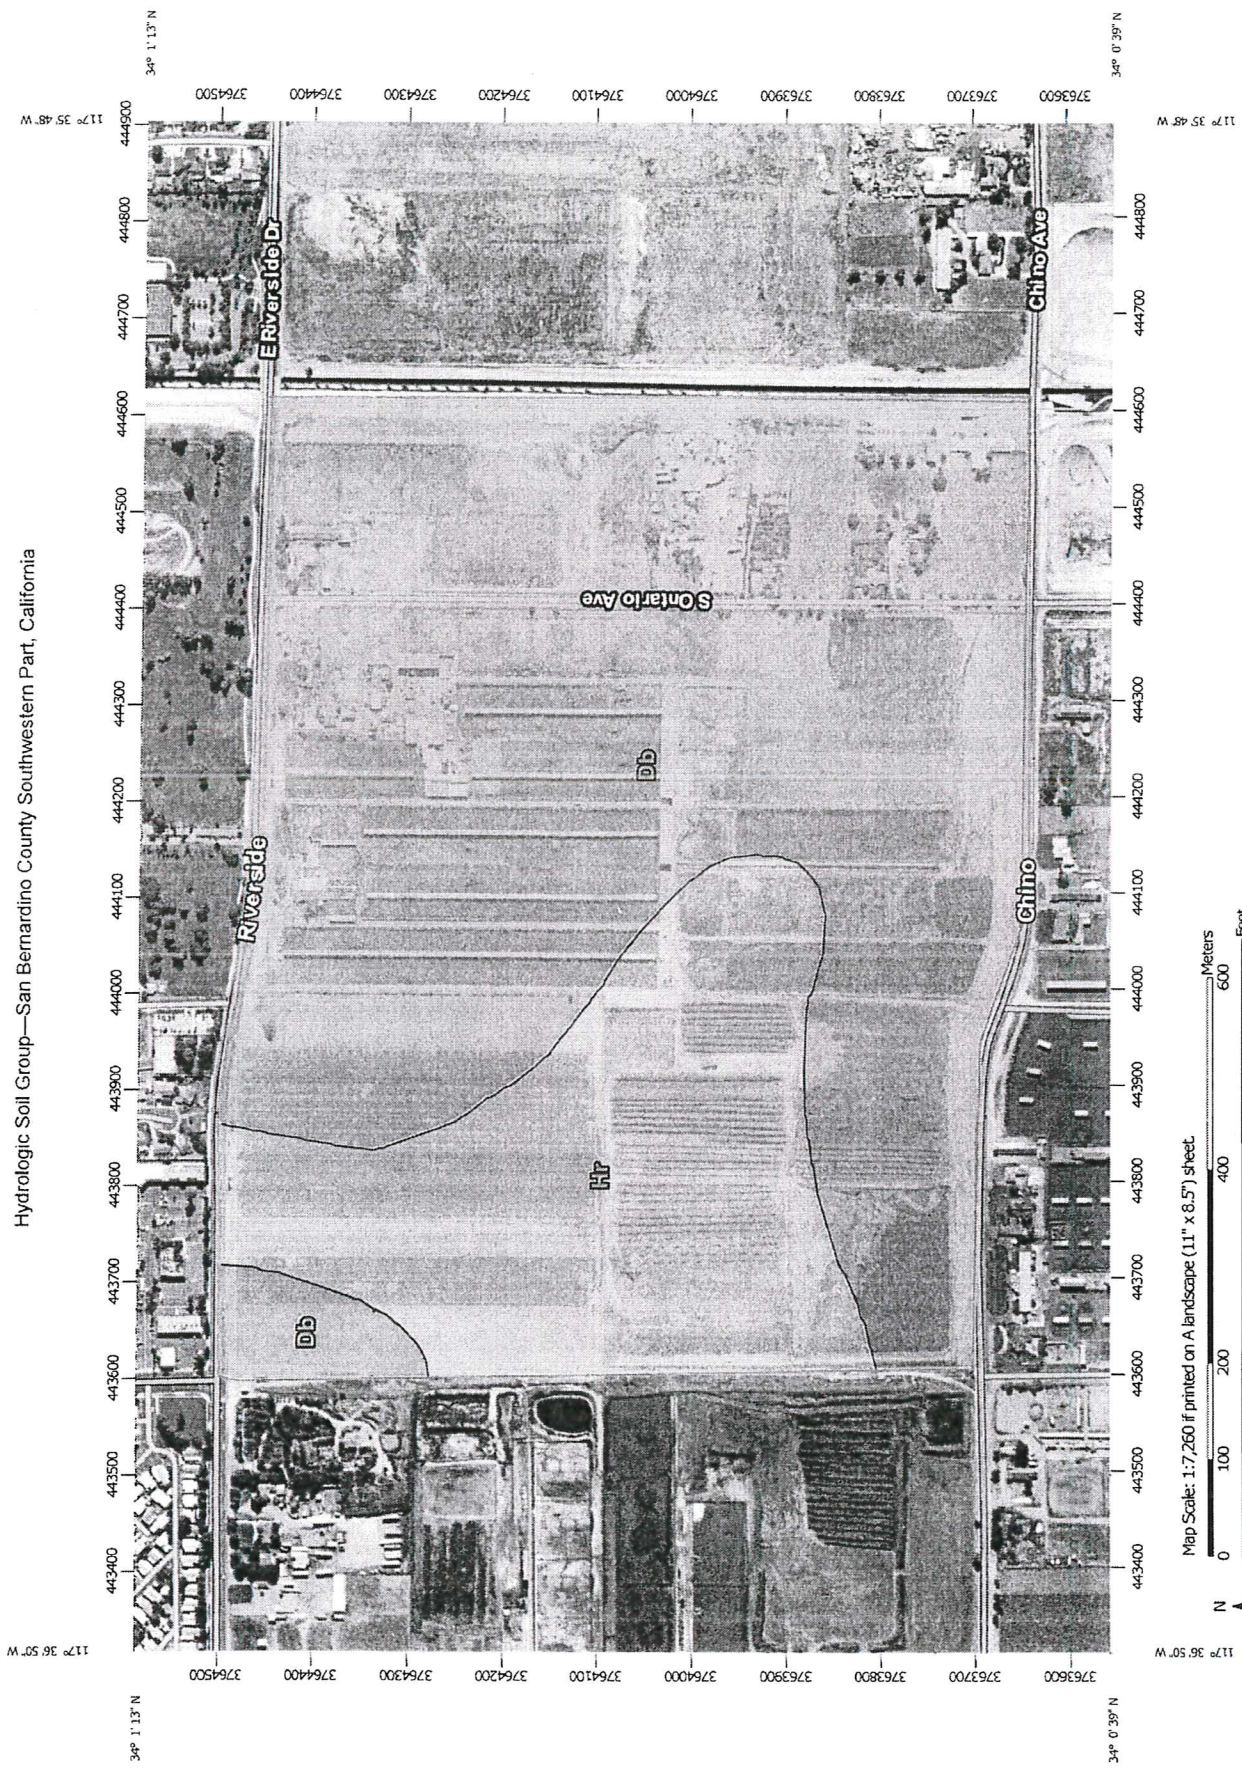




































Map Scale: 1:7,260 if printed on A landscape (11" x 8.5") sheet



**Natural Resources  
Conservation Service**

Web Soil Survey  
National Cooperative Soil Survey

## MAP LEGEND

	Area of Interest (AOI)		C
	Area of Interest (AOI)		C/D
	Soils		D
	Soil Rating Polygons		Not rated or not available
			
			
			
			
			
			
			
	Soil Rating Lines		Aerial Photography
			
			
			
			
			
			
			
	Soil Rating Points		
			
			
			

## MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
 Web Soil Survey URL: <http://websoilsurvey.nrcs.usda.gov>  
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.


Soil Survey Area: San Bernardino County Southwestern Part, California

Survey Area Data: Version 6, Sep 26, 2014

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: May 3, 2010—Jul 3, 2010

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

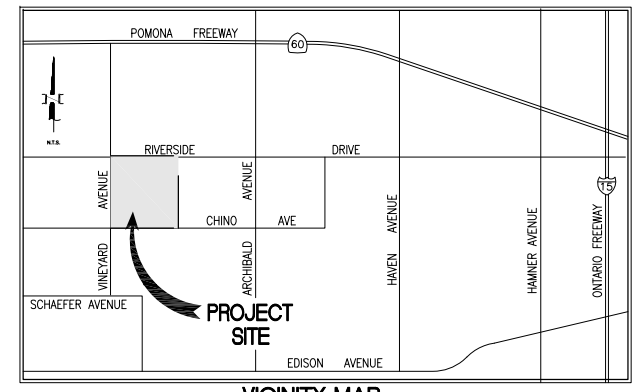


**LAND USE**

Planning Area	Dimensions	Area (SF)	Lot Count
P.A. 1	80x50	4,000	192 LOTS
P.A. 2	65x105	6,825	113 LOTS
P.A. 3	50x90	4,500	125 LOTS
P.A. 4	55x95	5,225	114 LOTS
P.A. 5	60x100	6,000	128 LOTS
P.A. 6	SCHOOL SITE		672 LOTS TOTAL

**TTM 19966 PARK TABLE**

LOT "A"	0.36 AC PARKLET	<b>PARCEL OWNERS</b>
LOT "B"	0.36 AC PARKLET	
LOT "C"	0.37 AC PARKLET	
<b>SUBTOTAL</b>	<b>1.09 AC</b>	P.A. 1 - NELSON PARCEL
LOT "A"	0.50 AC PARKLET	P.A. 2 - CV COMMUNITIES
LOT "B"	0.28 AC PARKLET	P.A. 3 - CV COMMUNITIES
<b>SUBTOTAL</b>	<b>0.78 AC</b>	P.A. 4 - CV COMMUNITIES
LOT "A"	0.48 AC PARKLET	P.A. 5 - CV COMMUNITIES
LOT "B"	0.48 AC PARKLET	
<b>SUBTOTAL</b>	<b>0.96 AC</b>	
LOT "A"	0.30 AC PARKLET	
LOT "B"	0.31 AC PARKLET	
<b>SUBTOTAL</b>	<b>0.61 AC</b>	
<b>ARMSTRONG PARK</b>	<b>2.06 AC PARK</b>	
<b>5.50 AC TOTAL</b>	<b>3.67 AC REQUIRED</b>	

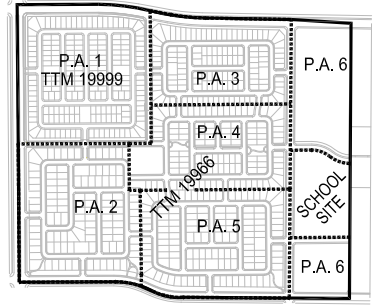

PREPARED FOR:

CV Communities

PREPARED BY:

**MDS** ROSS  
CORPORATE CONSULTING SCHULTZ  
PLANNERS ENGINEERS SURVEYORS

17200 Redhill Ave.  
Suite 100  
Irvine, CA 92614  
Voice: 949-251-8851  
Fax: 949-251-0516

PLANNING AREAS

DATE PREPARED: NOVEMBER 04, 2015

**TENTATIVE TRACT NO. 19966**


**SITE PLAN**

**DE BOER PARCELS**


**ARMSTRONG RANCH SPECIFIC PLAN**

NEW MODEL COLONY

CITY OF ONTARIO, COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA



DATE	NO.	REVISIONS

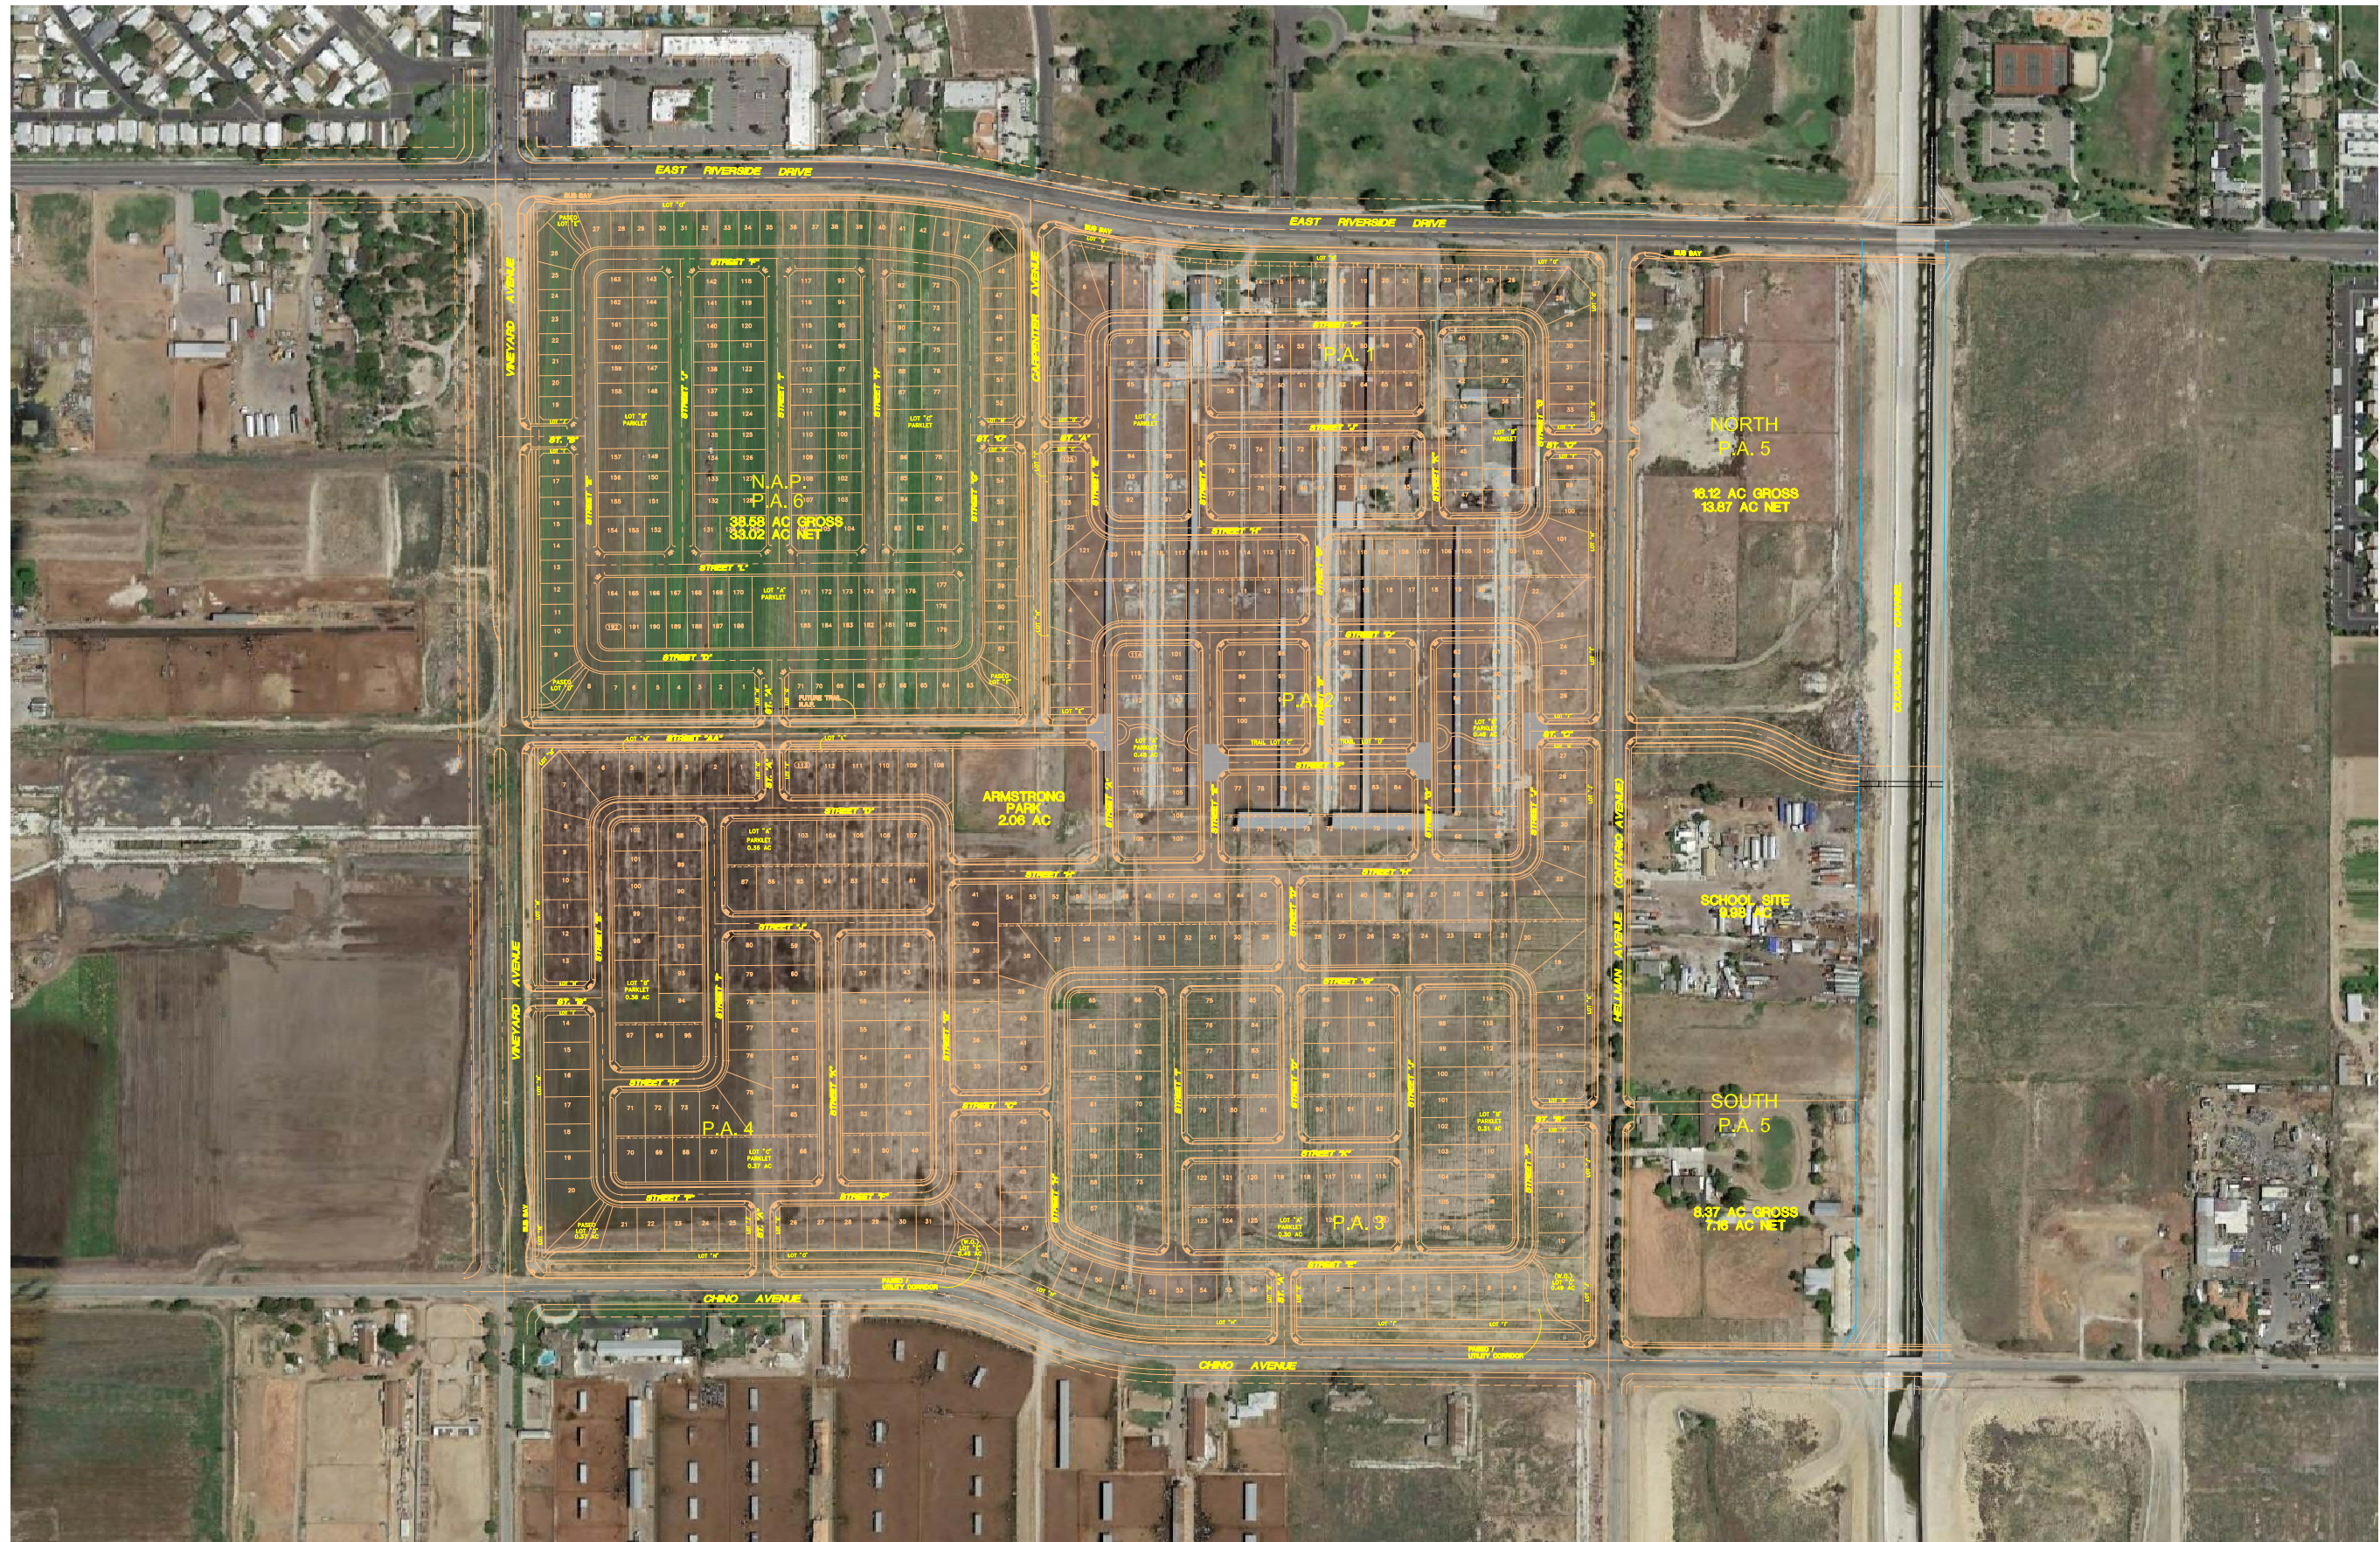

PREPARED FOR:






CV Communities

PREPARED BY:







PLANNERS ENGINEERS SURVEYORS

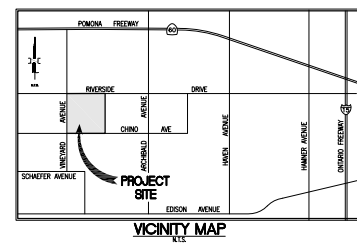

DATE:	NO.	REVISIONS

DATE PREPARED: NOVEMBER 04, 2015  
**TENTATIVE TRACT NO. 19966**  
**ALT. PARK SITE - AERIAL EXHIBIT**  
**DE BOER PARCELS**  
**ARMSTRONG RANCH SPECIFIC PLAN**  
 NEW MODEL COLONY  
 CITY OF ONTARIO, COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA  
(S:\0350\PRELIM\KRM\ EXHIBIT.dwg 11/04/15)

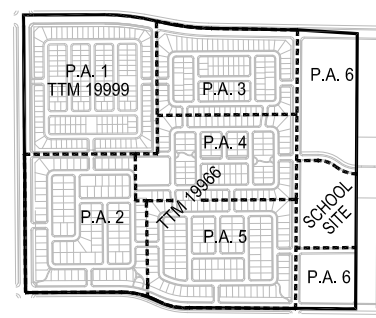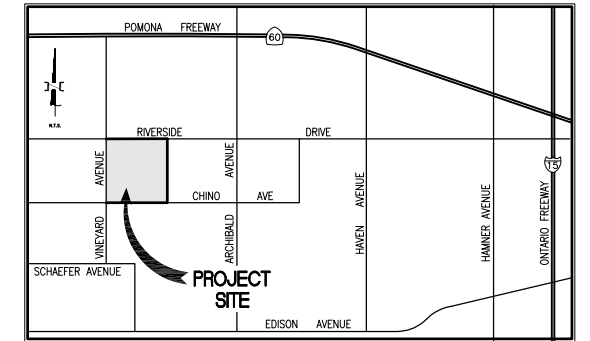


PREPARED FOR:  
  
**CV Communities**

PREPARED BY:  
  
**MDS**  
PLANNERS ENGINEERS SURVEYORS

DATE PREPARED: NOVEMBER 14, 2015  
**TTM 19966 AND 19999**  
**EXISTING S.D. EXHIBIT**  
**ARMSTRONG RANCH SPECIFIC PLAN**  
 NEW MODEL COLONY  
 CITY OF ONTARIO, COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA

k:\80350\PRELIM\EXISTING-SD.dwg 11/04/15

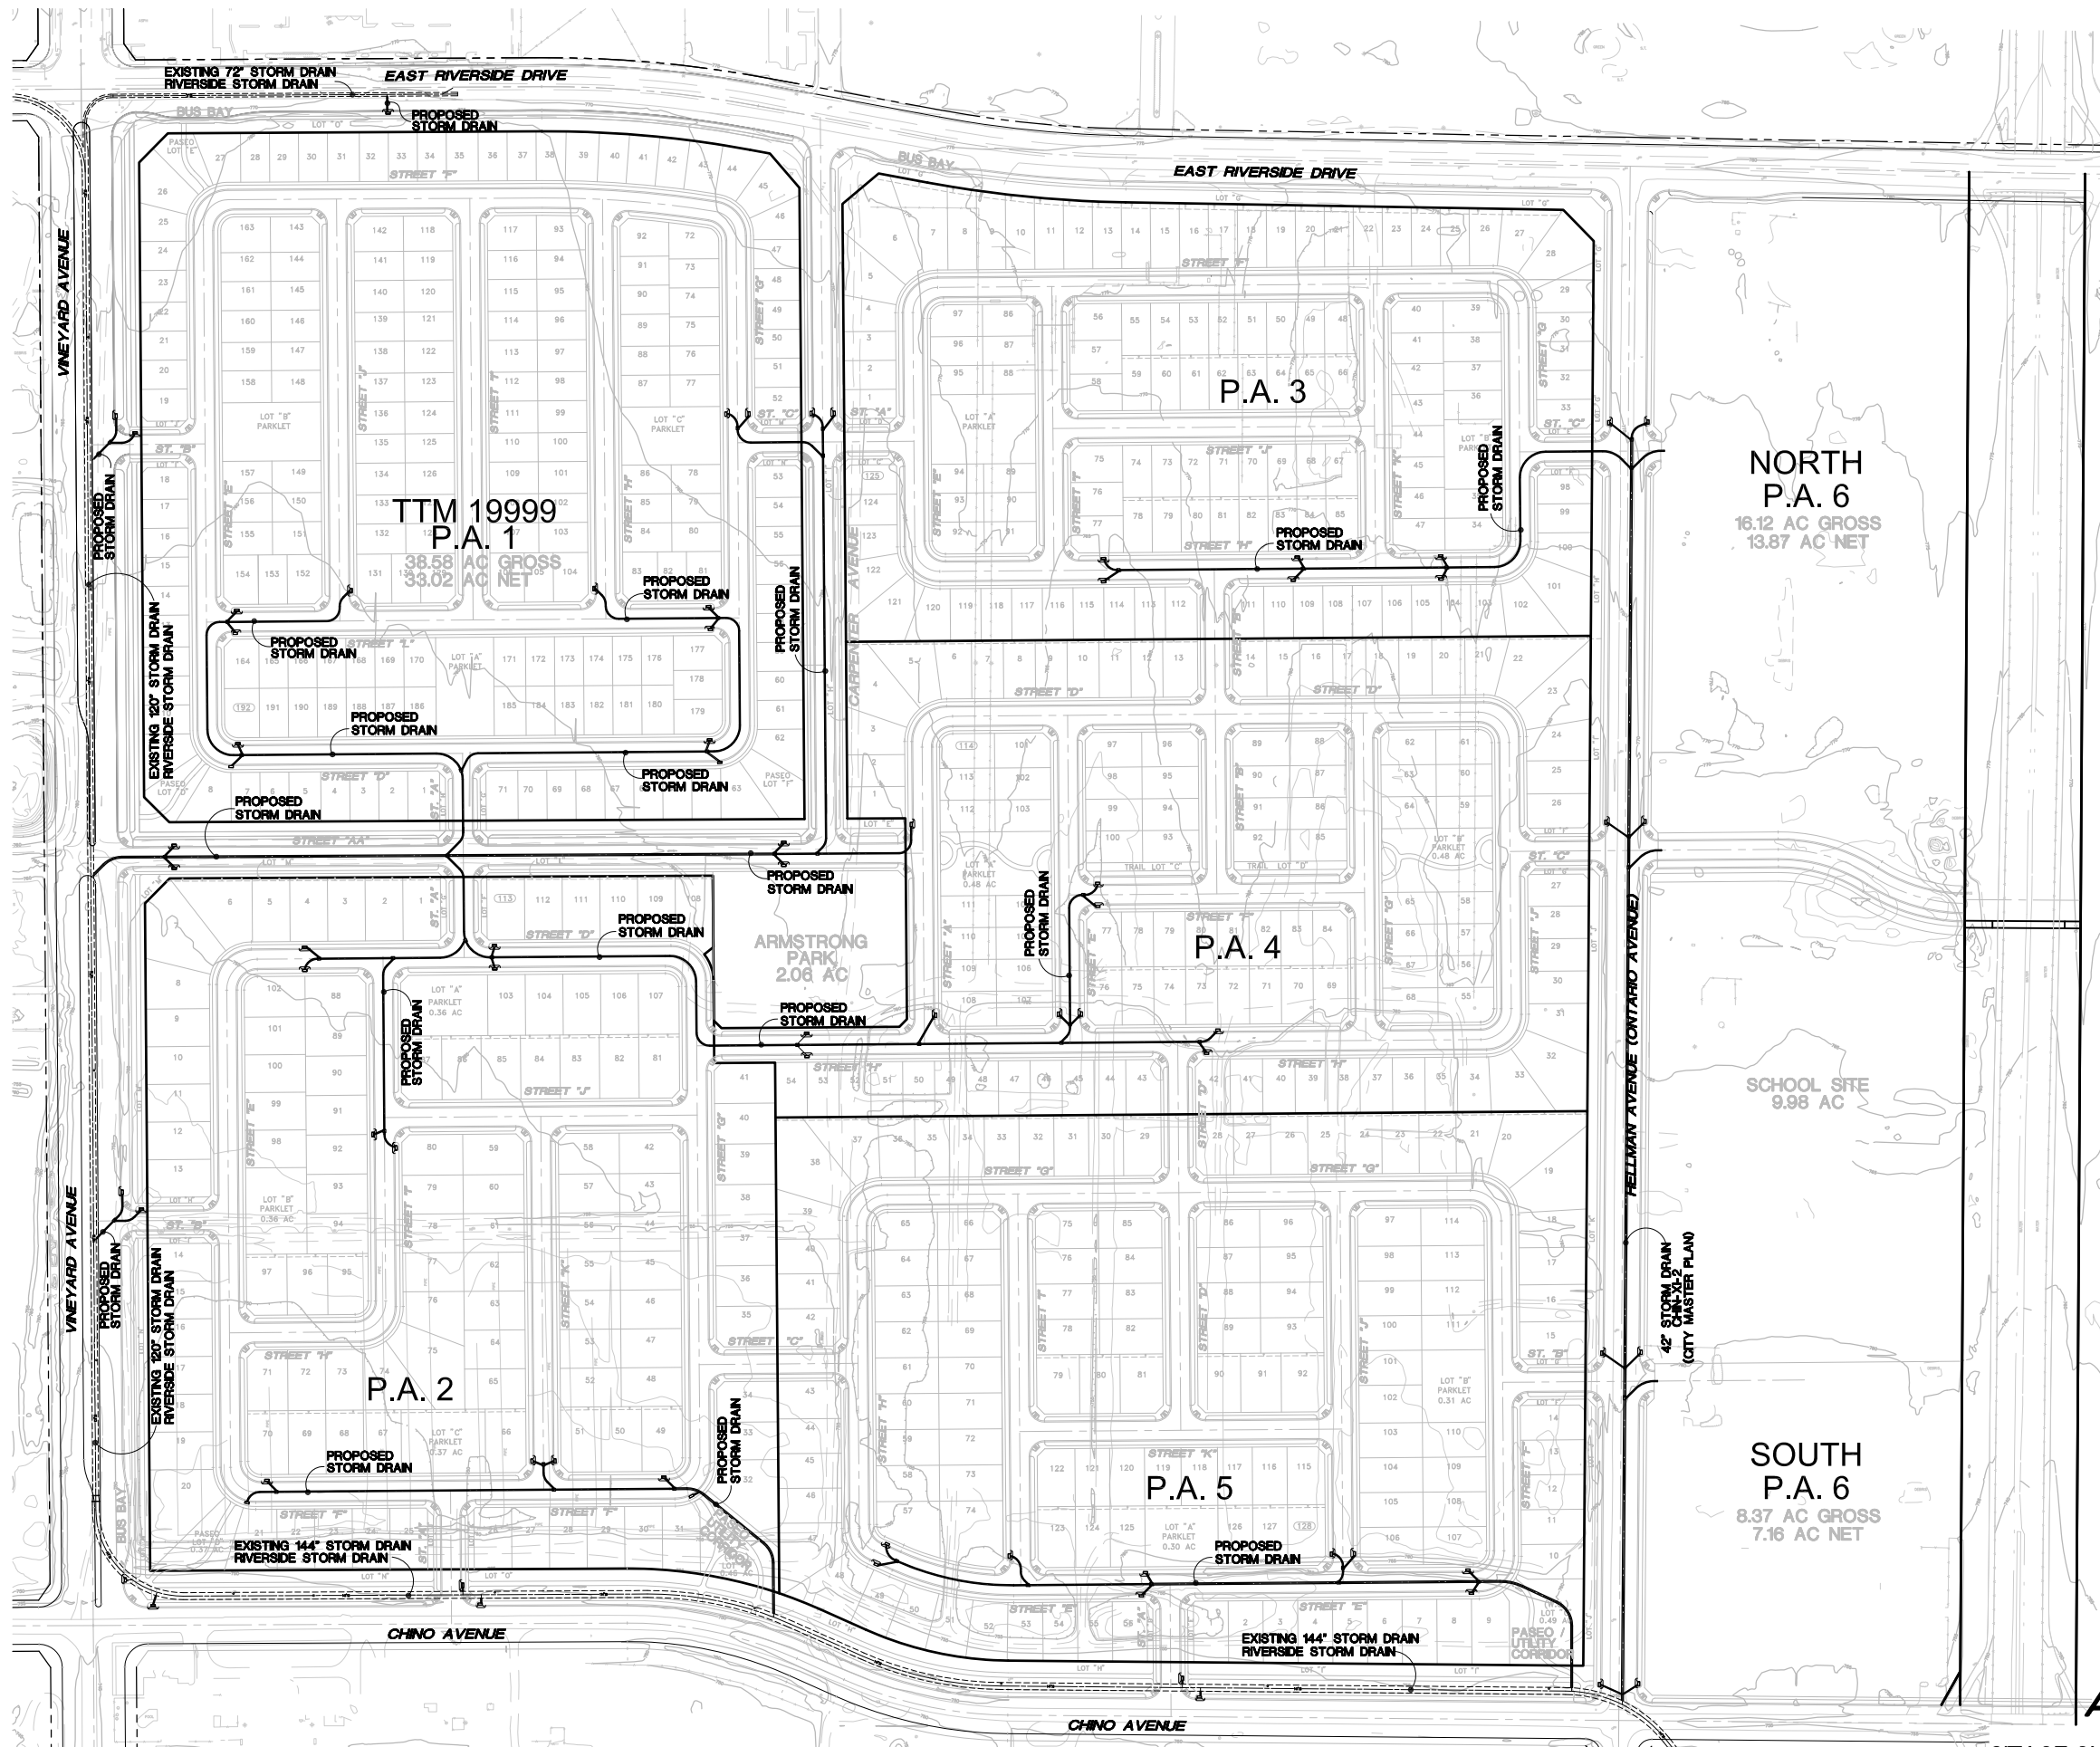

EAST RIVERSIDE DRIVE

EAST RIVERSIDE DRIVE

TTM 19999  
P.A. 1  
38.58 AC GROSS  
33.02 AC NET

P.A. 3

NORTH  
P.A. 6  
16.12 AC GROSS  
13.87 AC NET

P.A. 4





P.A. 2

P.A. 5

SOUTH  
P.A. 6  
8.37 AC GROSS  
7.16 AC NET

CHINO AVENUE

CHINO AVENUE

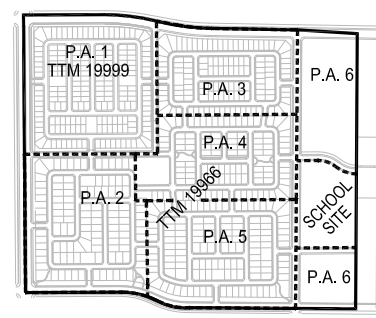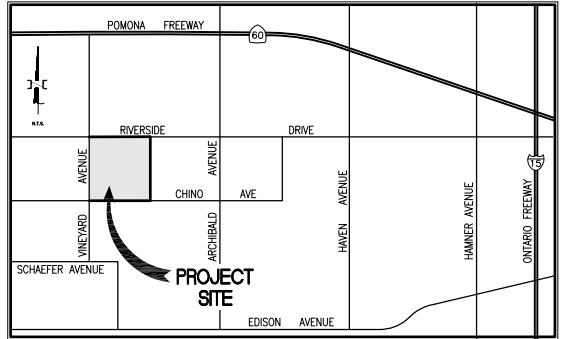

PREPARED FOR:



CV Communities



PREPARED BY:

**MDS** HOESE  
 CHEN VULTURA SCHULTZ  
 PLANNERS ENGINEERS SURVEYORS

17320 Ruffolo Ave.  
 Suite 200  
 Irvine, CA 92614  
 Voice: 949-251-8821  
 Fax: 949-251-8816

DATE PREPARED: NOVEMBER 14, 2015  
**TTM 19966 AND 19999**  
**PROPOSED S.D. EXHIBIT**  
**ARMSTRONG RANCH SPECIFIC PLAN**  
 NEW MODEL COLONY

CITY OF ONTARIO, COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA  
 I:\80350\PRELIM\PROPOSED-SD.dwg 11/04/15

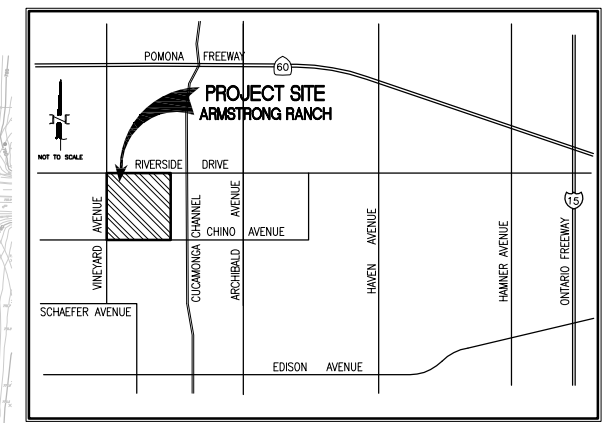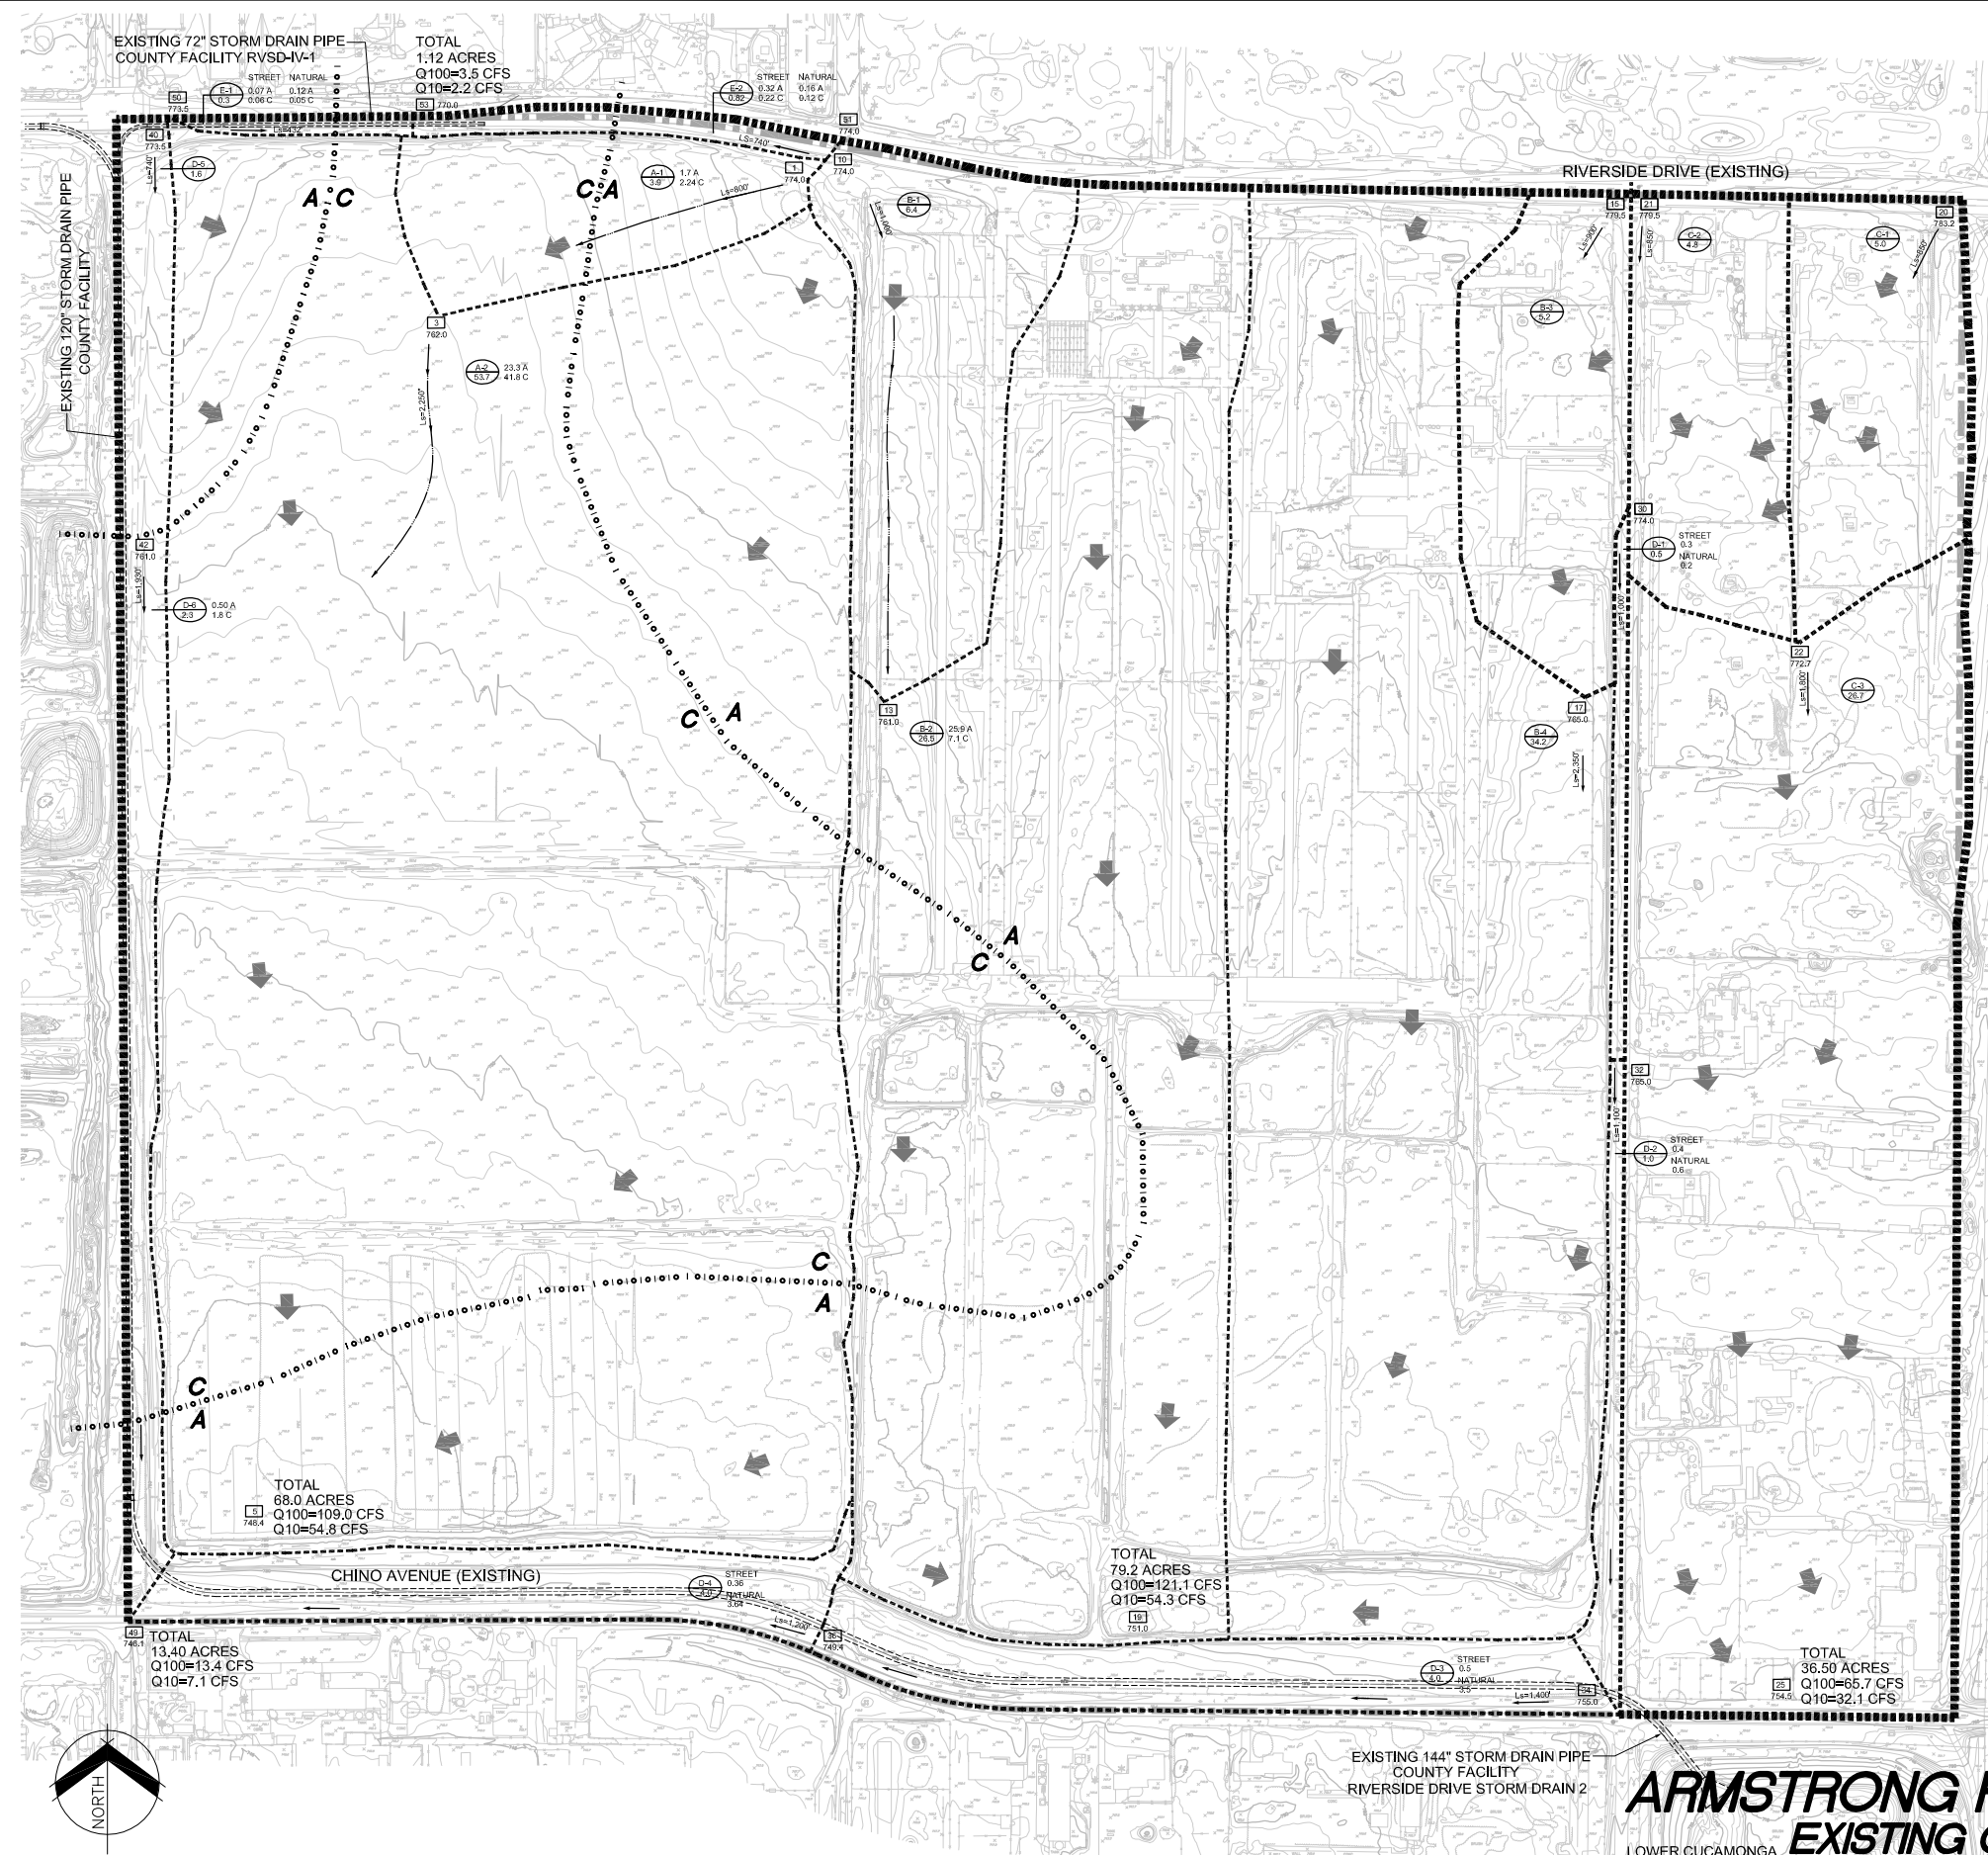

VICINITY MAP  
NOT TO SCALE

**NOTES**

1. SOIL TYPE "A" AND TYPE "C"
2. PROJECT SITE IS WITHIN HYDROLOGIC CONDITIONS OF CONCERN (HCOC) EXEMPT AREAS.

**LEGEND**

- TRACT BOUNDARY
- DRAINAGE AREA BOUNDARY
- SUB-AREA BOUNDARY
- SUB-AREA DESIGNATION AREA (acres)
- DIRECTION OF SURFACE FLOW
- FLOW LENGTH (feet)
- NODE NUMBER
- FINISH SURFACE ELEVATION
- INVERT ELEVATION
- SOIL TYPE BOUNDARY LINE

**TOTAL PRE-DEVELOPED PEAK FLOW**

Q10 = 151 CFS  
Q100 = 313 CFS

PREPARED FOR:




PREPARED BY:





DATE PREPARED: OCTOBER 8, 2015

**ARMSTRONG RANCH SPECIFIC PLAN  
EXISTING CONDITION HYDROLOGY MAP  
DE BOER PARCELS**


NEW MODEL COLONY  
CITY OF ONTARIO, COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA



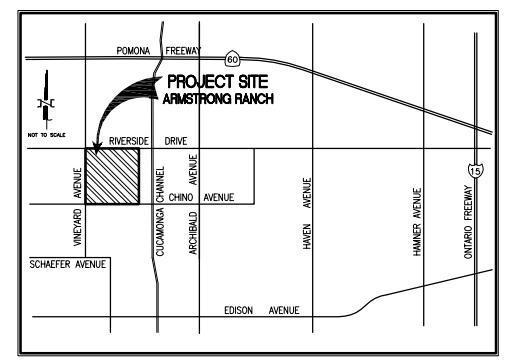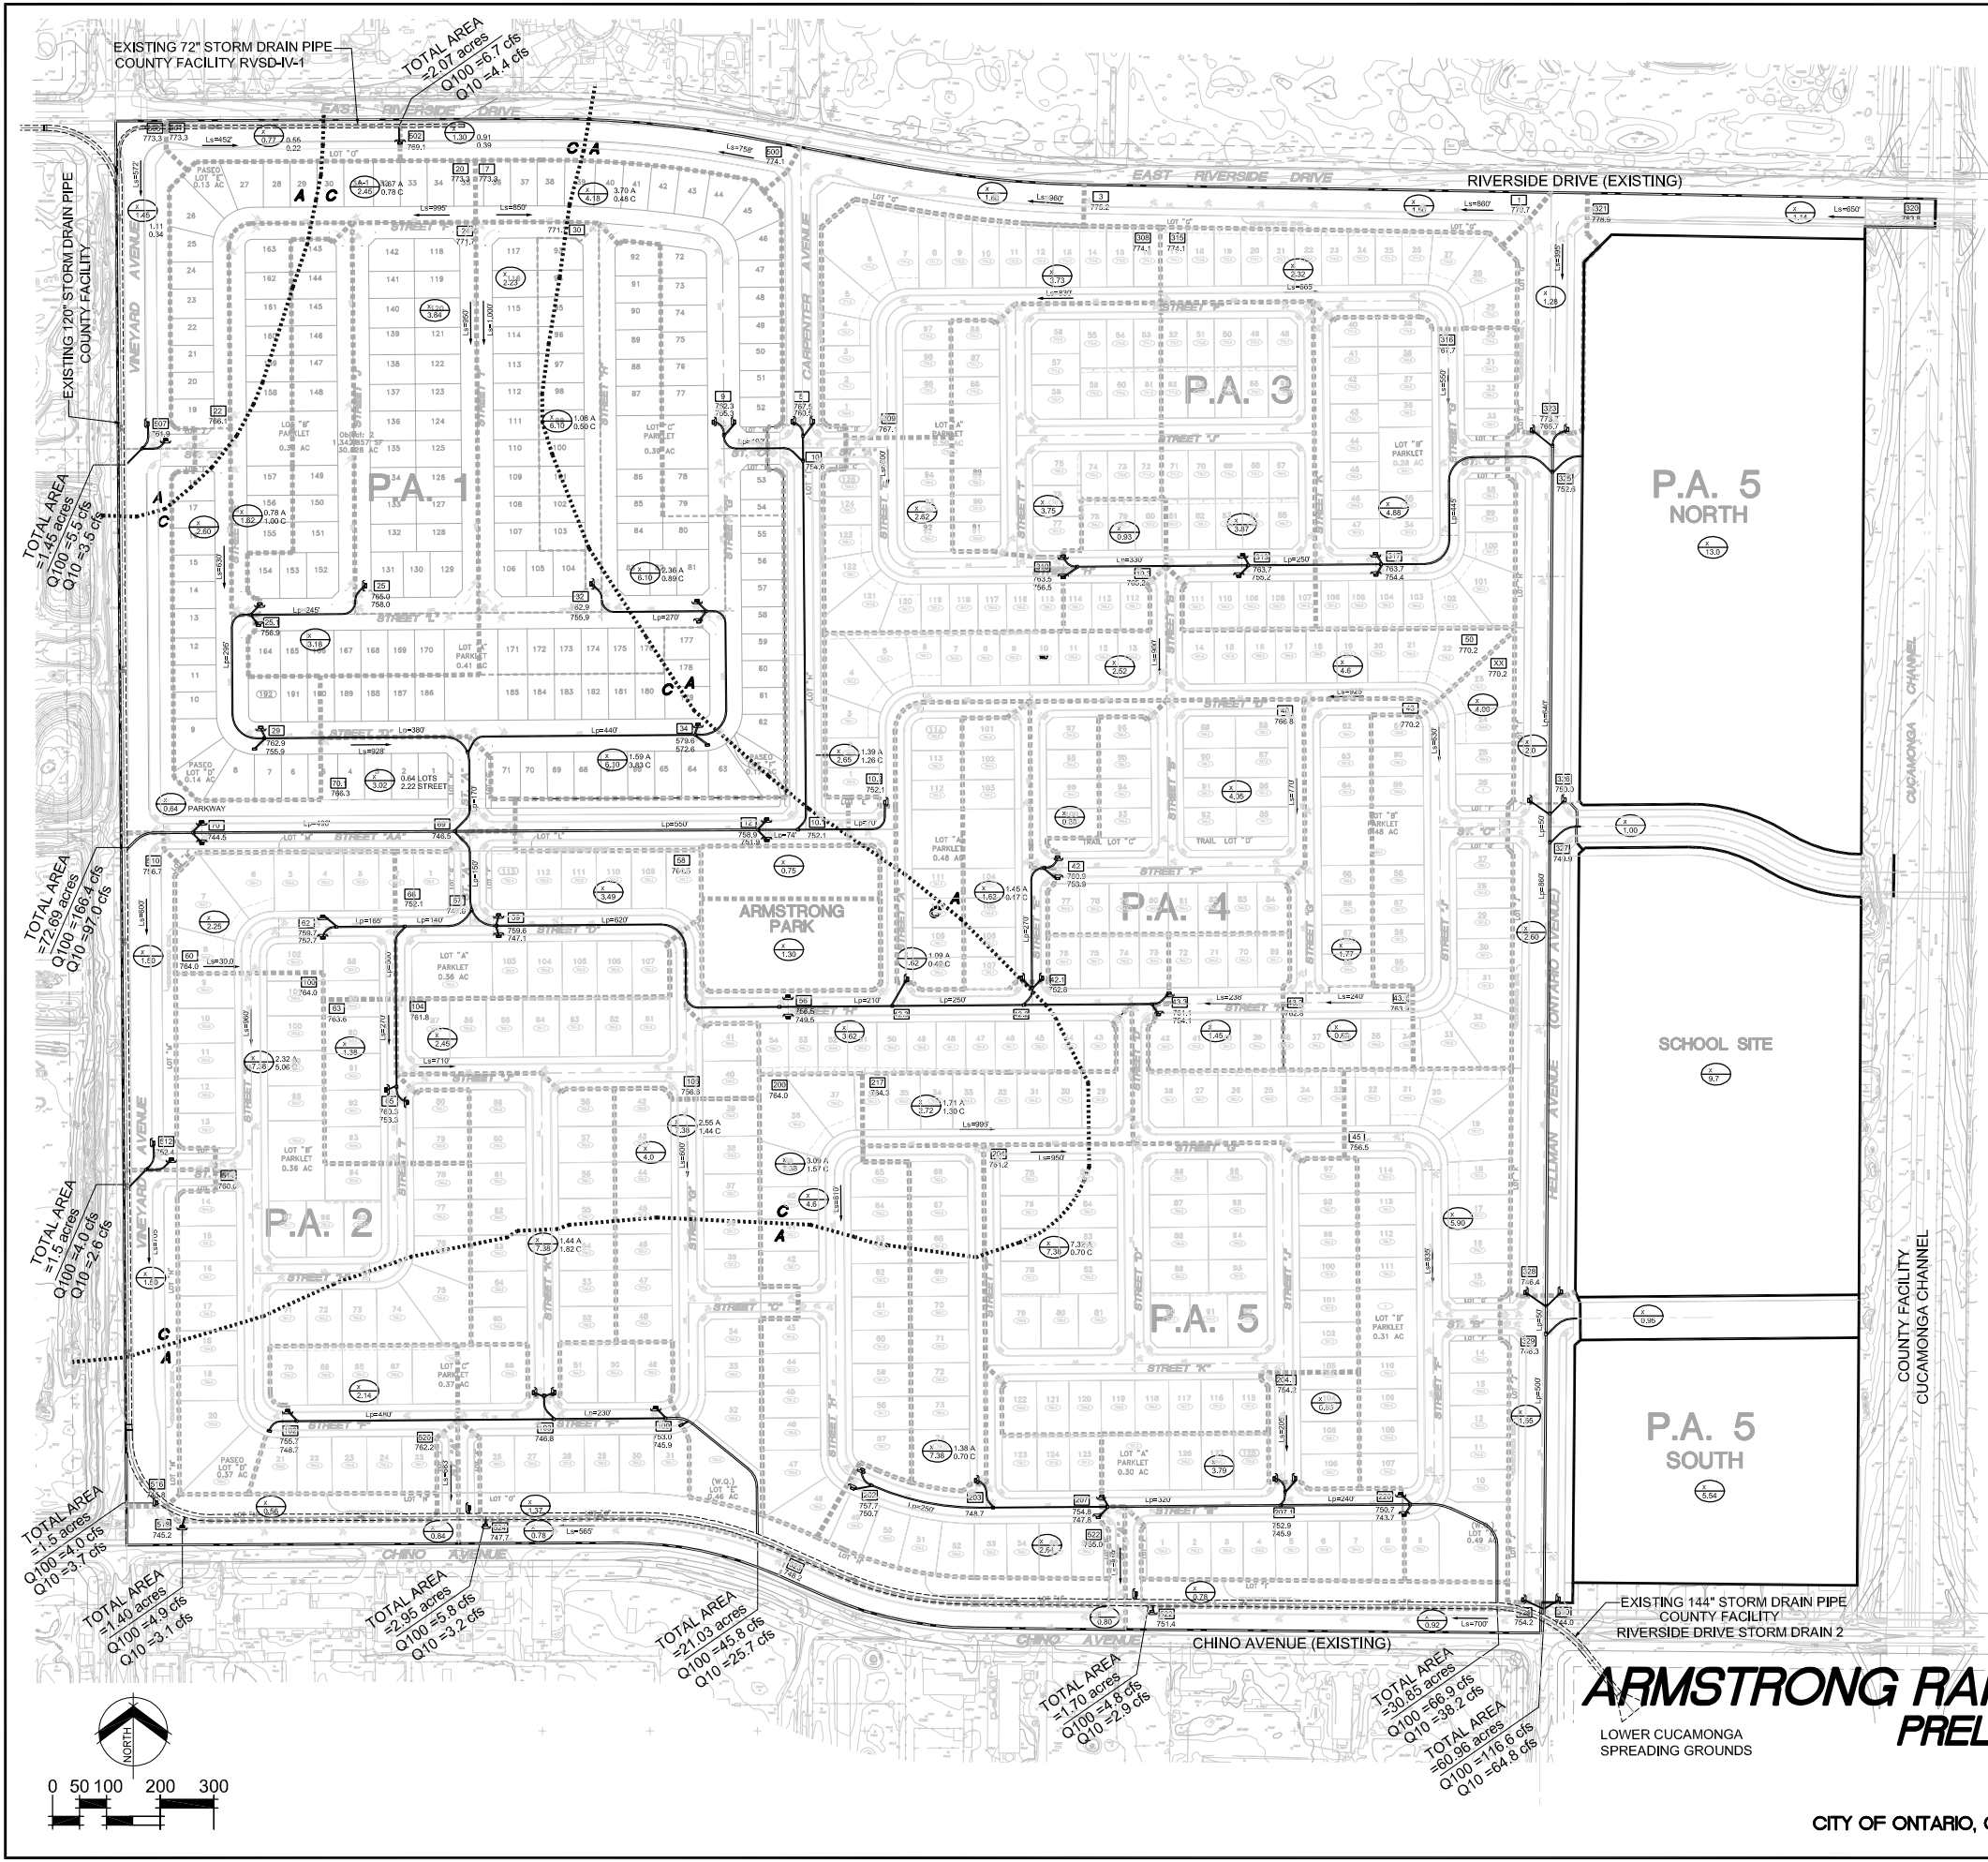

VICINITY MAP  
NOT TO SCALE

- NOTES**
- SOIL TYPE "A" AND TYPE "C"
  - PROJECT SITE IS WITHIN HYDROLOGIC CONDITIONS OF CONCERN (HCOC) EXEMPT AREAS.

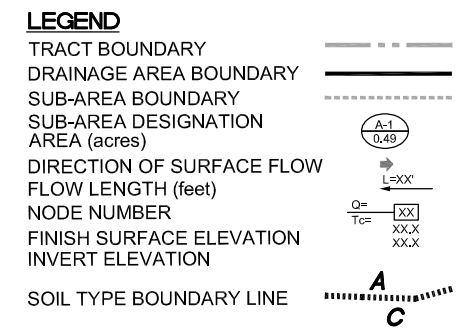

**TOTAL POST-DEVELOPED PEAK FLOW**

$Q_{10} = 249$  CFS  
 $Q_{100} = 431$  CFS

PREPARED FOR:

CV Communities


PREPARED BY:

**MDS CONSULTING**  
 PLANNERS ENGINEERS SURVEYORS


DATE PREPARED: OCTOBER 8, 2015

# ARMSTRONG RANCH SPECIFIC PLAN PRELIMINARY HYDROLOGY MAP DE BOER PARCELS

NEW MODEL COLONY  
 CITY OF ONTARIO, COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA





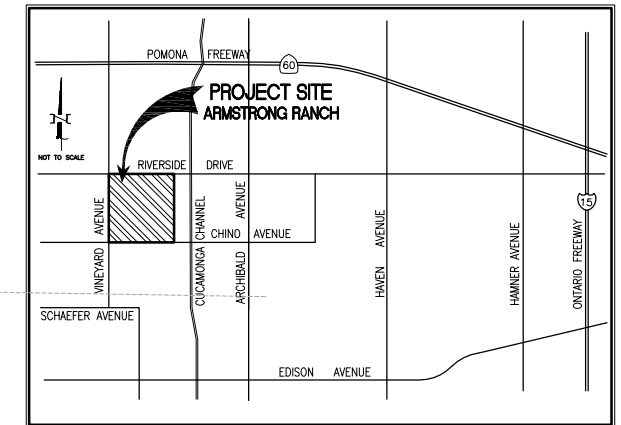

VICINITY MAP  
NOT TO SCALE

LEGEND

- PROJECT BOUNDARY
- ..... DRAINAGE AREA BOUNDARY
- DA1 / DMA-A  
13.01 AC  
586,842 SF  
V<sub>bmp</sub>=13,000
- DA1 / DMA-B  
136 AC  
59,030 SF  
V<sub>bmp</sub>=6,783
- DA1 / DMA-C  
4.89 AC  
198,972 SF  
V<sub>bmp</sub>=18,179
- DA1 / DMA-D  
2.66 AC  
117,166 SF  
V<sub>bmp</sub>=4,267
- DA1 / DMA-E  
22.81 AC  
993,498 SF  
V<sub>bmp</sub>=29,838
- DA1 / DMA-F  
7.04 AC  
306,930 SF  
V<sub>bmp</sub>=13,868
- DA2  
2190 AC  
963,147 SF  
V<sub>bmp</sub>=94,743
- DA3  
28.78 AC  
1,296,250 SF  
V<sub>bmp</sub>=47,212
- DA4  
8.37 AC  
277,650 SF  
V<sub>bmp</sub>=10,106
- DA5 DMA-A  
22.07 AC  
981,544 SF  
V<sub>bmp</sub>=35,012
- DA5 DMA-B  
13.01 AC  
586,842 SF  
V<sub>bmp</sub>=20,639
- [Pattern Box] LOCATION OF UNDERGROUND INFILTRATION BASIN

PREPARED FOR:



CV Communities

PREPARED BY:

**MDS** CONSULTING  
PLANNERS ENGINEERS SURVEYORS  
17200 Redhill Ave.  
Suite 250  
Irvine, CA 92614  
Voice: 949-251-8821  
FAX: 949-251-0516

DATE PREPARED: OCTOBER 2015

# ARMSTRONG RANCH SPECIFIC PLAN PRELIMINARY WQMP DE BOER PARCELS

NEW MODEL COLONY  
CITY OF ONTARIO, COUNTY OF SAN BERNARDINO, STATE OF CALIFORNIA

